

CROSSFLOW TURBINE

type: BYS/T3

- with manually operated flow regulator
- Rotor diameter : 200 mm
- Nozzle width : 50 to 920 mm

Flow: $Q = Q_s \cdot b_0 \cdot \sqrt{H_n}$

where: Q_s = spec. discharge = 0.15 l/s.

b_0 = nozzle width (mm)

H_n = net head (m)

Rated speed: $N = n_s \cdot \sqrt{H_n}$

$$n_s = \underline{197}$$

$$\Rightarrow H_n = 5.2 \text{ m} \quad Q = 300 \text{ l/s.}$$

$$\text{Nozzle width: } b_0 = \frac{300}{0.15 \cdot \sqrt{5.2}} = \underline{877 \text{ mm}}$$

$$\bullet \underline{b_0 = 920 \text{ mm}} \quad (\text{standard size})$$

$$\bullet N = 197 \cdot \sqrt{5.2} = \underline{450 \text{ RPM}}$$

$$\bullet P = \frac{300 \cdot 5.2}{102} \cdot 0.67 = \underline{10 \text{ kW}}$$

SIVAT

Vornbüchelstrasse 14, CH-9000 St. Gallen,
Switzerland, Tel. 071 23 3451

SIVAT
Schweizerische Kontaktstelle für Angewandte Hydro- und Hy-
draulische Ingenieurwissenschaften und Erfindungen
zusammenarbeitend mit der Hochschule St. Gallen

SIVAT
Seo est edito per: Approfondito, L. Ing. G. L. L.
Institute for Latin American Research and Development
Cooperation University of North Carolina

SIVAT
Centro de Investigación y Desarrollo, Approfondito, L. Ing. G. L. L.
Instituto de Investigación y Desarrollo, Approfondito, L. Ing. G. L. L.
Cooperation University of North Carolina

CF Turbine: BYS /T3

Hints for the use of the drawing set:

- Drawings are divided into sub-assembly and assembly groups. The corresponding parts-list bears the same number code as the assembly drawing.
- In addition, the whole set is numbered serially starting with S 01 and upto S 75.
- Manufacturing instructions of difficult parts and the assembly procedure are shown on the pages preceeding the workshop drawings.
- Code "b₀" refers to the variable nozzle width. All drawings with b₀-related measurements have to be completed by adding the chosen b₀. Example: b₀ = 920 as calculated. For drawing 01/00 : b₀ + 70 = 920 + 70 = 990 mm; b₀ + 130 = 920 + 130 = 1050 mm.
- On drawings where the number of holes is variable due to variable width, the correct center to center distances are to be found in the respective row of b₀. Example: Drwg. 03/05: Measurements A to L read from row b₀ 920 → A, B, K, L = 86 mm. C, D, E, F, G, H, I, J = 87.
- Depending on the head under which the turbine is to operate and on the rotor width, the rotor requires one or several supporting disks. One of the drawings S 29 to S 33 is to be used accordingly for the fabrication of the respective rotor.

SKAT

SKAT
Schweizerische Kontaktstelle für Angepaßte Technik am ILE,
Institut für Lateinamerikaforschung und Entwicklungs-
zusammenarbeit an der Hochschule St.Gallen



SKAT
Swiss Center for Appropriate Technology at ILE,
Institute for Latin-American Research and for Development
Co-operation, University of Saint-Gall

Varnbühlstraße 14, CH-9000 St.Gallen,
Switzerland, Tel. 071 23 34 81

SKAT
Centre Suisse pour la Technologie Appropriée à l'ILE,
Institut de Recherche sur l'Amérique Latine et de
Coopération au Développement, Université de Saint-Gall

SKAT
Centro Suizo de Tecnología Apropriada en el ILE,
Instituto de Investigación sobre América Latina y
de Cooperación al Desarrollo, Universidad de Sankt-Gallen

$b_0(f) P, H_n$

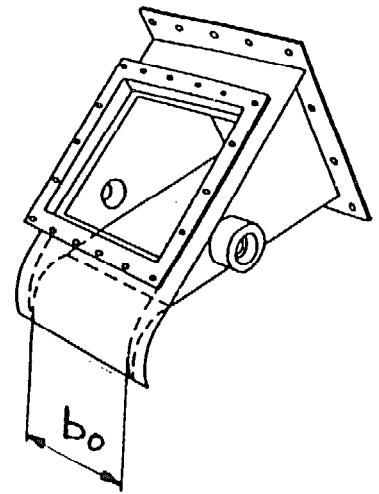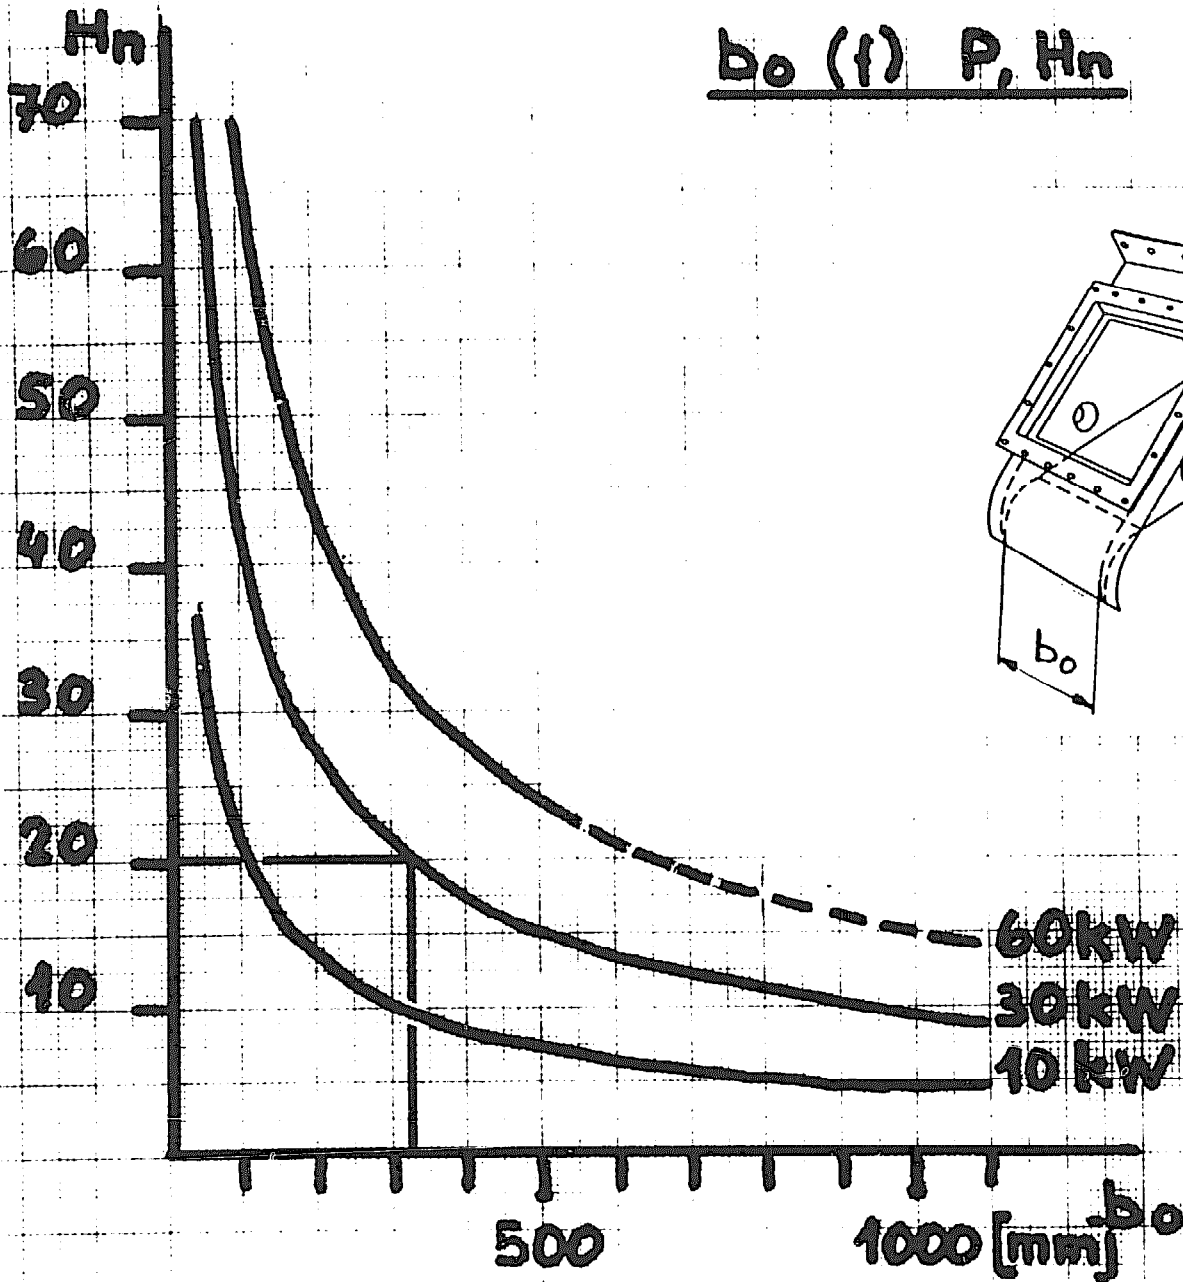

Turbine T3:

$$b_0 = \frac{102 P}{\eta \cdot H_n Q_s \sqrt{H_n}}$$

$$\underline{b_0 = \frac{971.4 P}{H_n \cdot \sqrt{H_n}}}$$



with: $\eta = 0.7$


$Q_s = 0.15$


Example:





$P = 30 \text{ kW}, H_n = 20 \text{ m}$


$\rightarrow b_0 = 325 \text{ mm}$

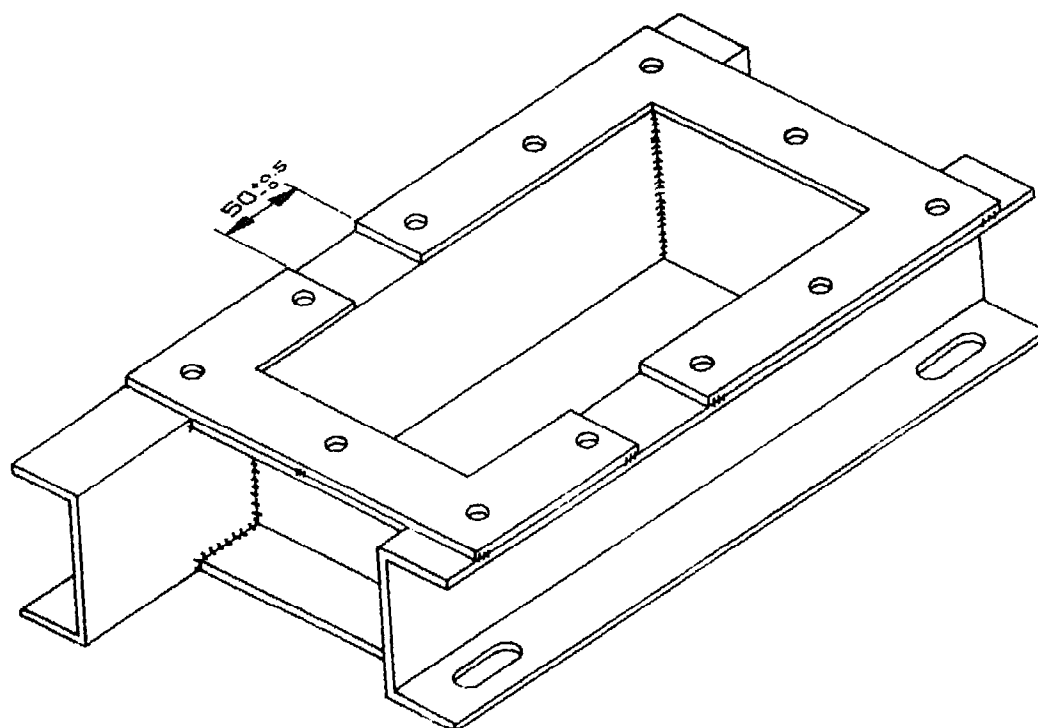
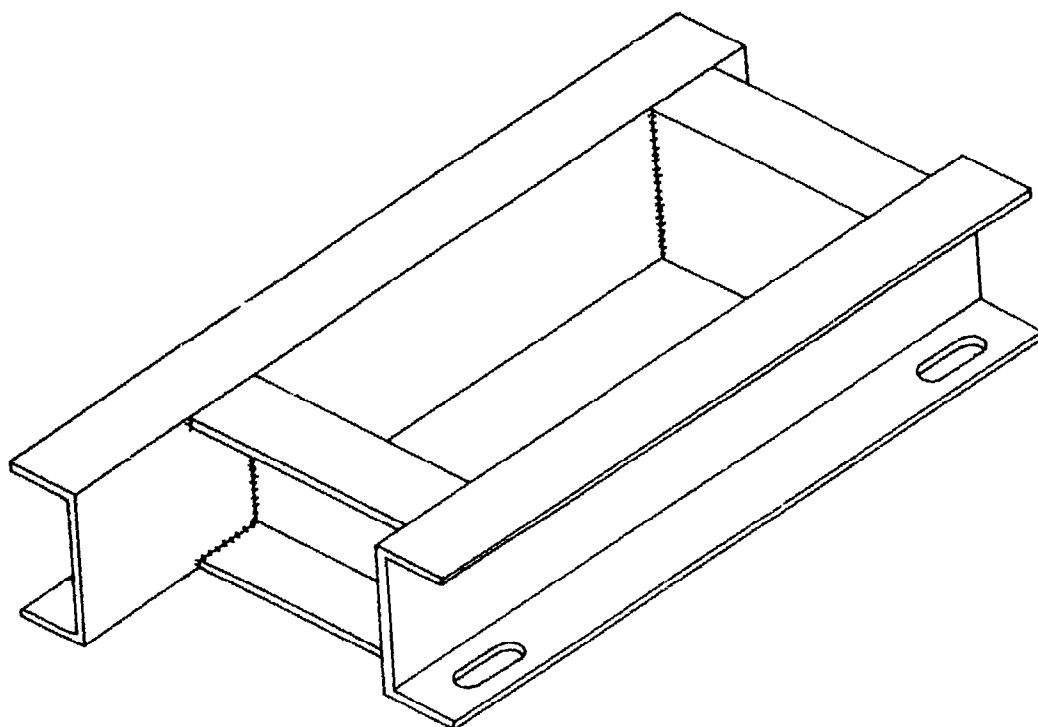


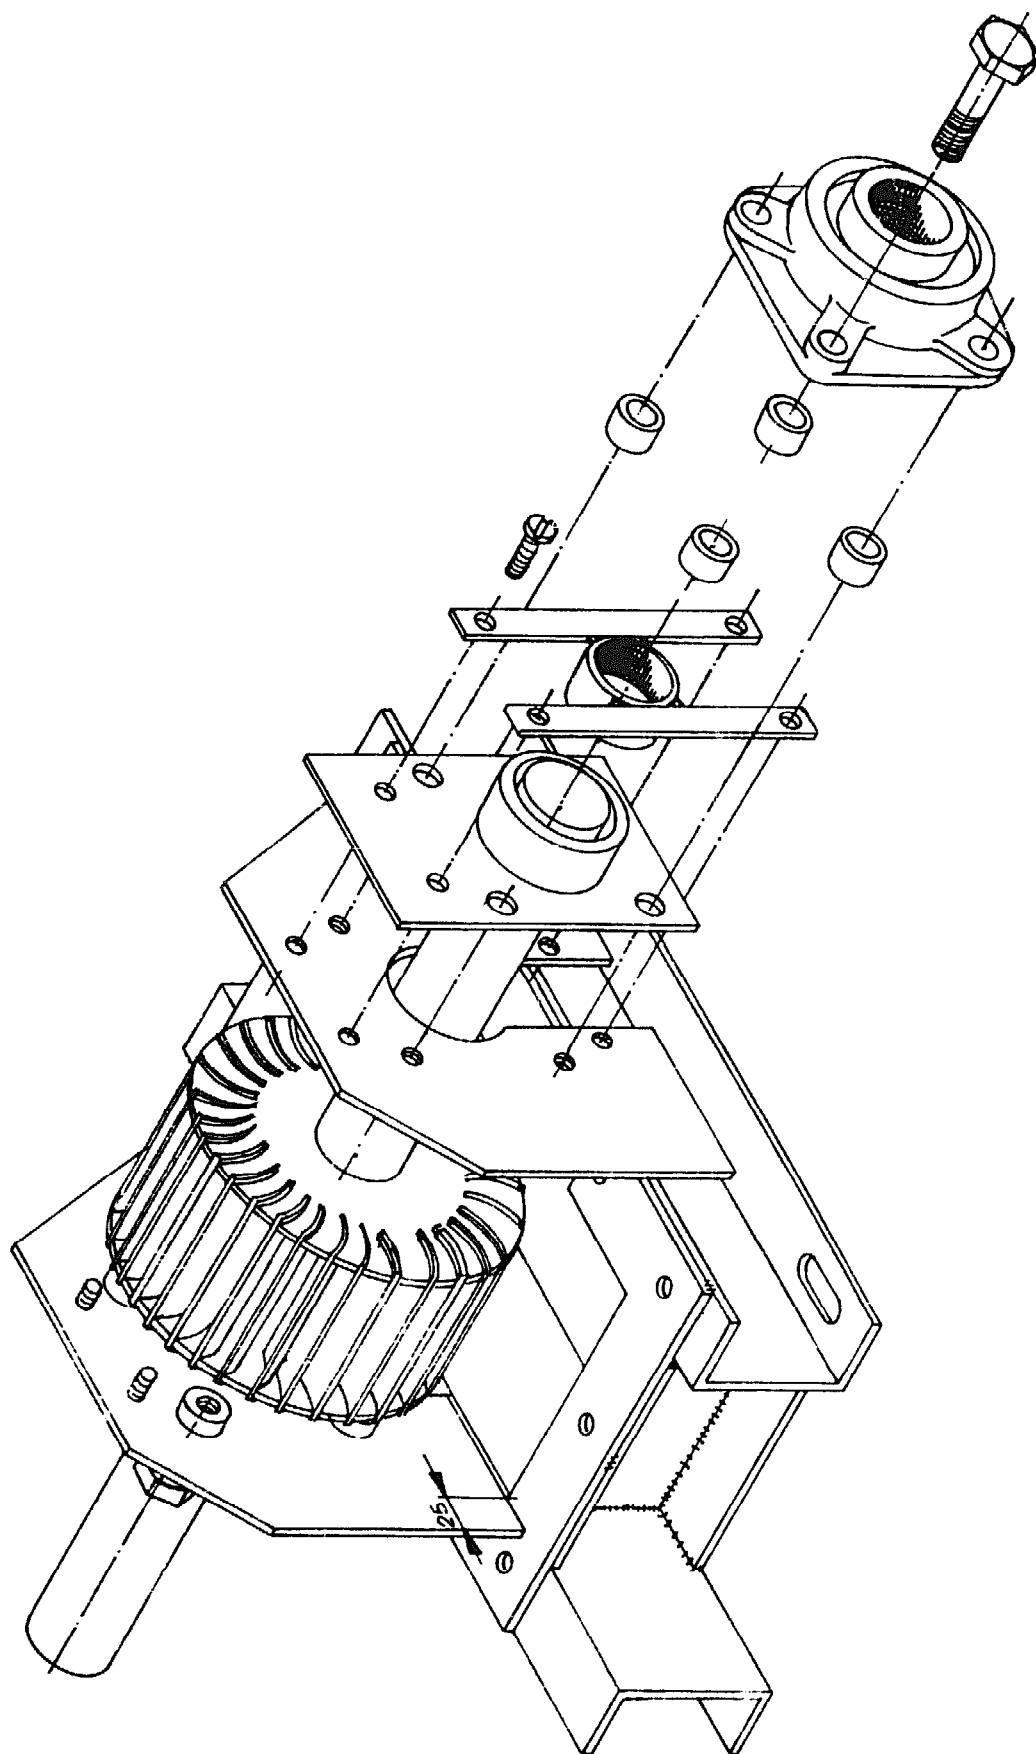


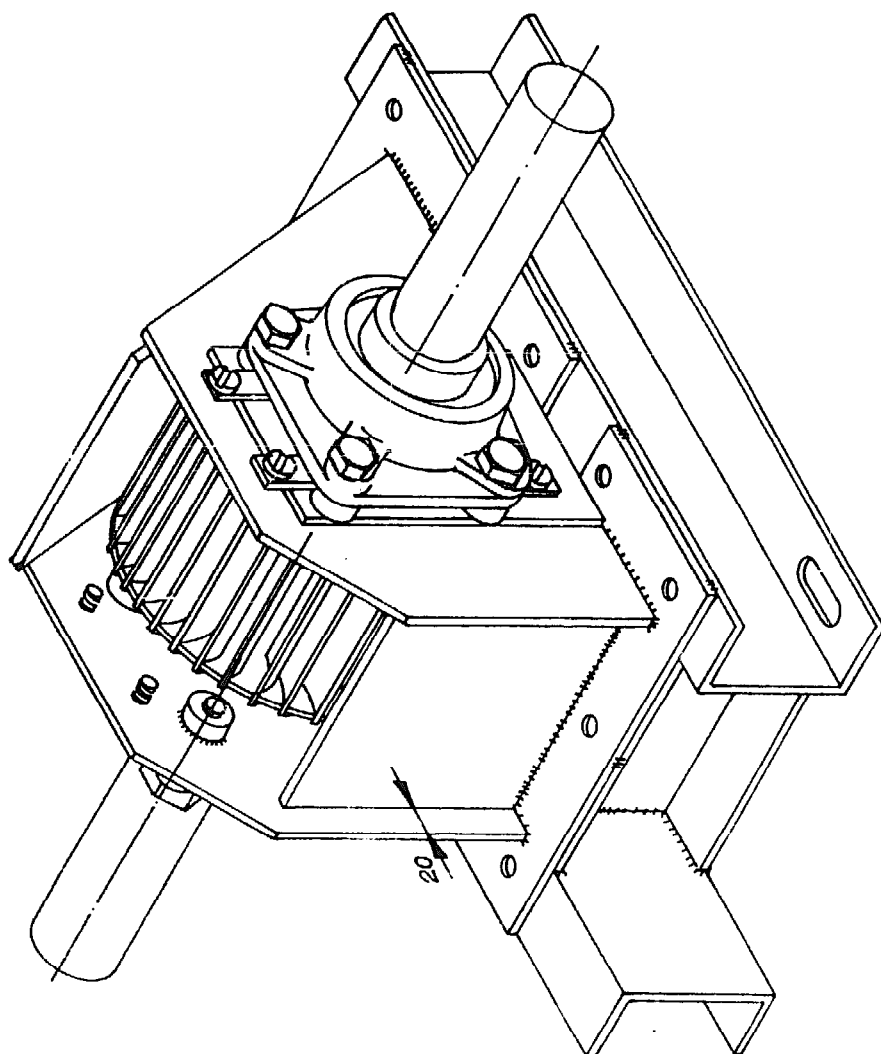


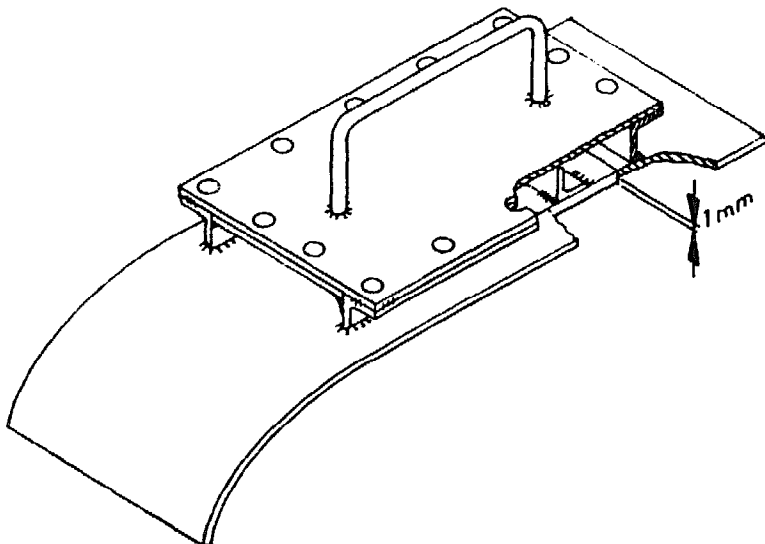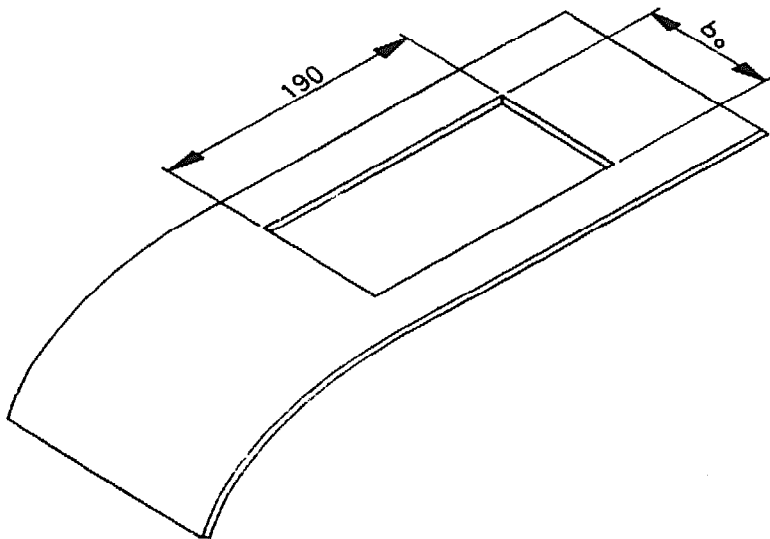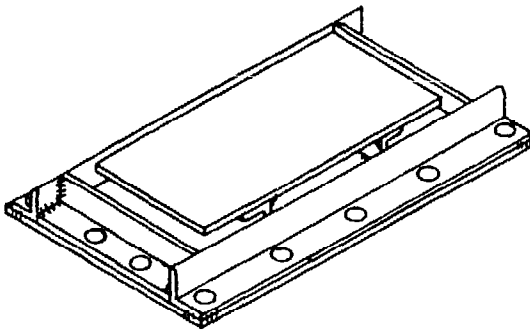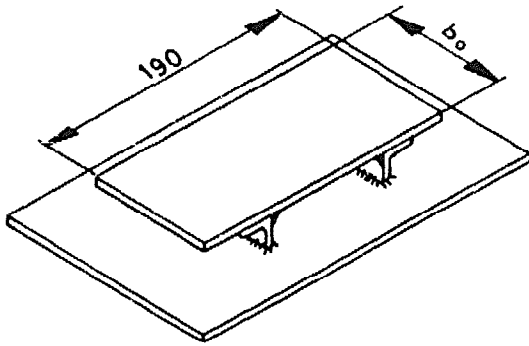


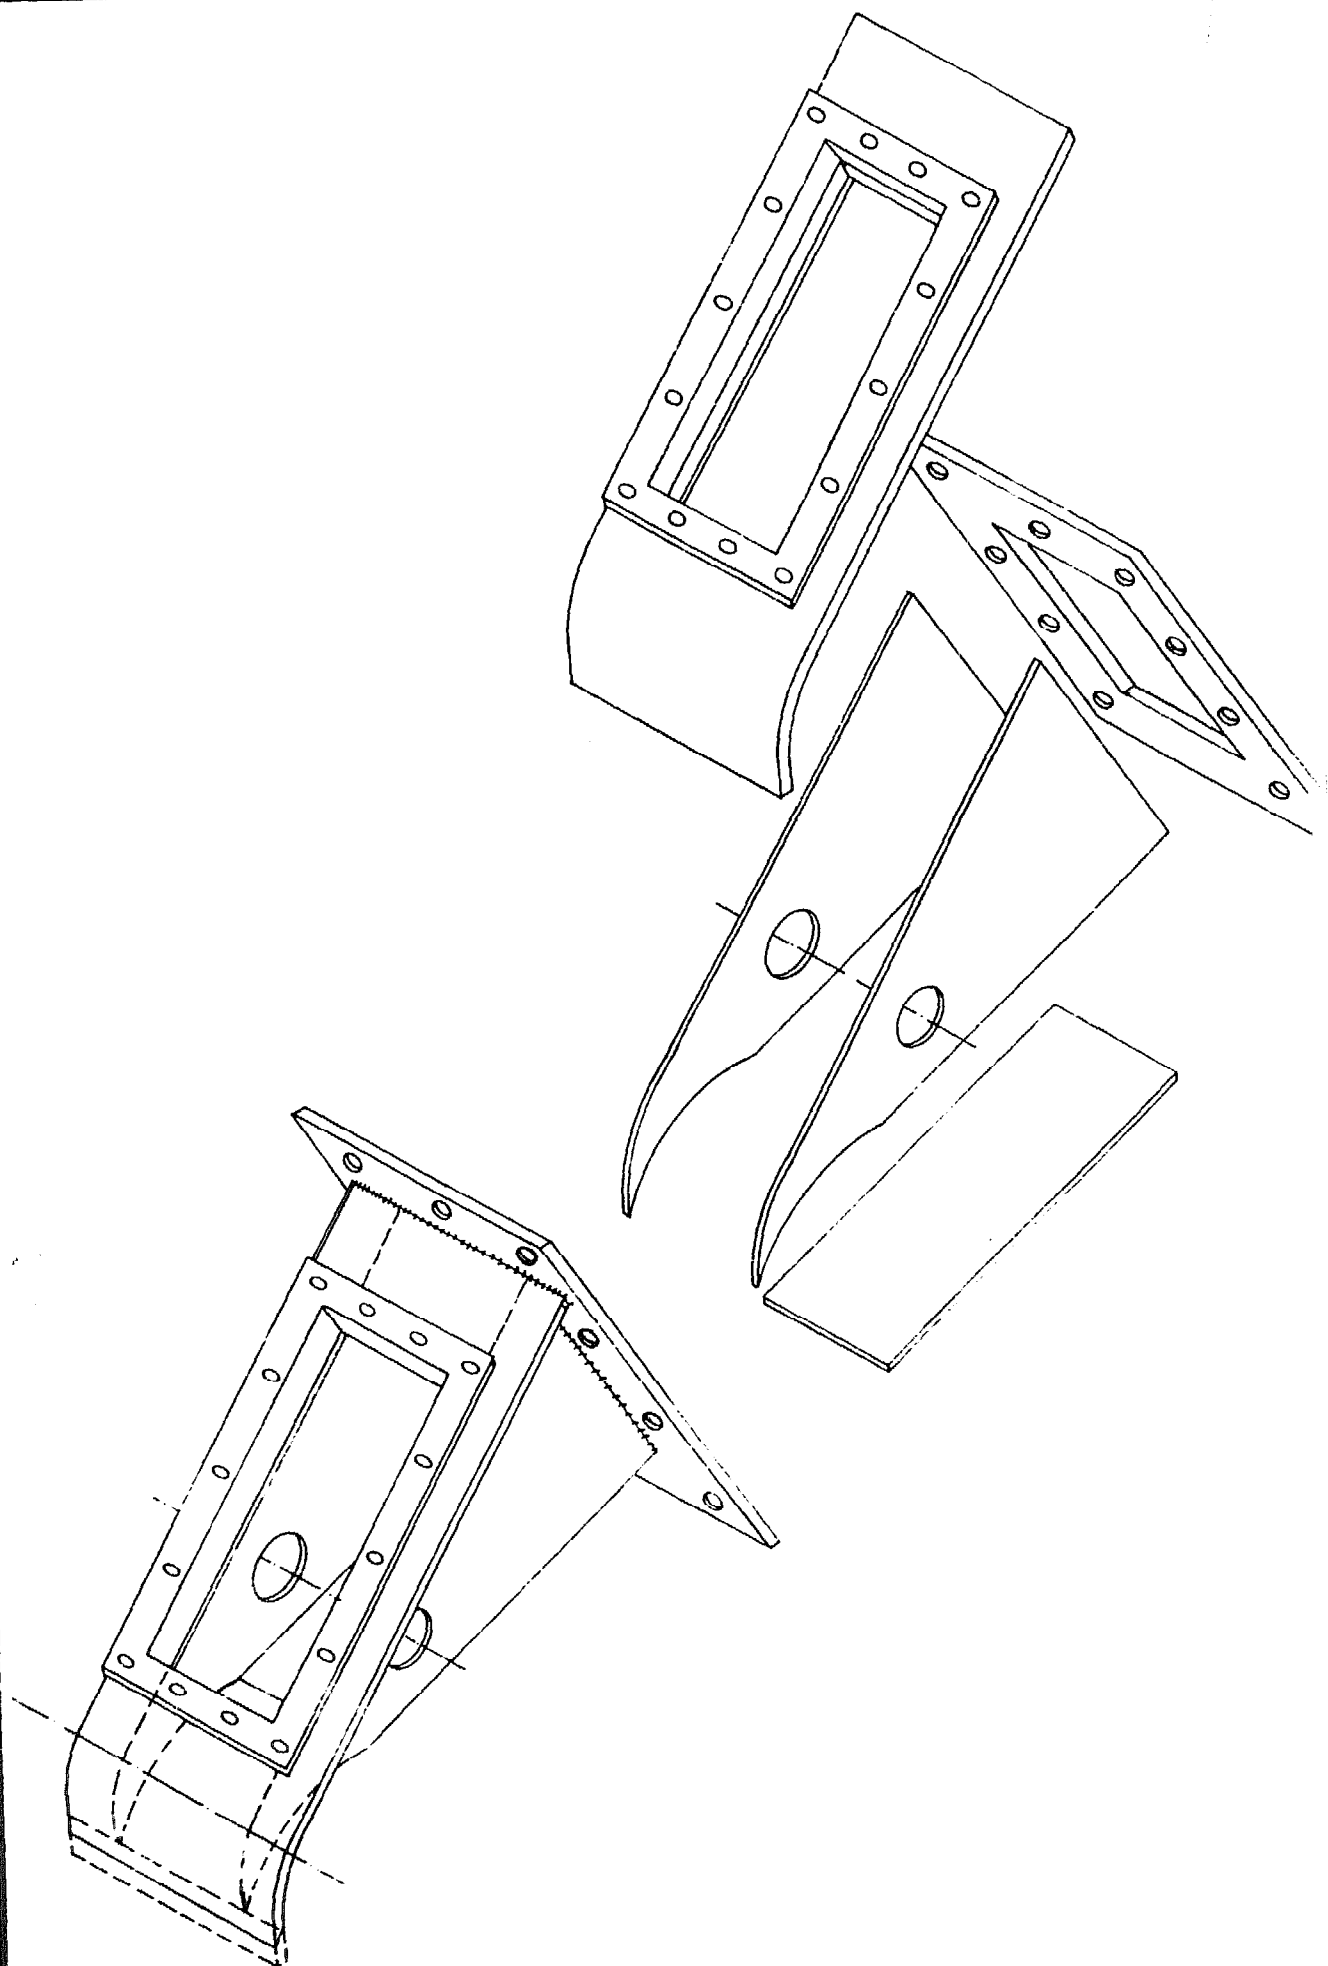

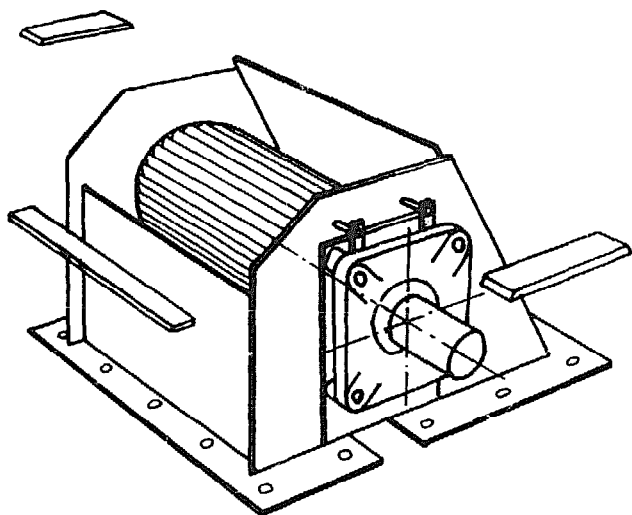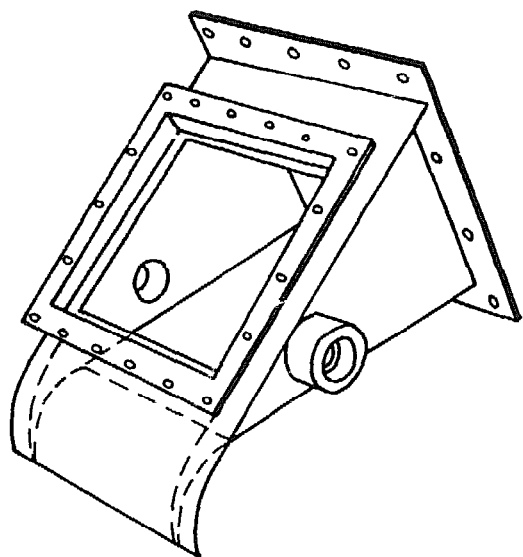


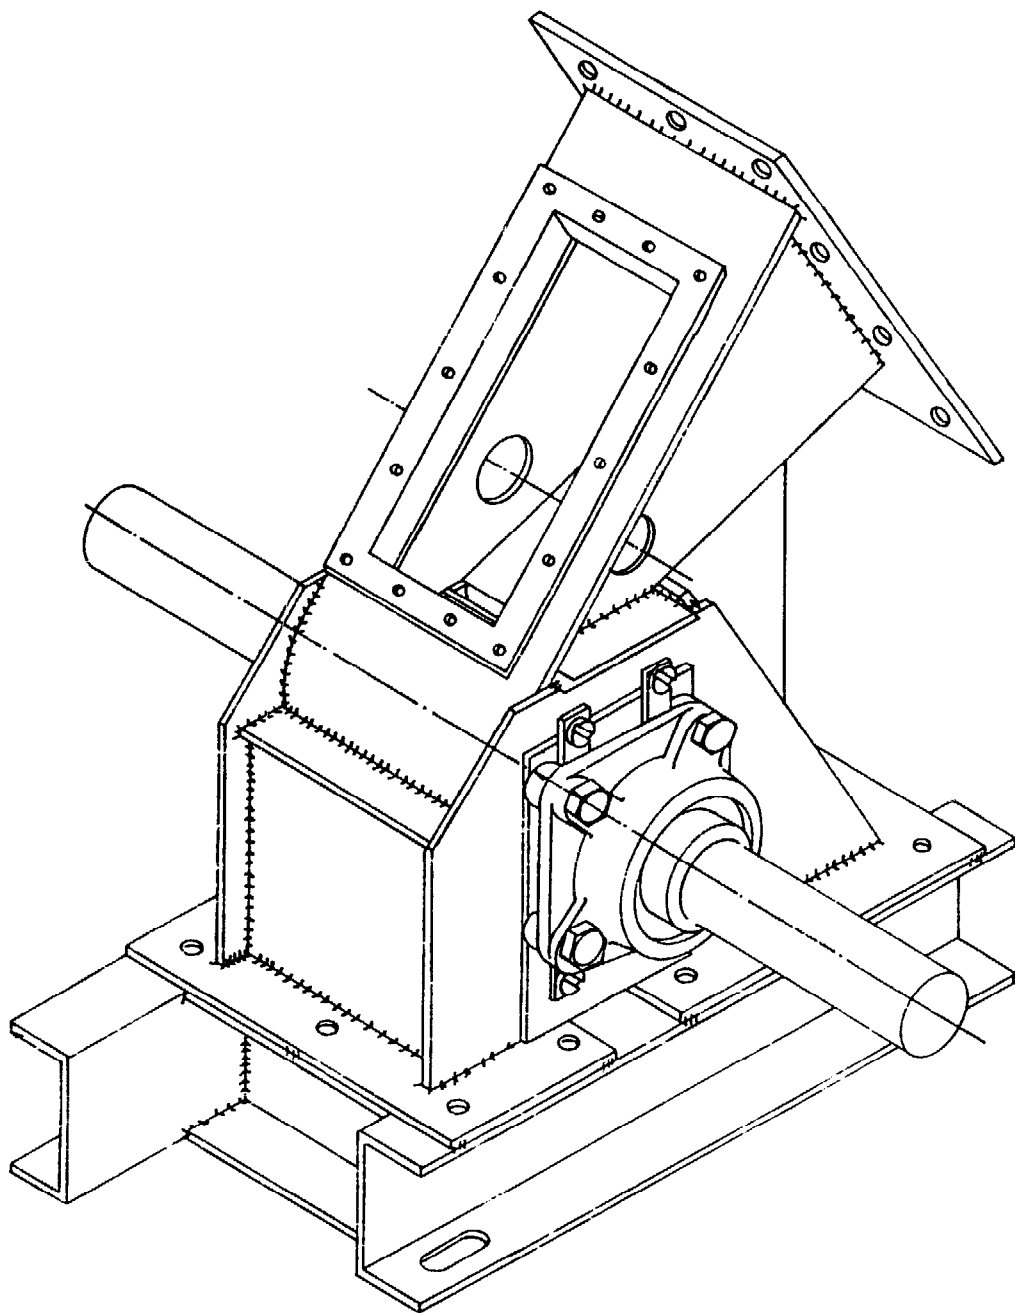

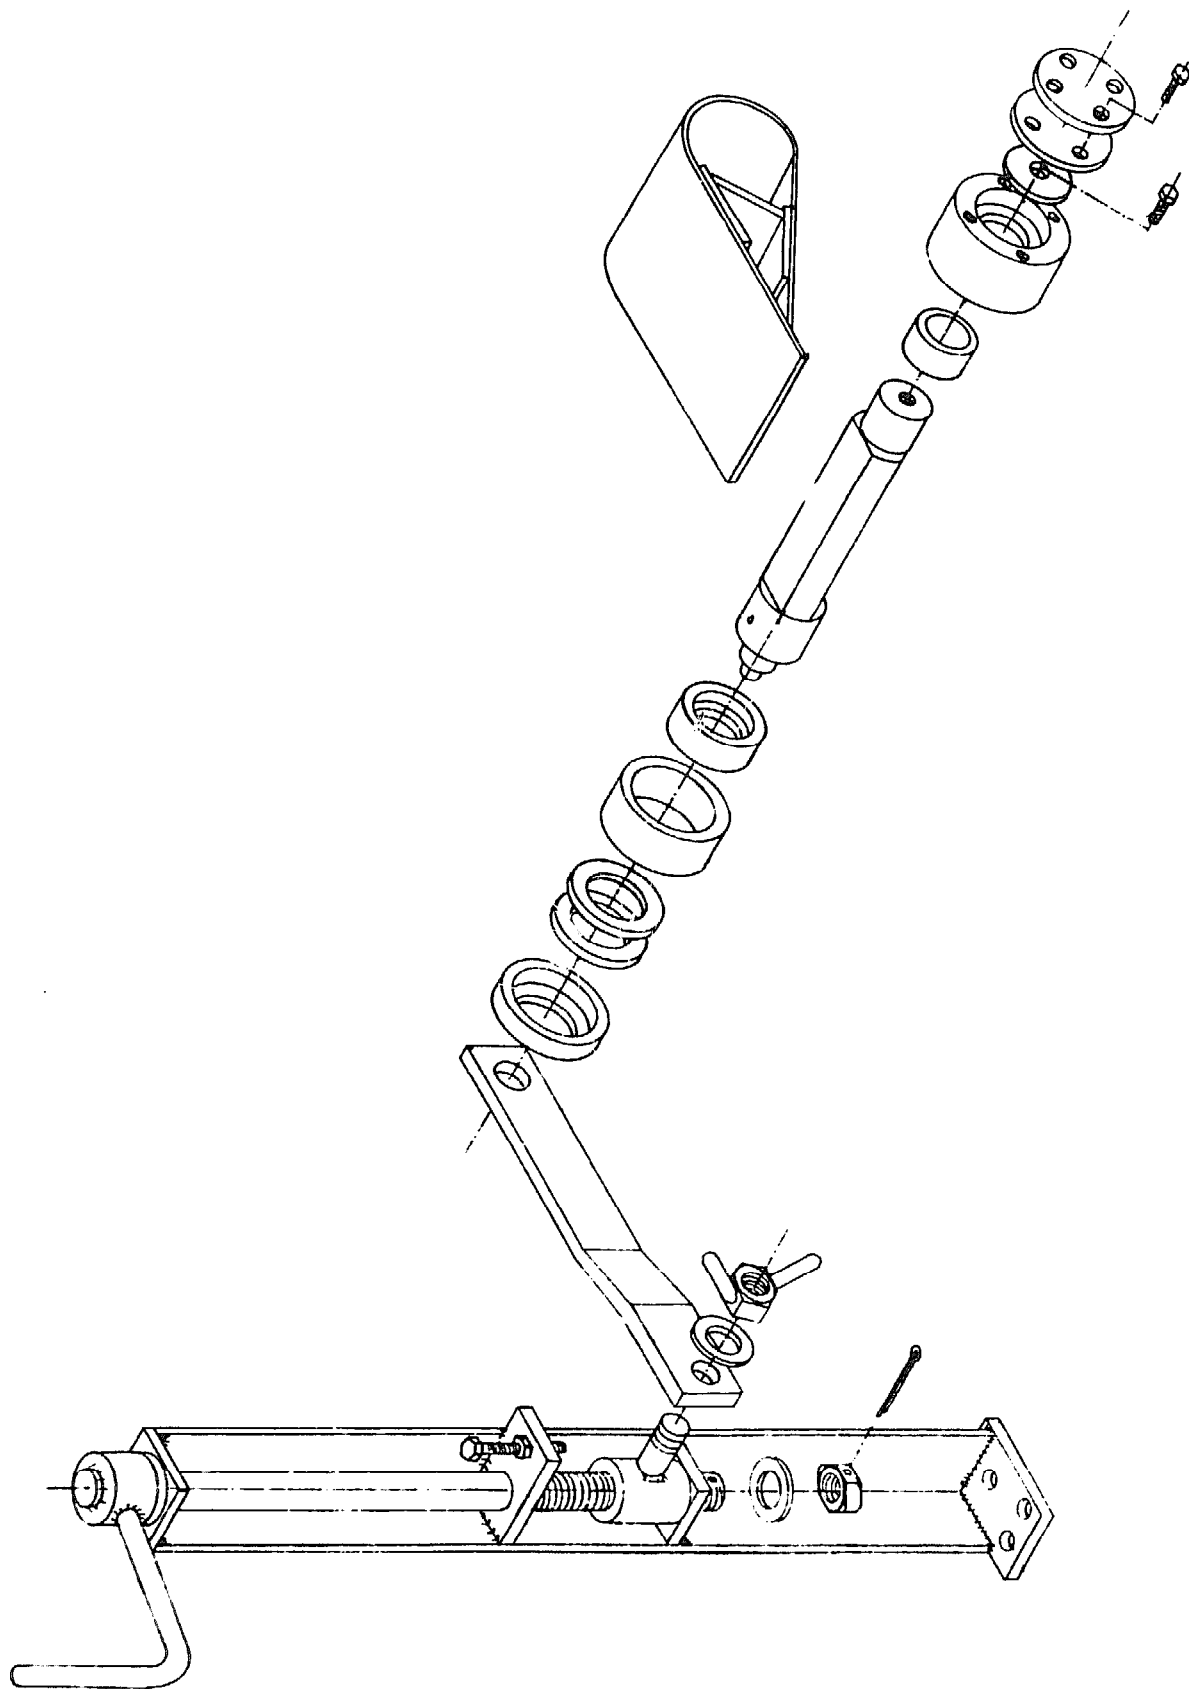


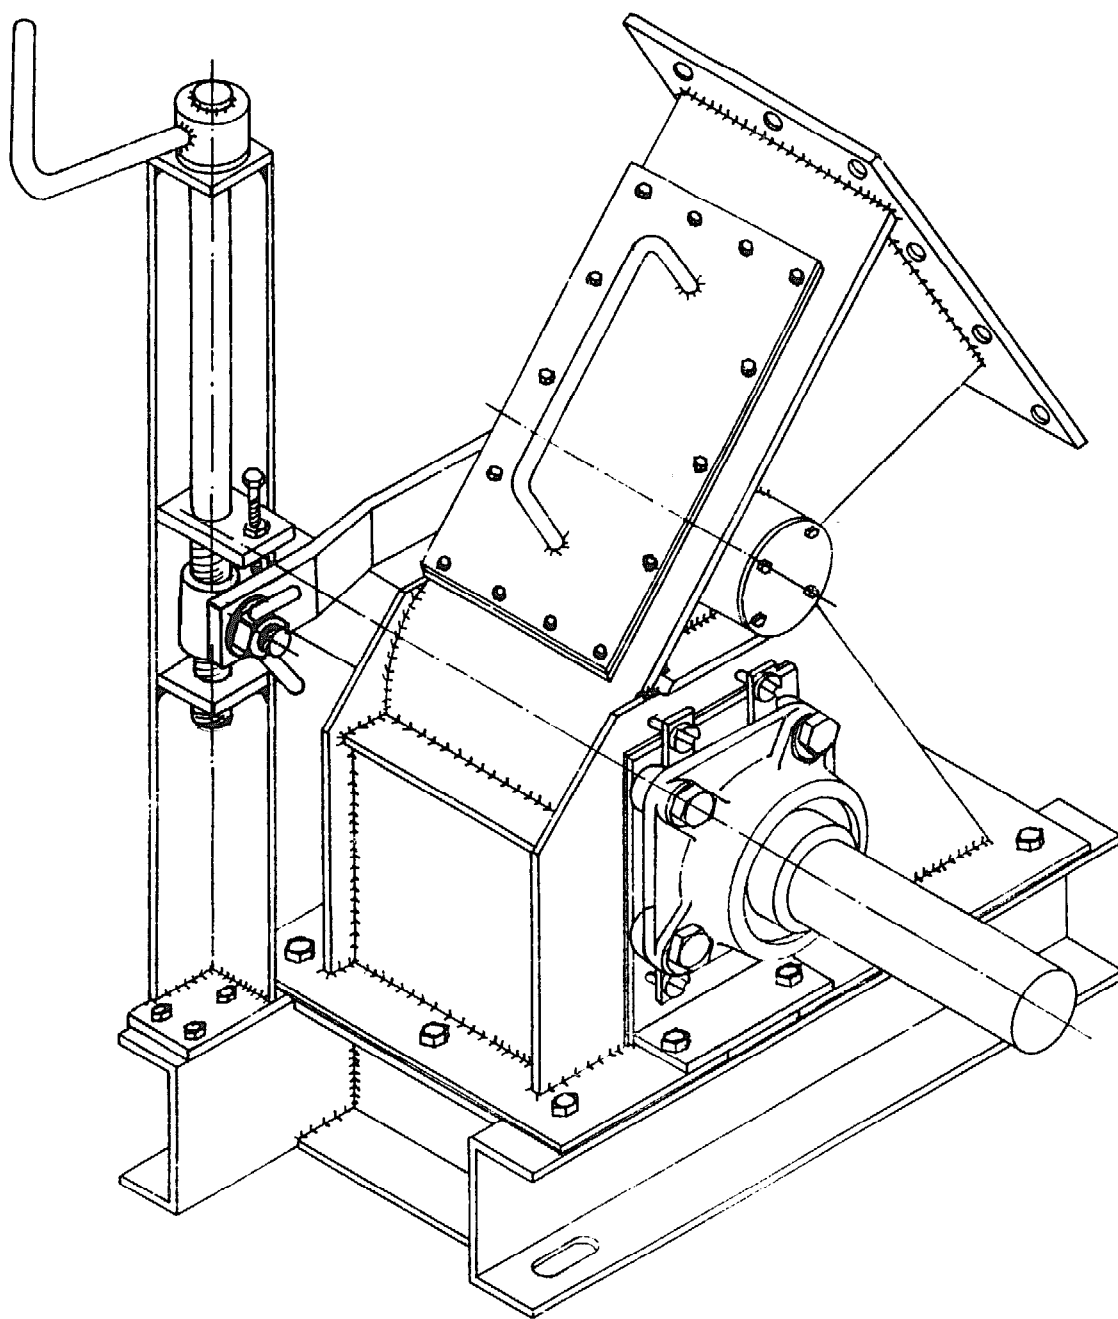


BLADE FABRICATION

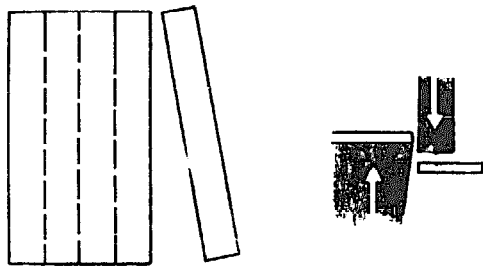


Take 2.5mm M.S. Sheet and shear it off according to required size.

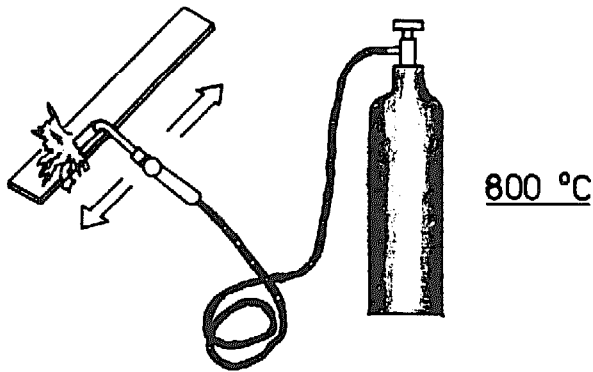


Heat the sheet up to 800 °C.

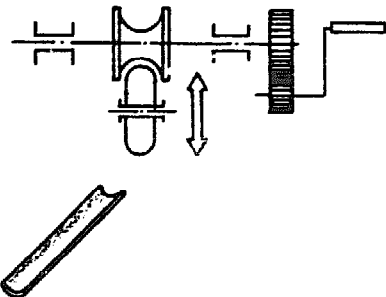


Roll it carefully.

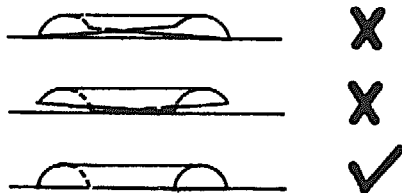

Check whether the blade is twisted. If so correct it.








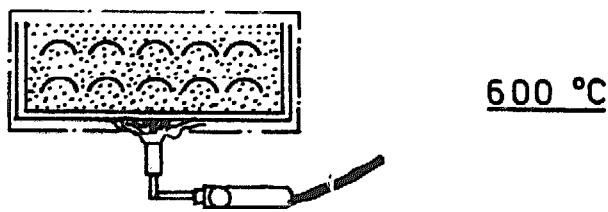


Pack the blades singly, as shown, in a metal box with cast iron chip stuffed all around them. Heat the box uniformly from all sides up to 600 °C. Let it cool in air by itself.

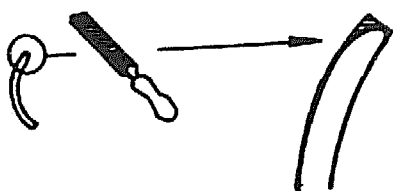


Make the edge profile by filing according to the drawing. Let the other end of the blade be as it is.


ROTOR DISC FABRICATION.

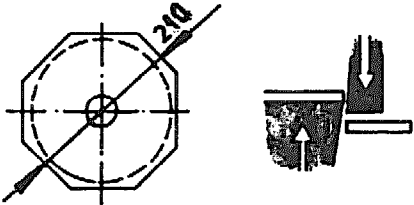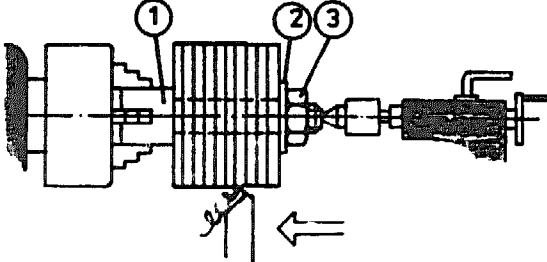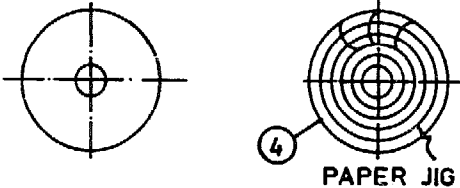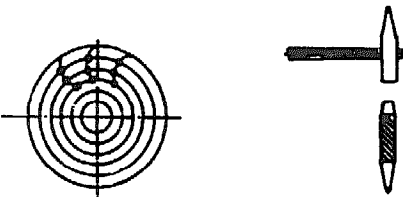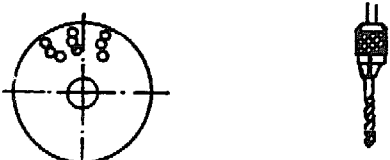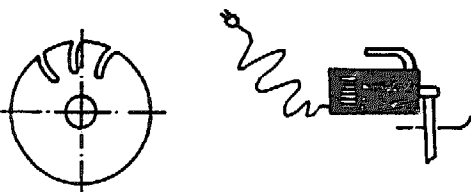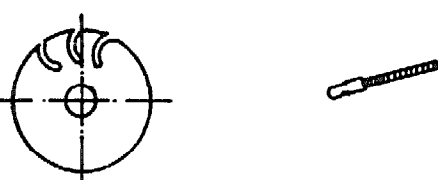	Prepare mild steel sheet according to measurements (4mm thick by 210 x 210). Mark centre and draw a circle of ϕ 205.
	Cut the four edges off by shearing. Bore a hole of ϕ 50.5 in the centre.
	Use disc holder to put together 10pcs. Mount it on Lathe as shown and turn to ϕ 205.
	Apply quick drying glue throughly on back side of the paper jig.Stick it on the disc.Make sure the paper jig coincides with disc.Press all over and let it dry.
	Centre punching.
	Drilling (ϕ 3).
	If necessary do soft annealing at Temperature of 600 °C. Make slots with sliting saw machine.
	Finish by filing. Atleast 2pcs at a time.


ROTOR FABRICATION.1

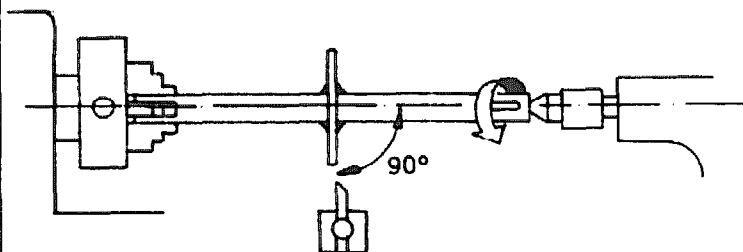


Place the middle disc in position. Do tack welding from both sides. Check the axis of the disc should be 90° to the axis of the shaft. Make full welding.

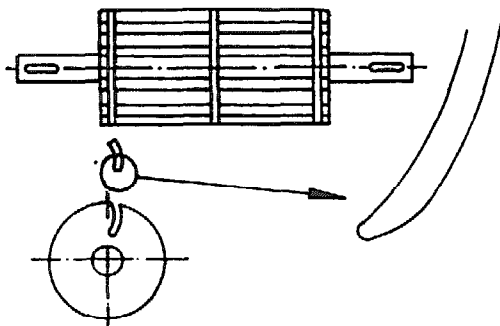



Place the outer discs in position. Insert the blades in the slots. Make sure that the filed edge profile falls inside.
(See drawing)

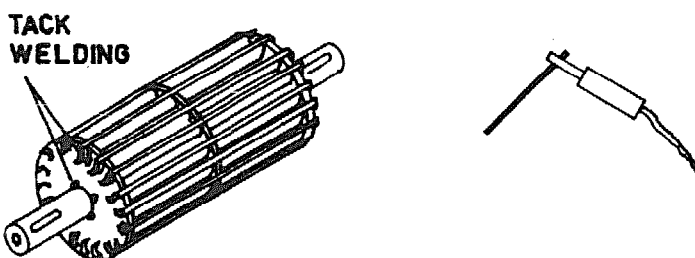

Do tack welding of the blades on the outer disc and outer disc on the rotor (as shown) from out side only.

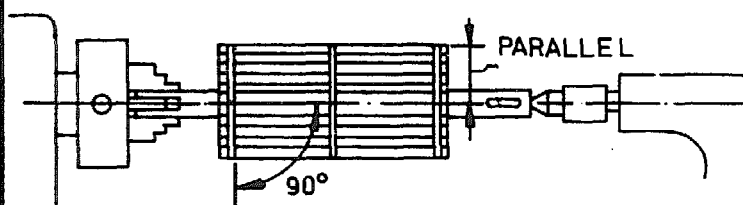


Mount it on lathe and check ;
a) Disc should be 90° to the axis of the rotor.
b) The blade should be parallel to the axis of the rotor.

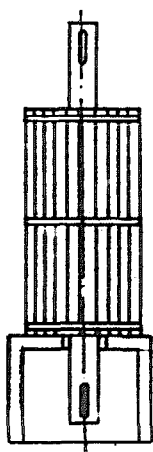


If it is alright place the rotor vertically up (as shown) on a drum or a specially made table with a hole big enough to put the shaft end through. Continue welding from out side only and alternately (as shown)


ROTOR FABRICATION.2

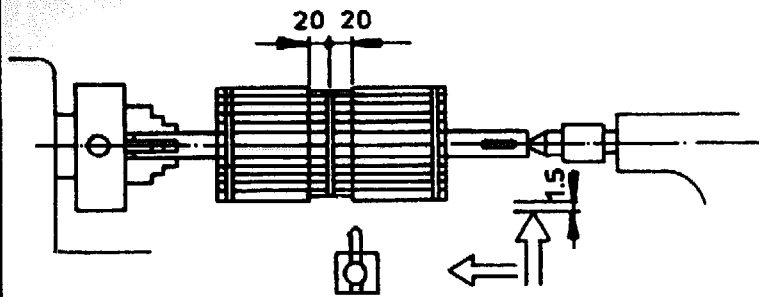


Turn eachside up to 20 mm from the middle disc to ϕ 202. Remove burr which may bostruct welding rod.

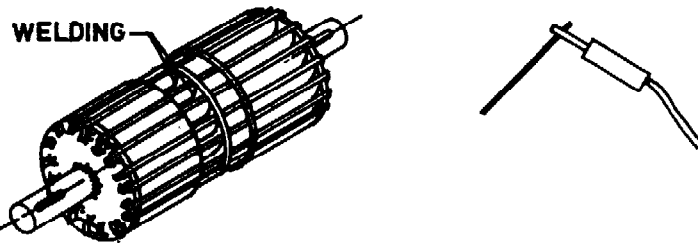


Make full welding on the middle disc alternatively opposite side of the disc.

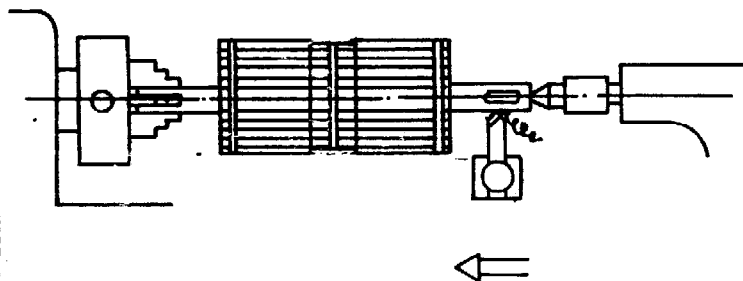

Turn the rotor shaft to ϕ 50

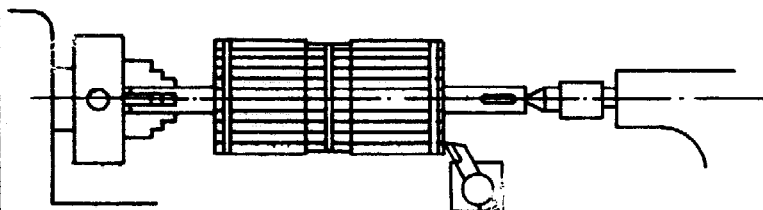

Facing off

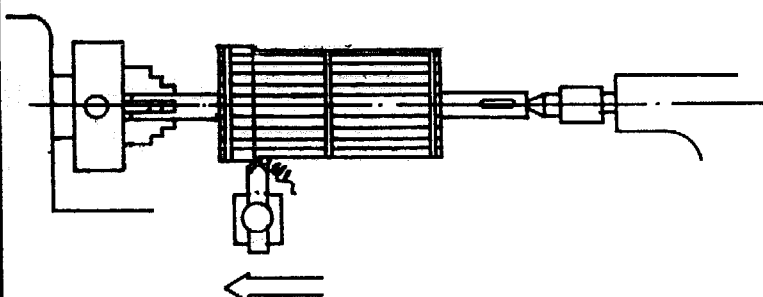





Turn the rotor shaft to final ϕ of 200.
Turn the rotor shaft 180° to carry on turning and facing of the other side.
Remove burr from rotor blade edges.


POS	PCS	DENOMINATION	DRAWING NUMBER	SPECIFICATION	REMARK
1	1	BASE FRAME	T3/01/00	M.S.CHANNEL 100X50	ASSEMBLY
2		GASKET	T3/02/00	RUBBER 6MM	
3	1	ROTOR HOUSING ASSEMBLY	T3/03/00		
4	1	RIB	T3/04/00	M.S.SHEET 5MM	ASSEMBLY
5	2	BRACING PLATE	T3/05/00	M.S.FLAT 38X6	
6	1	INLET	T3/06/00		
7	1	INLET GASKET	T3/07/00	RUBBER 6MM	ASSEMBLY
8	1	ROTOR	T3/08/00		
9	2	ROTOR BEARING	T3/09/00		
10	2	STUFFING BOX	T3/10/00		ASSEMBLY
11	8	SPACER	T3/11/00	M.S.ROD $\phi 25(1")$	
12	2	PRESS RING	T3/12/00		
13	2	STUFFING PLATE GASKET	T3/13/00	RUBBER	ASSEMBLY
14	2	SEALING PLATE	T3/14/00	M.S.SEET 3MM	
15	2	SEALING PAD	T3/15/00	RUBBER 6MM	
16	1	BUTTERFLY VALVE SHAFT	T3/16/00	M.S.ROD $\phi 50(2")$	ASSEMBLY
17	1	CUP BUSH	T3/17/00	M.S.ROD $\phi 64(2 1/2")$	
18	2	SEALING RING	T3/18/00	RUBBER 6MM	
19	1	PIVOTAL BUSH '1'	T3/19/00	BRASS ROD $\phi 50(2")$	ASSEMBLY
20	1	BUSH CASING '1'	T3/20/00	M.S.ROD $\phi 64(2 1/2")$	
21	1	BUSH CASING '2'	T3/21/00	M.S.ROD $\phi 64(2 1/2")$	
22	1	PIVOTAL BUSH '2'	T3/22/00	BRASS ROD $\phi 38(1 1/2")$	ASSEMBLY
23	1	GASKET	T3/23/00	RUBBER 2MM	
24	1	COVER	T3/24/00	M.S.SHEET 3MM	
25	1	WASHER	T3/25/00		ASSEMBLY
26	1	LEVER	T3/26/00	M.S.FLAT 38X10	
27	1	LOCK NUT	T3/27/00	M.S.ROD $\phi 38(1 1/2")$ $\phi 16(3/4")$	
28	1	SPINDLE	T3/28/00	M.S.ROD $\phi 20(1")$	ASSEMBLY
29	1	STAND ASSEMBLY	T3/29/00		
30	1	HANDLE	T3/30/00	M.S.ROD $\phi 15(5/8")$	
31	1	KNOB	T3/31/00	M.S.ROD $\phi 38(1 1/2")$	ASSEMBLY
32	1	BUSH	T3/32/00	BRASS ROD $\phi 38(1 1/2")$	
33	2	WASHER	T3/33/00		
34	1	COTTER PIN	T3/34/00		ASSEMBLY
35	1	BUTTER FLY VALVE	T3/35/00		
36	1	WING NUT	T3/36/00	M16	
37	8	WASHER	T3/37/00		ASSEMBLY
38	8	HEX.BOLT	T3/38/00	M14	
39		HEX.BOLT	T3/39/00	M12	
40		HEX.NUT	T3/40/00	M12	ASSEMBLY
41	1	HEX.BOLT	T3/41/00	M8	
42	4	HEX.BOLT	T3/42/00	M6	
43	8	HEX.BOLT	T3/43/00	M6	ASSEMBLY
44	8	HEX.NUT	T3/44/00	M6	
45		HEX.BOLT	T3/45/00	M6	
46		HEX.NUT	T3/46/00	M6	ASSEMBLY
47		HEX.BOLT	T3/47/00	M6	
48		HEX.NUT	T3/48/00	M6	
49		HEX.BOLT	T3/49/00	M6	ASSEMBLY
50		HEX.NUT	T3/50/00	M6	
51		HEX.NUT	T3/51/00	M16	
52	1	ADAPTER	T3/52/00		ASSEMBLY

C.F.TURBINE TYPE 3

T3/00/00 S01

PART LIST

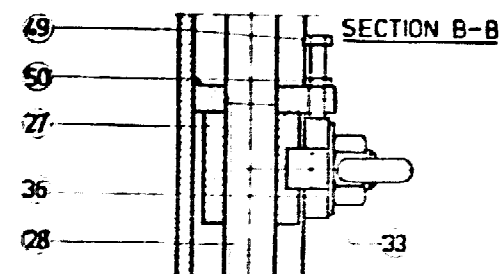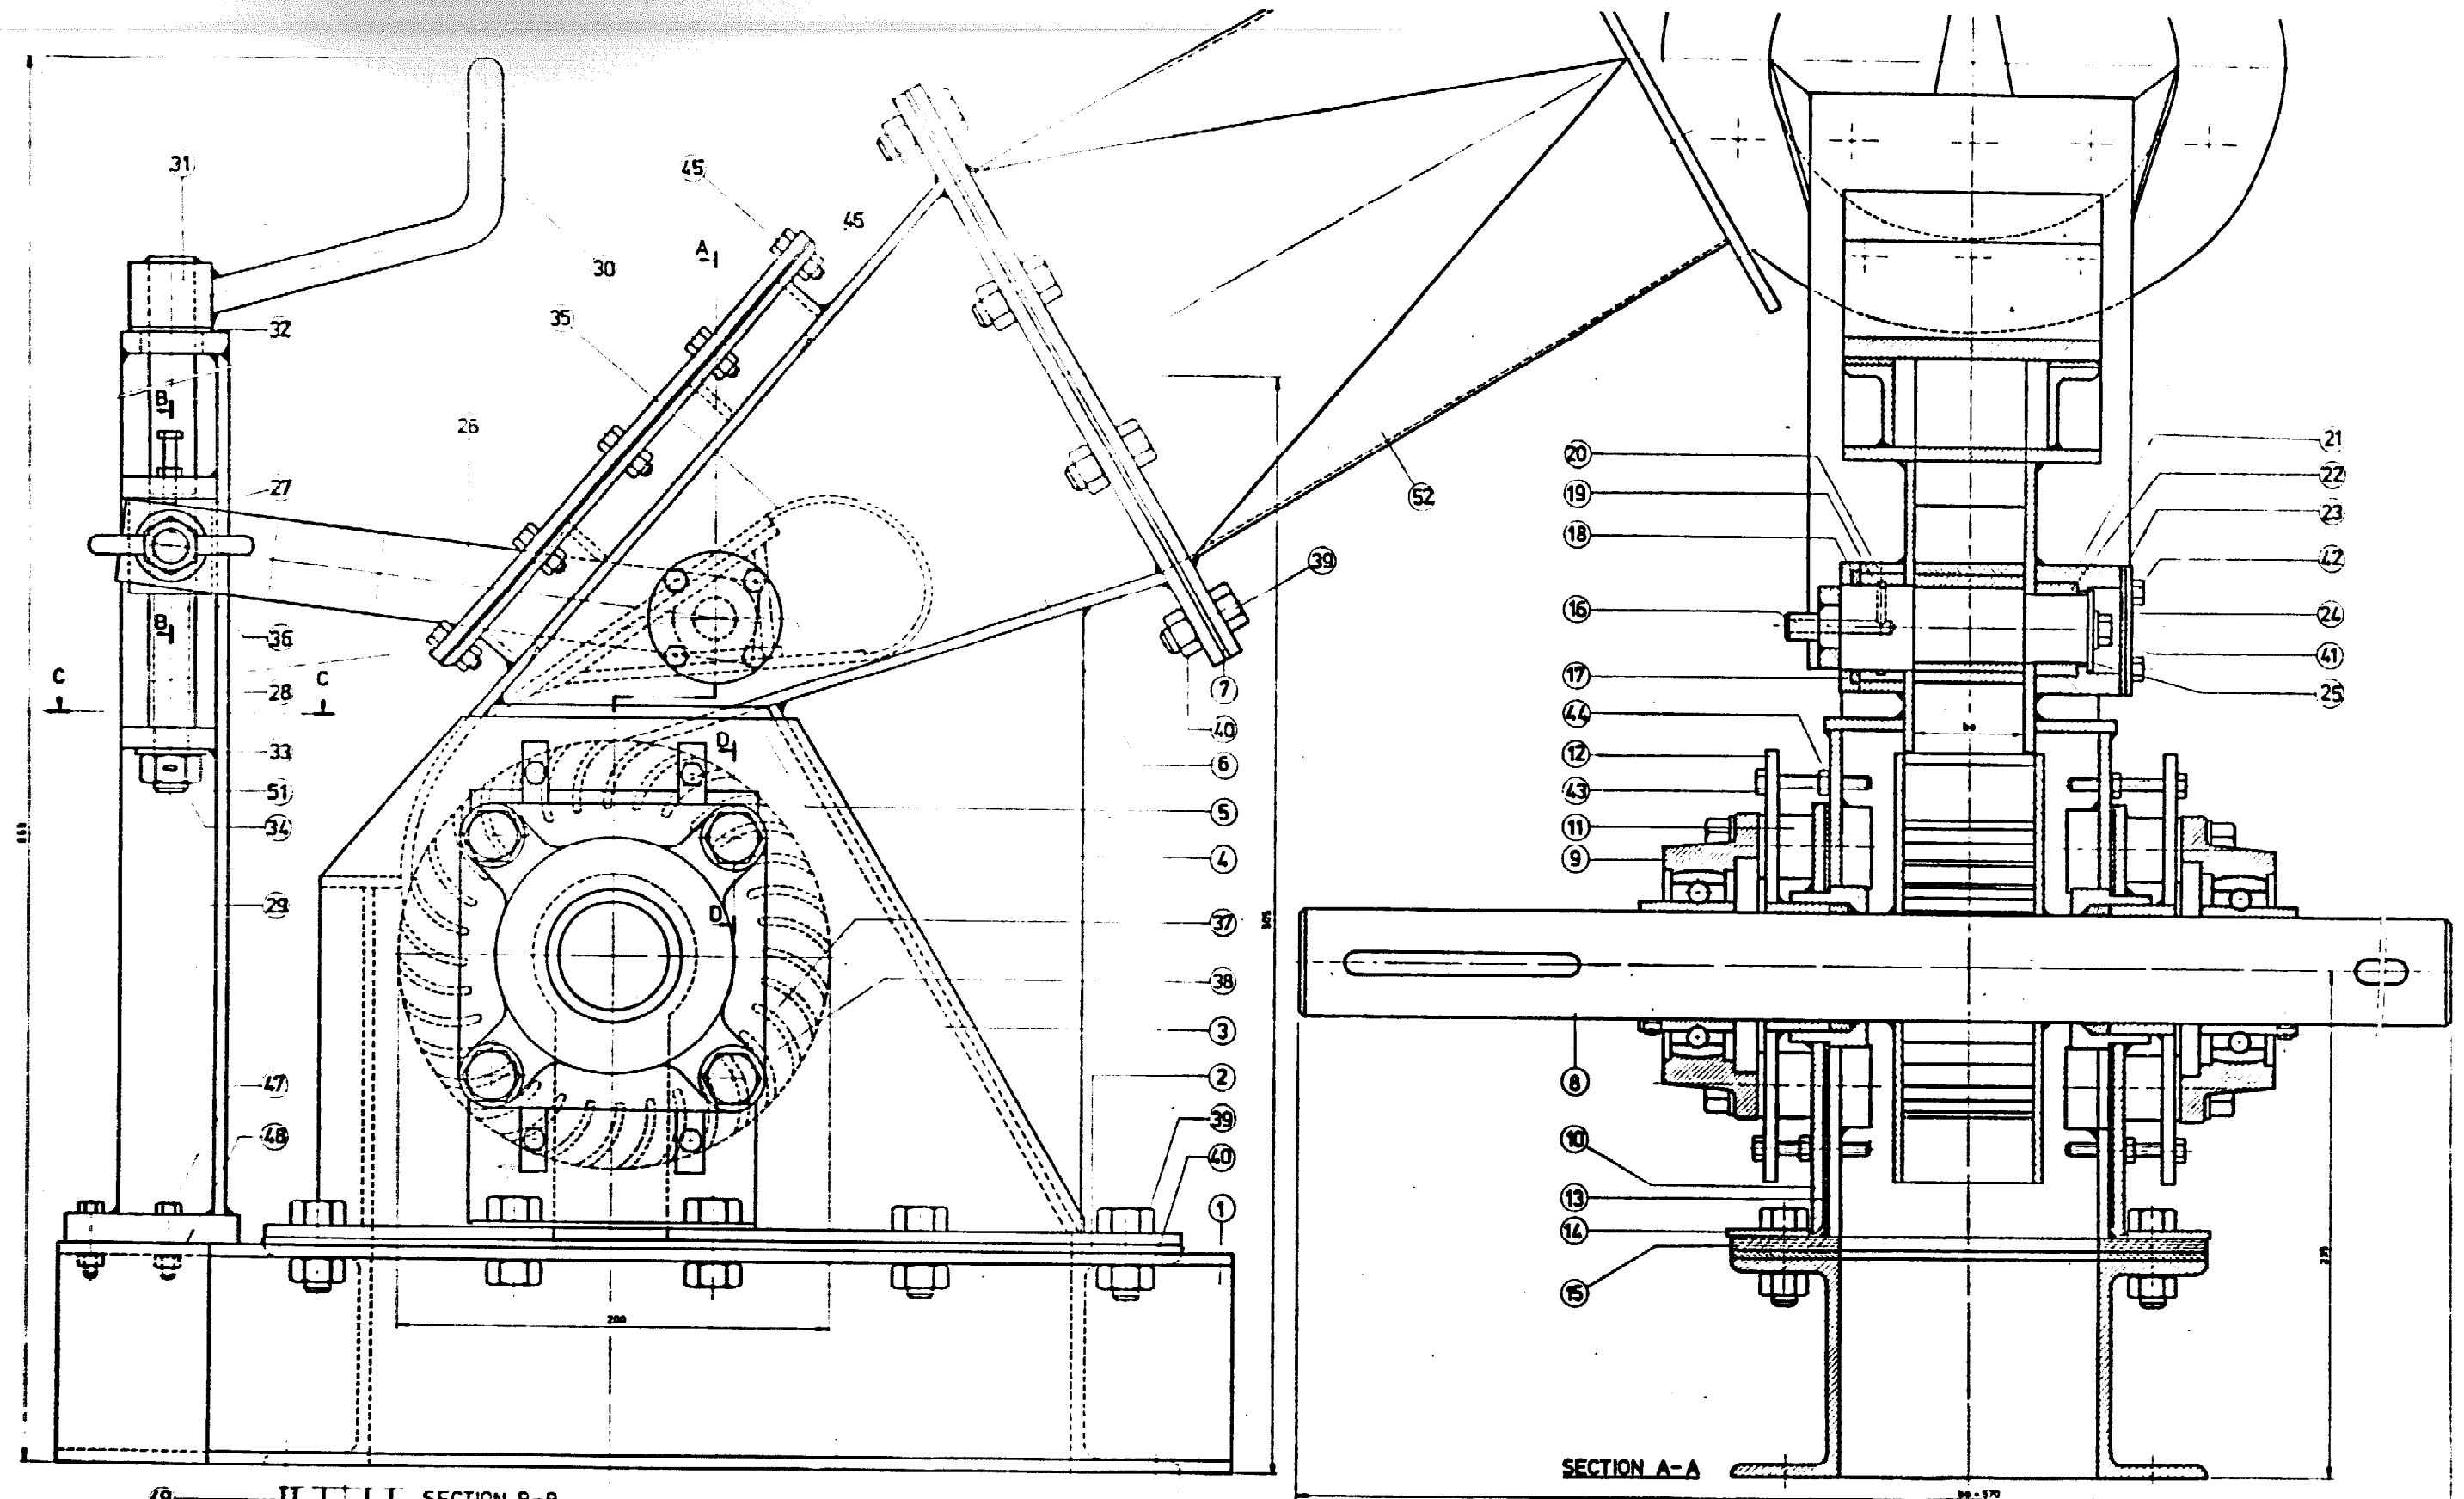

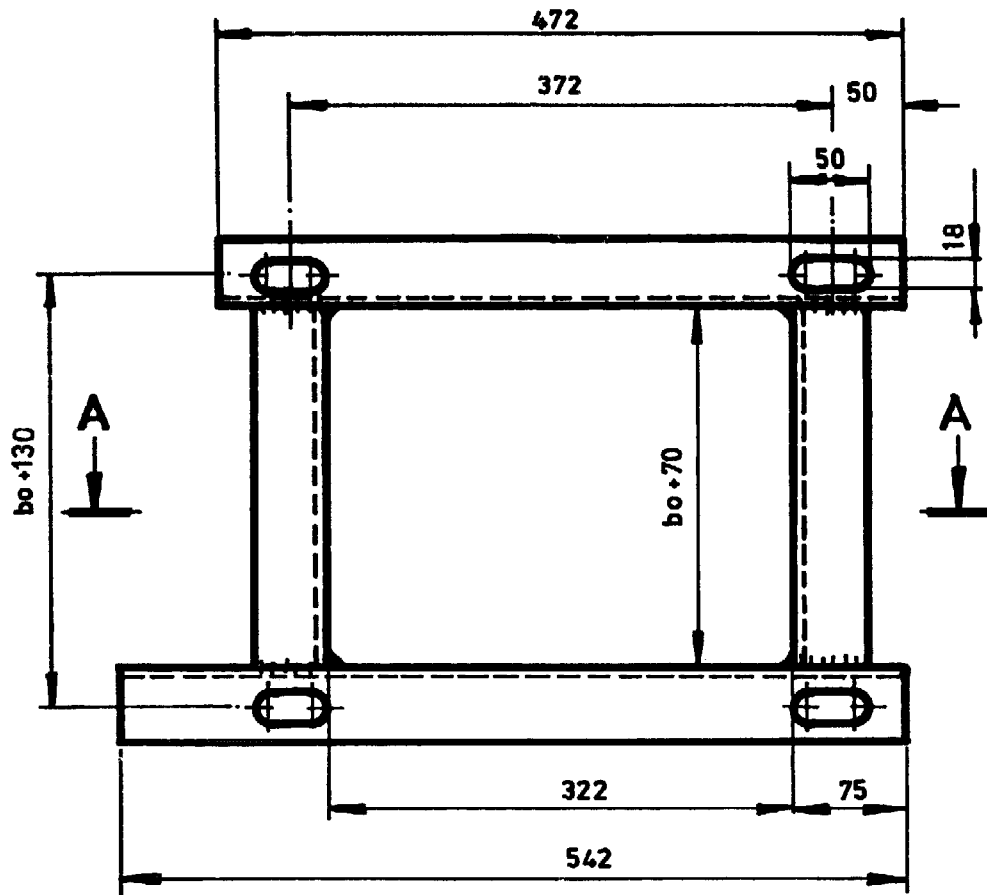

A-A




M.S.CHANNEL 100 X 50

1.PC

BASE FRAME


T3/01/00 S02

1:5

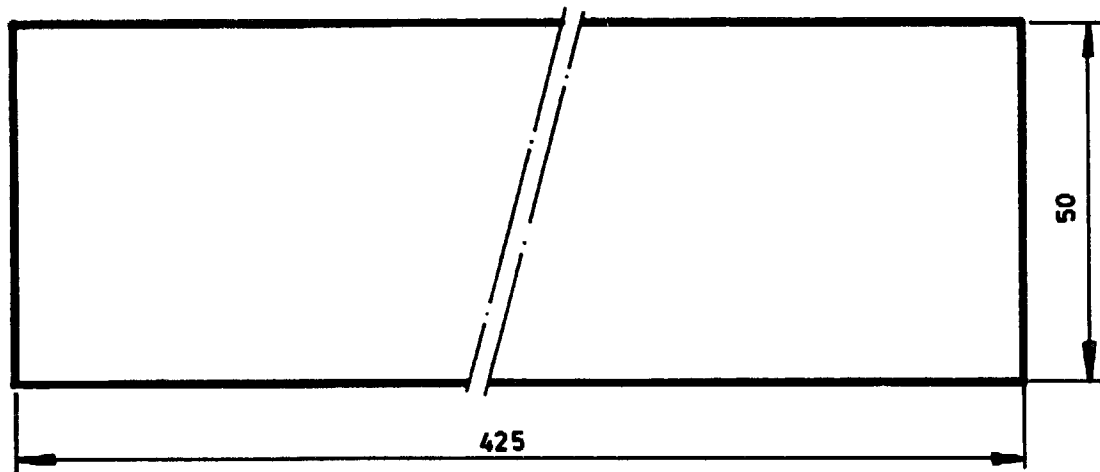

RUBBER 6MM

2.PCS


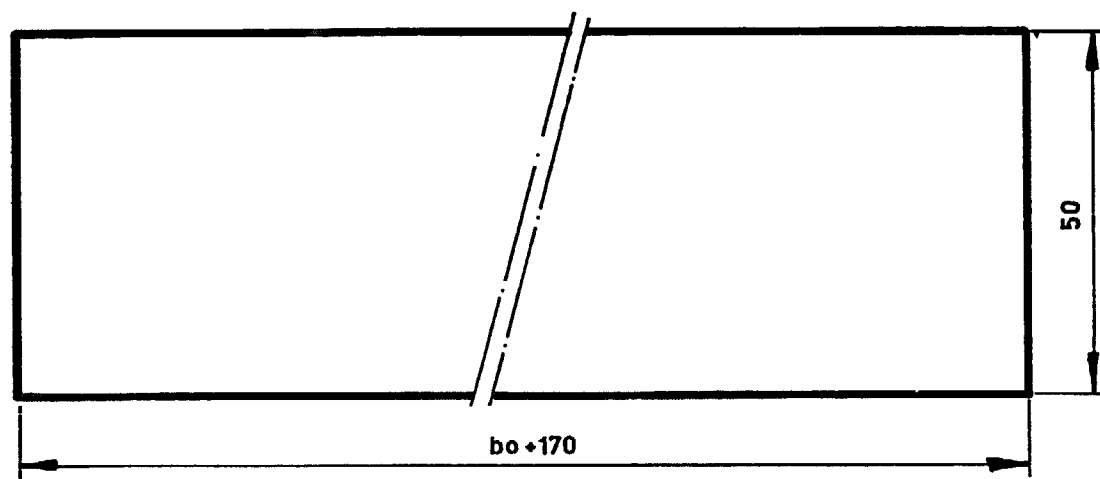


RUBBER 6MM

2.PCS

1	2	SIDE PLATE	T3/03/01	M.S.PLATE 5MMX253X235
2	1	BAFFLE PLATE	T3/03/02	M.S.PLATE 5MMX284Xbo+70
3	1	SPACER PLATE	T3/03/03	MS.FLAT 30X6 Xbo+70
4	1	REAR BAFFLE PLATE	T3/03/04	M.S.PLATE 5MM X155Xbo+70
5	1	HOUSING BASE FRONT	T3/03/05	M.S.FLAT 50X6 Xbo+542
6	1	HOUSING BASE REAR	T3/03/06	M.S.FLAT 50X6 Xbo+338
7	8	THREAD STUB	T3/03/07	M.S.ROD ϕ 25X15

ROTOR HOUSING ASSEMBLY T3/03/00 S04
 PART LIST

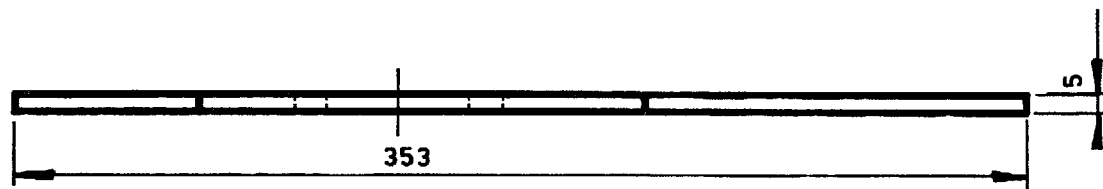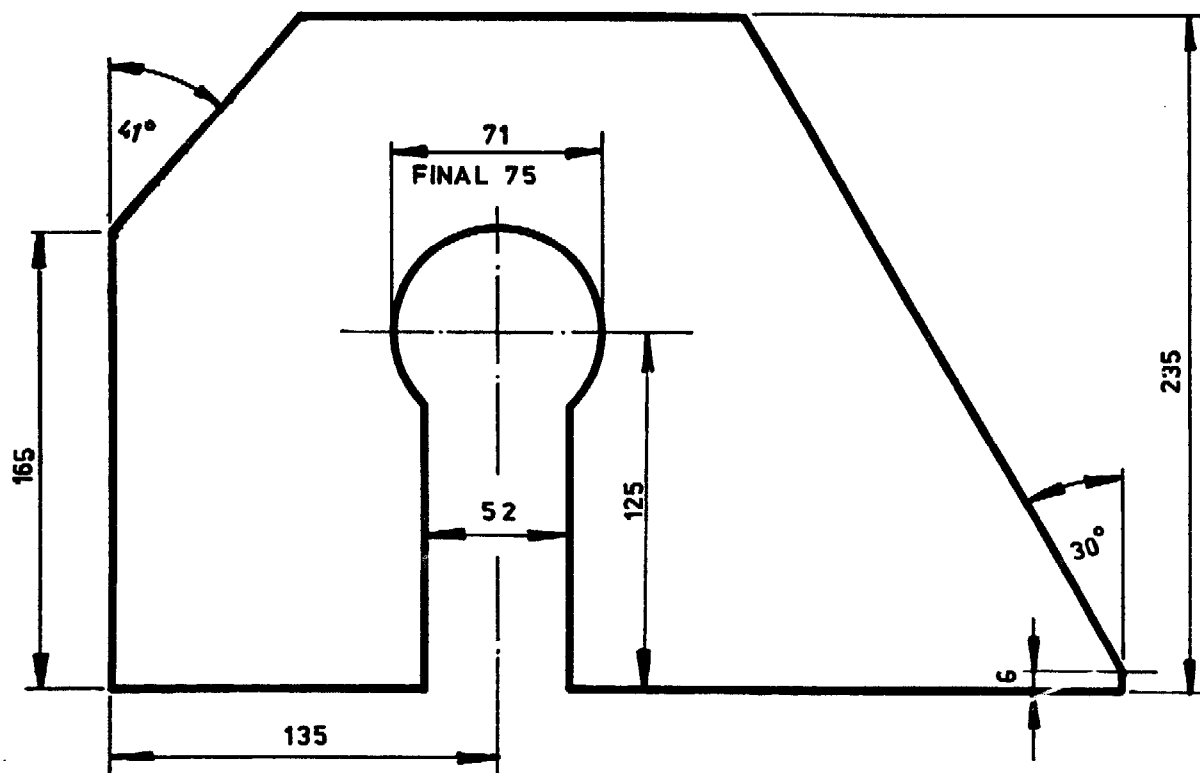

M.S.PLATE


2.PCS

SIDE PLATE

T3/03/01

S06

1:2.5

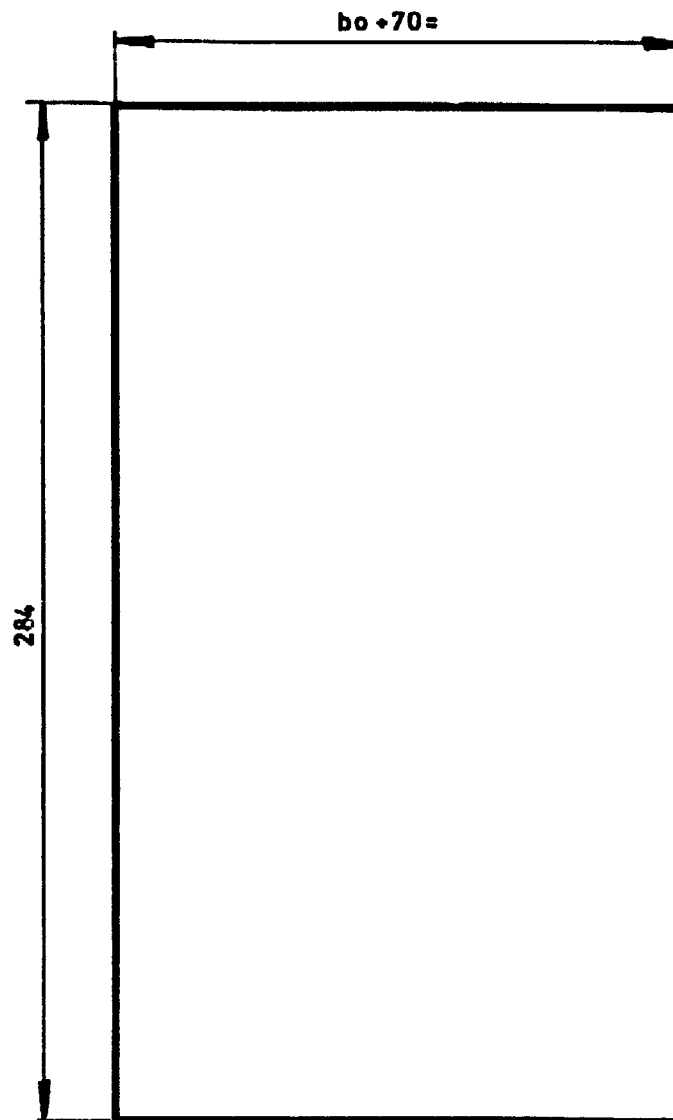


M.S. PLATE 5 MM

1PC

Rev
BAFFLE PLATE

T3/03/02

S07

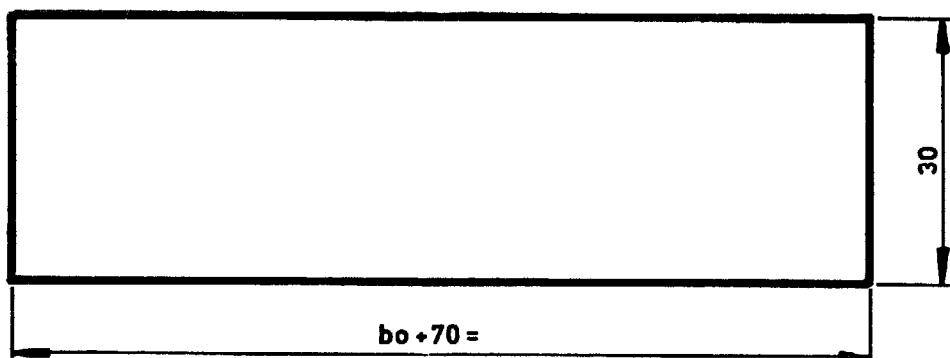


M.S.PLATE 6MM

1PC

d.2.12
SPACER PLATE

T3/03/03 S08

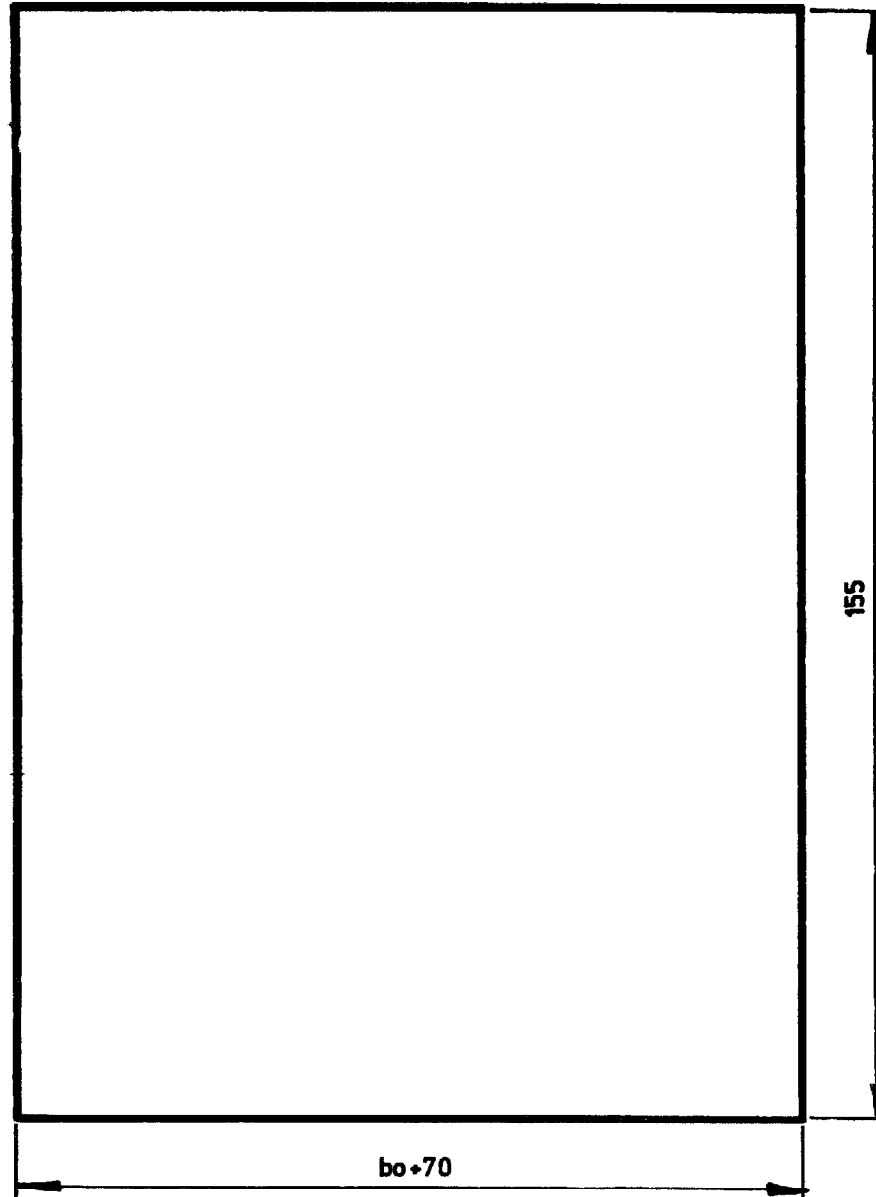

MS.PLATE 5MM


1.PC

REAR BAFFLE PLATE

T3/03/04 S09

HOUSING BASE FRONT

T3/03/05 | S10

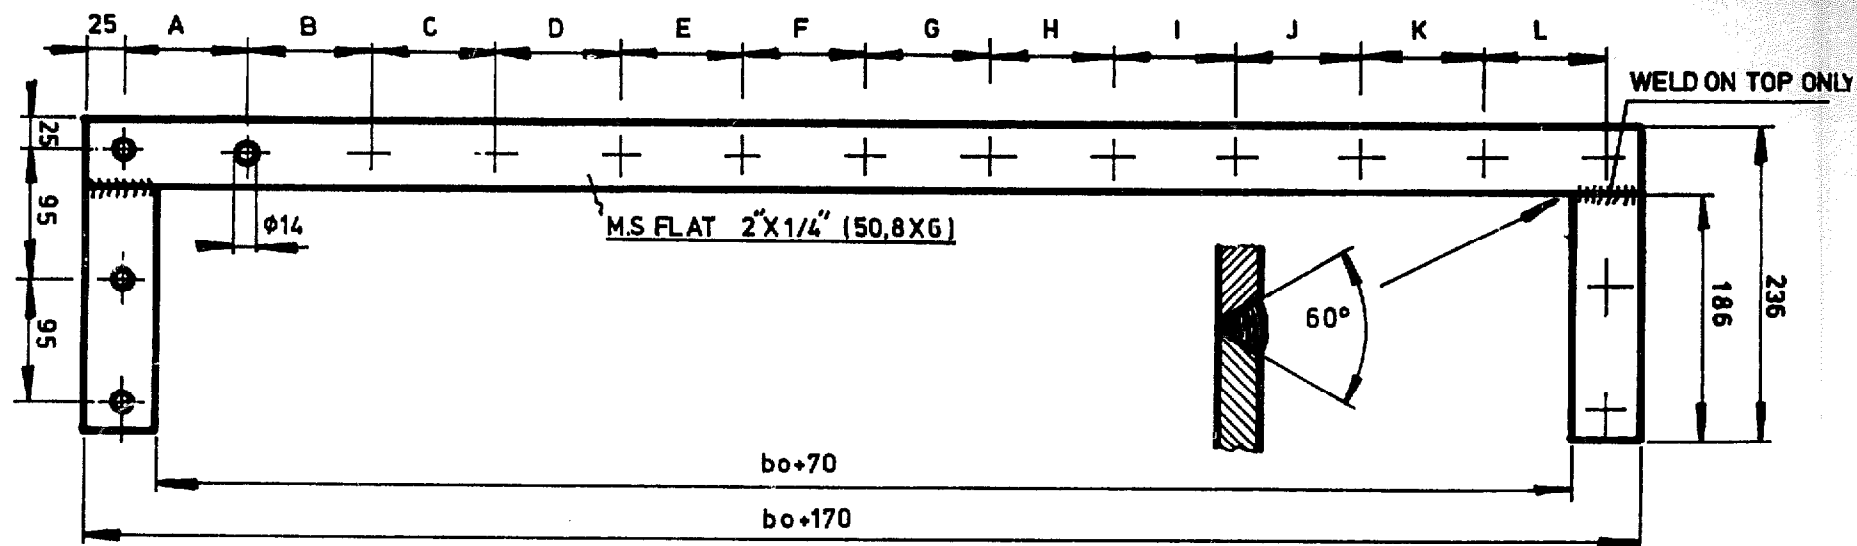
[illegible]

DRILL HOLES TOGETHER
WITH BASE FRAME


4.1.12

HOUSING BASE REAR



T3/03/06 S11

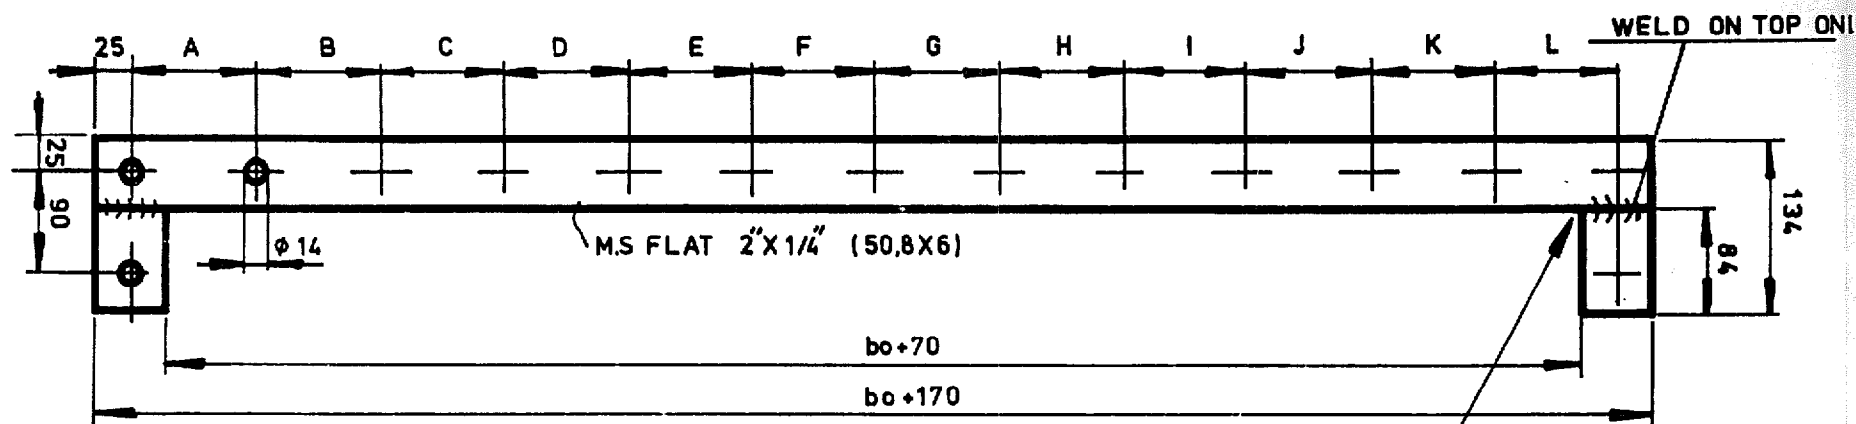

	A	B	C	D	E	F	G	H	I	J	K	L
bo 50	85	85										
bo 70	95	95										
bo 90	105	105										
bo 120	80	80	80									
bo 160	93	94	93									
bo 220	85	85	85	85								
bo 290	82	82	82	82	82							
bo 390	85	85	85	85	85	85						
bo 520	80	80	80	80	80	80	80	80				
bo 690	81	81	81	81	81	81	81	81	81	81		
bo 920	86	86	87	87	87	87	87	87	87	87	86	86



DRILL HOLE TOGETHER WITH BASE FRAME



M.S. ROD ϕ 1"


8.PCS

THREAD STUB

1:1


T3/03/07

S 12

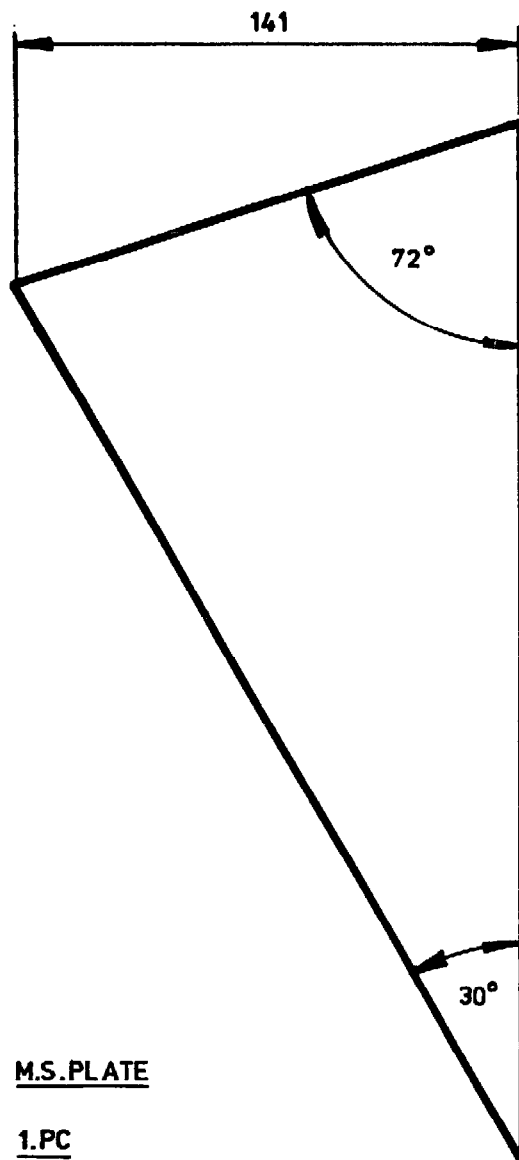

M.S. PLATE

1.PC

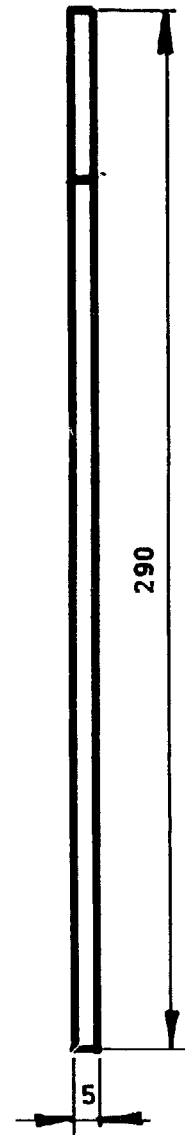

RIB



1:2

T3/04/00 S13

BRACING PLATE

T3V02V00

214

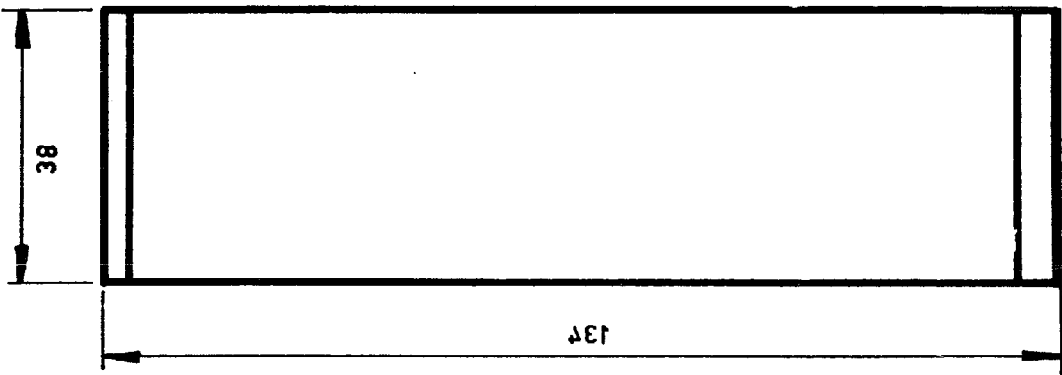
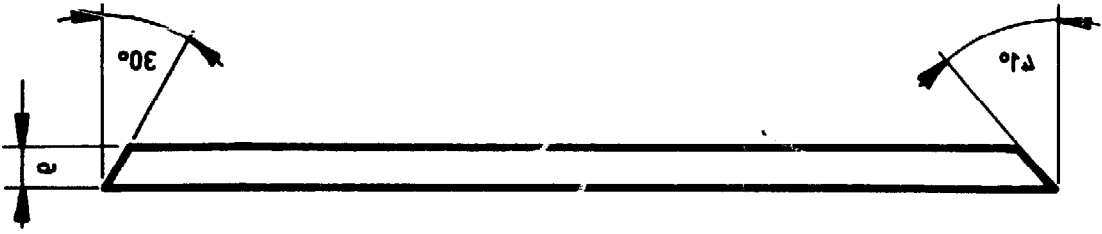


M.S. PLAT
2 PCS

POS	PCS	DENOMINATION	DRAWING NUMBER	SPECIFICATION	REMARKS
1	1	INLET TOP ASSEMBLY	T3/06/01	ASSEMBLY	
1-1	1	INLET TOP PLATE	T3/06/01-1	M.S.PLATE <u>5MM</u> X450Xbo+70	
1-2	1	HATCH DOOR FRAME	T3/06/01-2	M.S.ANGLE <u>25X25X5</u> 520X2(bo+20)	
1-3	1	HATCH DOOR	T3/06/01-3	M.S.PLATE <u>5MM</u> X260Xbo+70	
	1			" " 190Xbo	
	2			M.S.ANGLE <u>25X25X5</u> Xbo	
1-4	1	HATCH DOOR GASKET	T3/06/01-4	RUBBER <u>2MM</u> X260Xbo+70	
2	1	INLET BOTTOM PLATE	T3/06/02	M.S.PLATE <u>5MM</u> X260Xbo+4	
3	2	INLET FLANGE	T3/06/03	M.S.FLAT <u>50X6</u> 400X2(bo+100)	
4	2	INLET SIDE PLATE	T3/06/04	M.S.PLATE <u>5MM</u> X189X401	

INLET ASSEMBLY
PART LIST


T3/06/00 S1

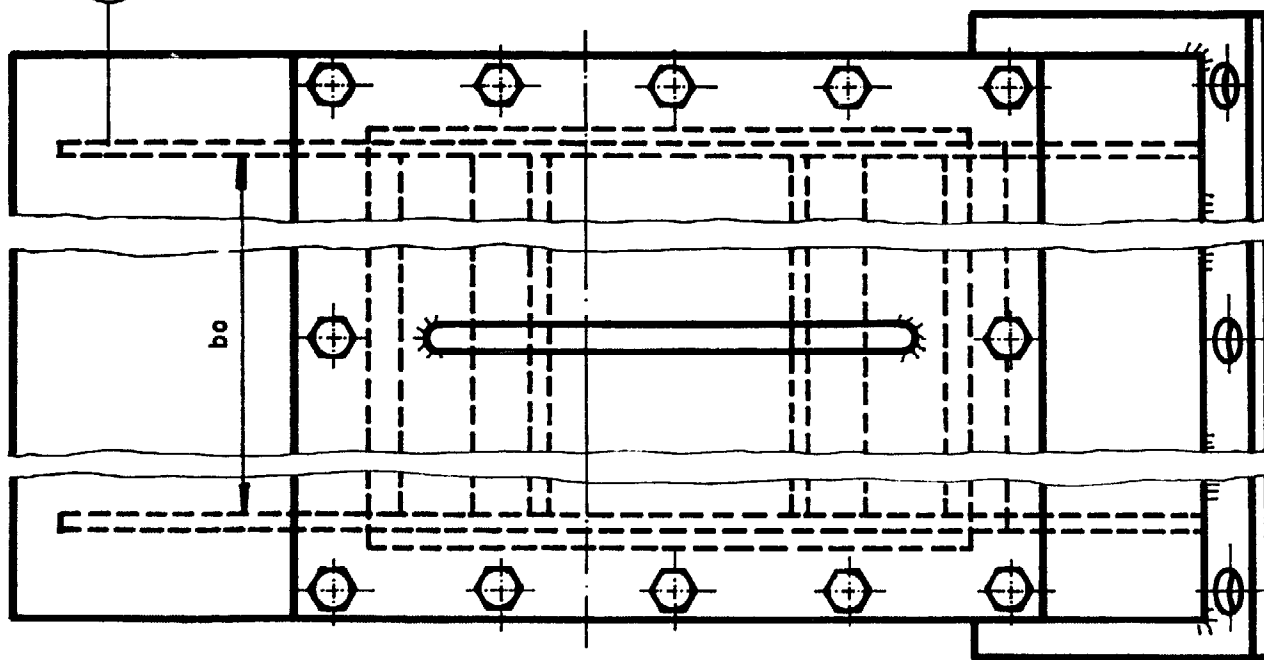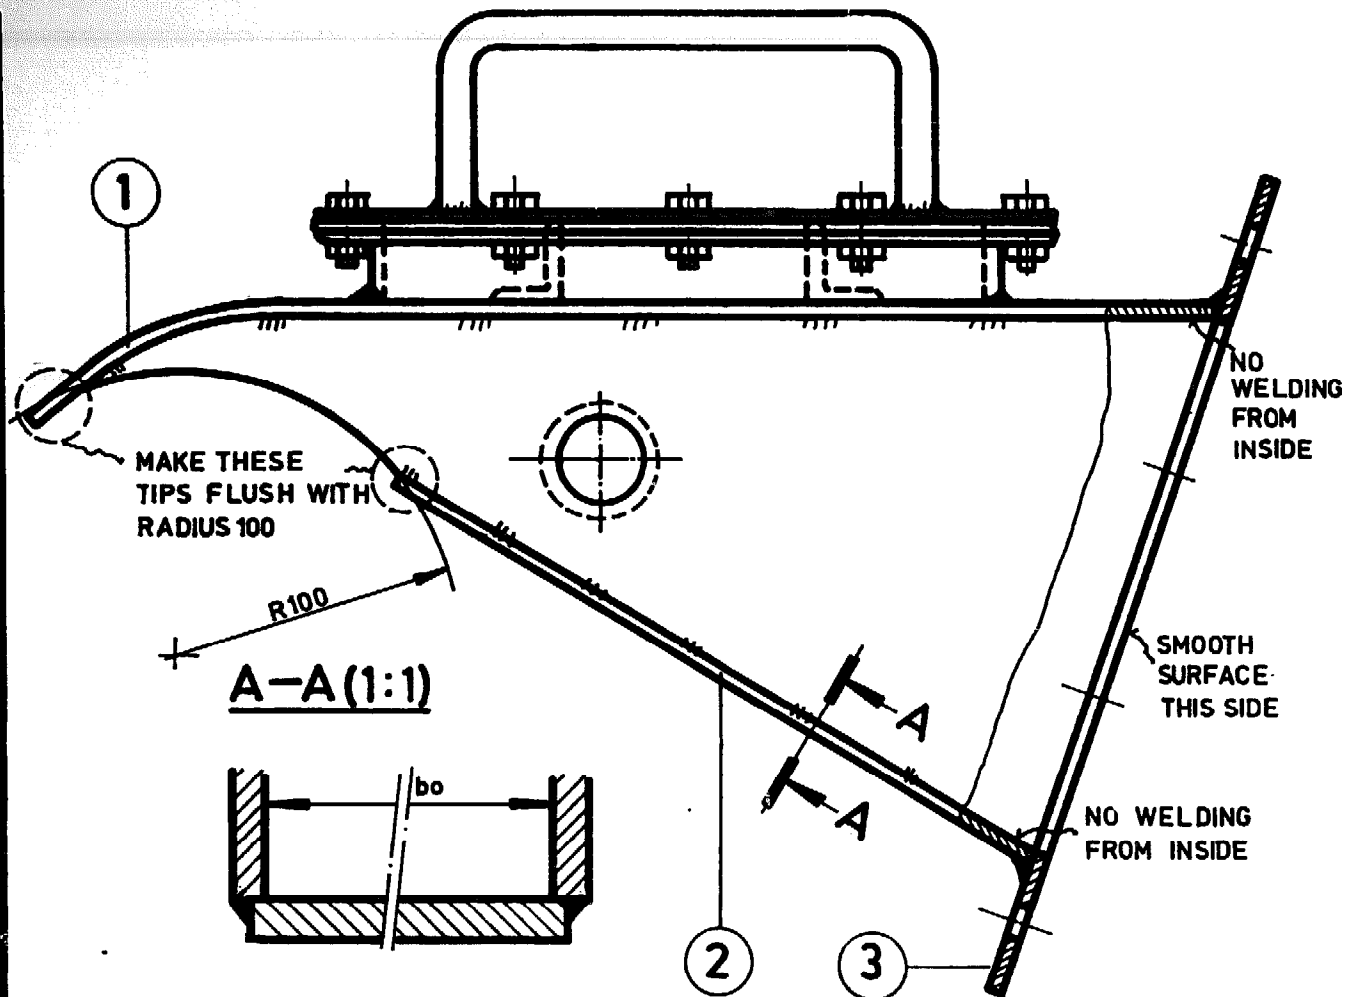

INLET ASSEMBLY

T3/06/00 S16


1:2.5 (1:1)

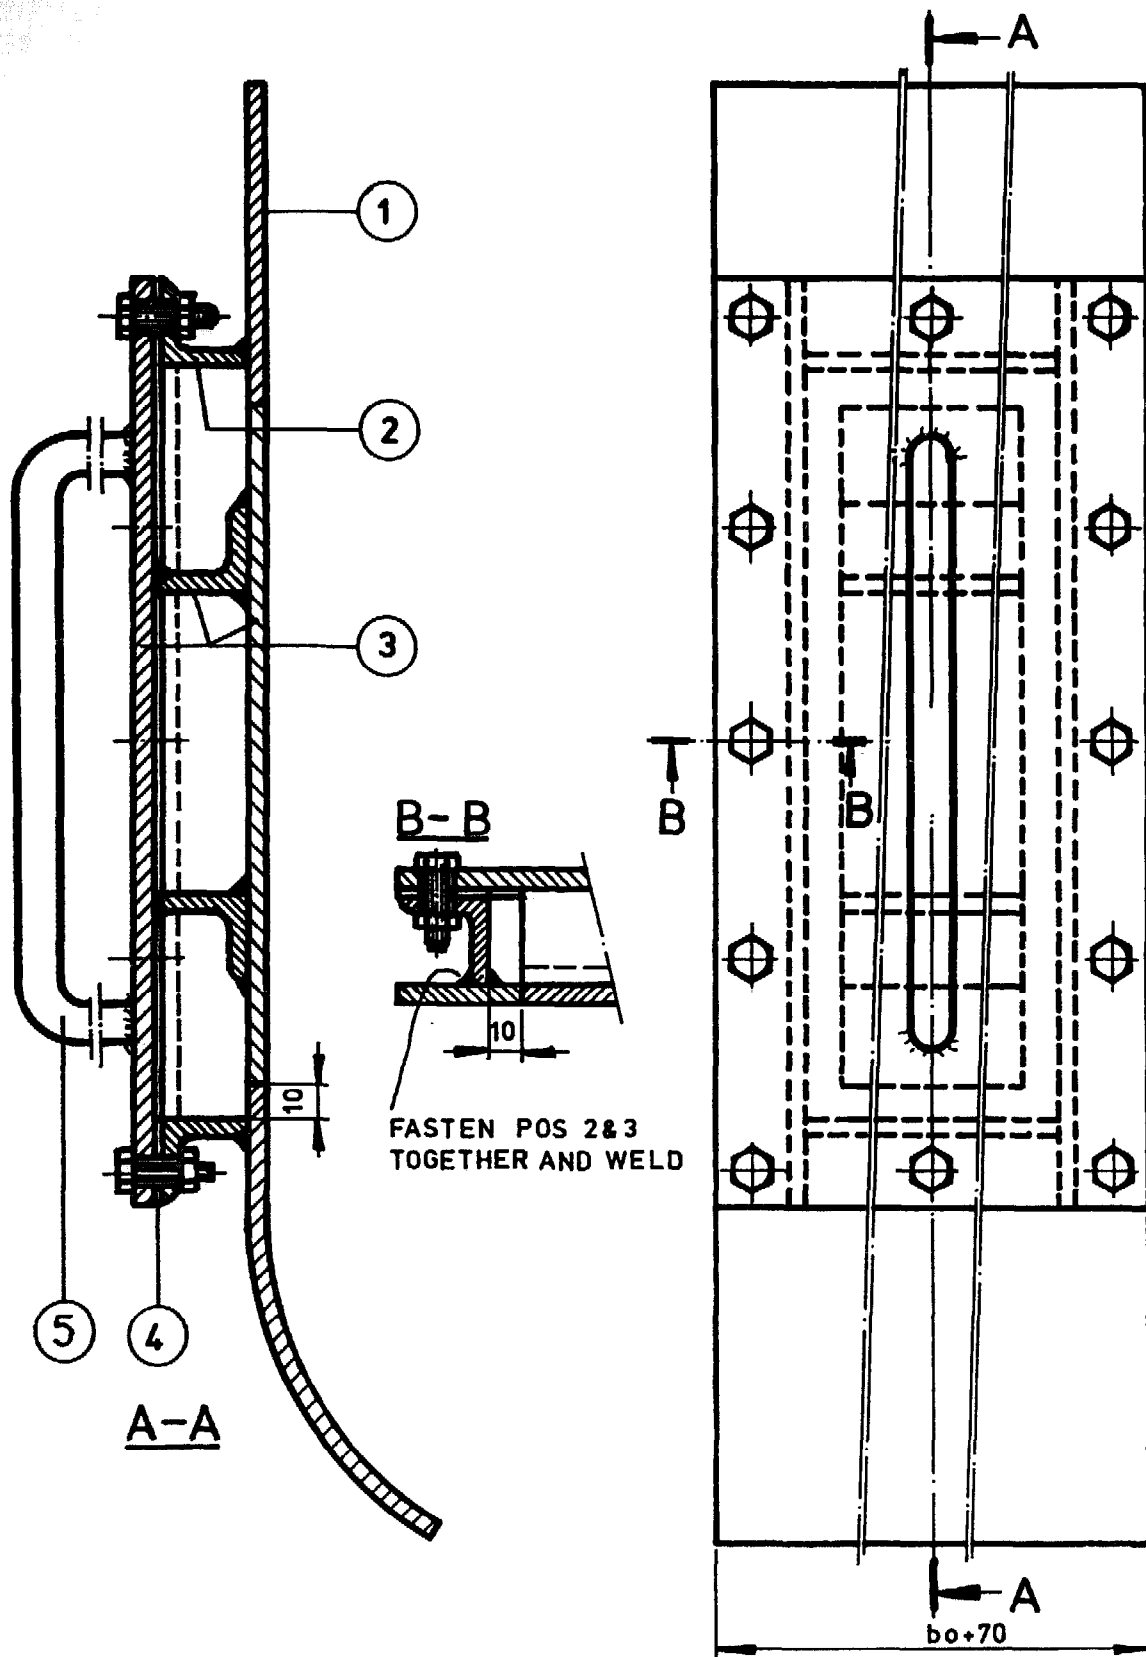

INLET TOP ASSEMBLY

T3/06/01 S17

1:2

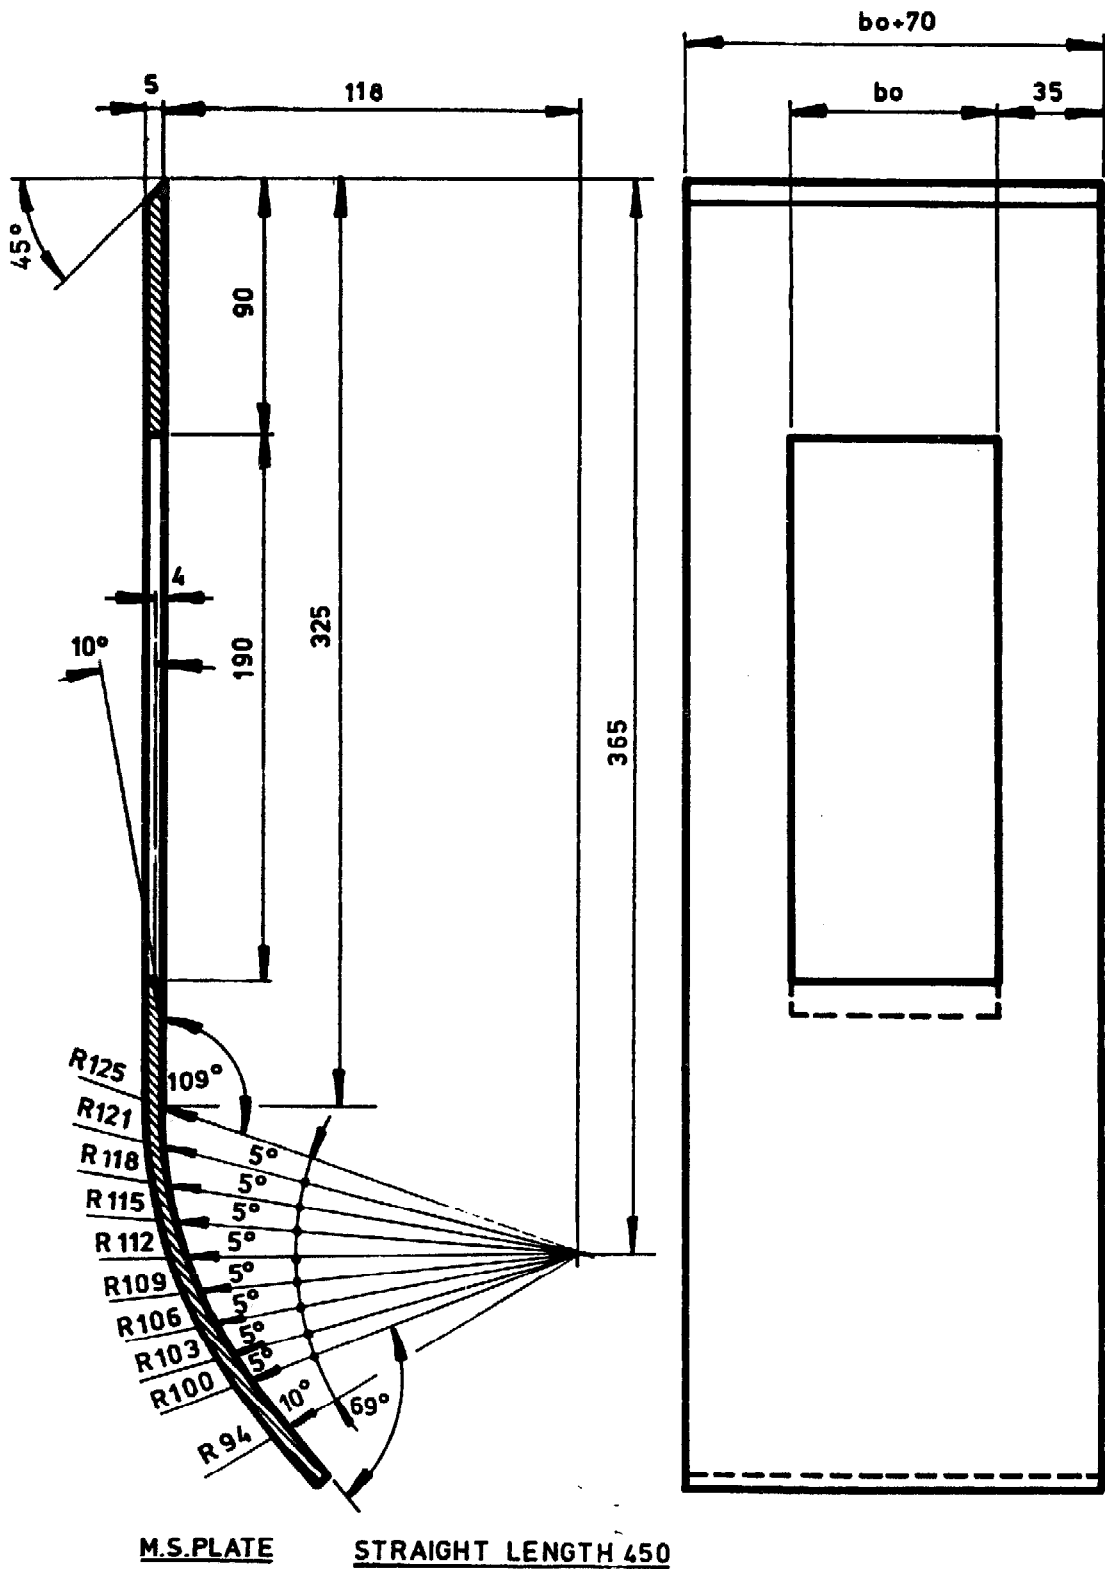

M.S. PLATE

STRAIGHT LENGTH 450

1.PC

INLET TOP GUIDE


T3/06/01-1 S18

1:25



M.S. ANGLE 5X25X25

DRILL THESE HOLES TOGETHER WITH
POS.T3/06/01-3

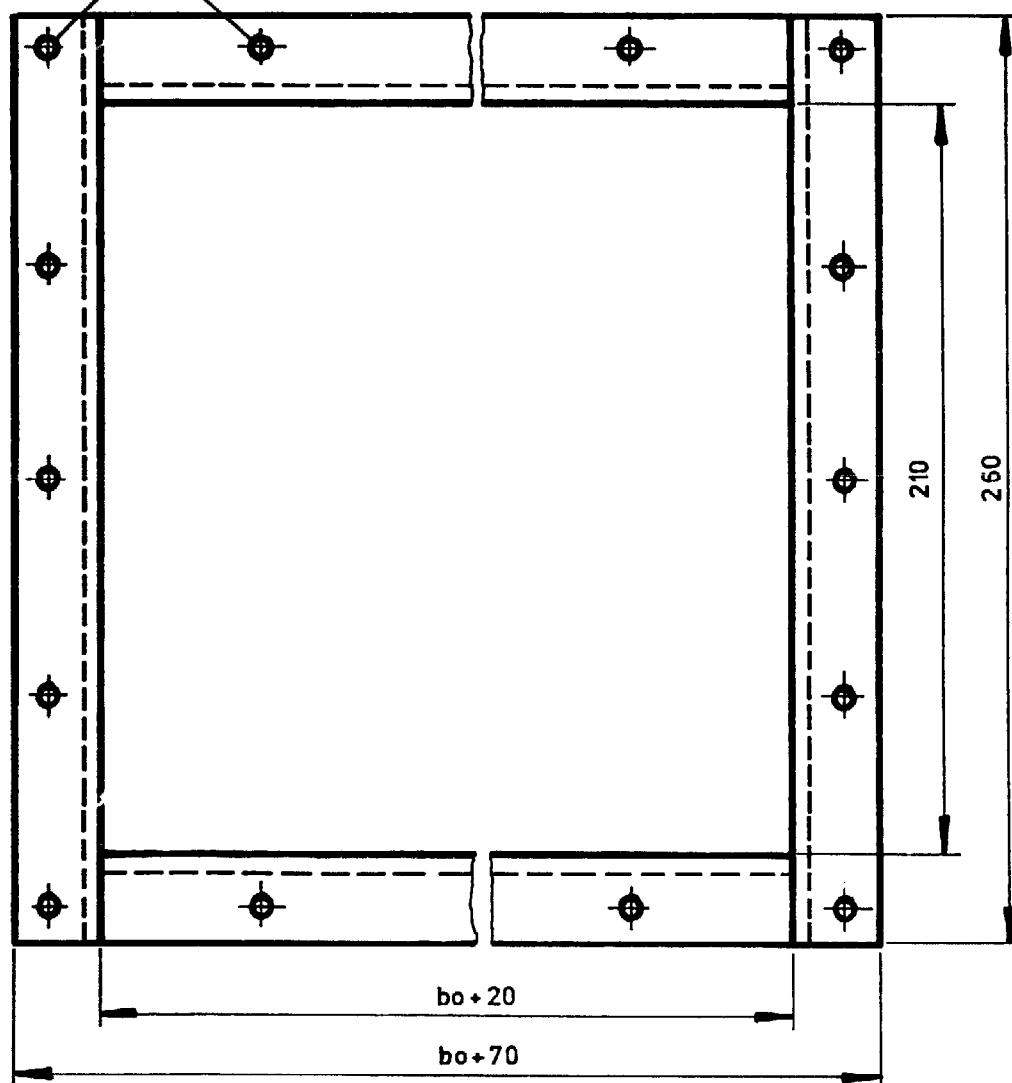

1.PC


HATCH DOOR FRAME

T3/06/01-2 S19

1:2


HATCH DOOR

T3/06/01-3 S20

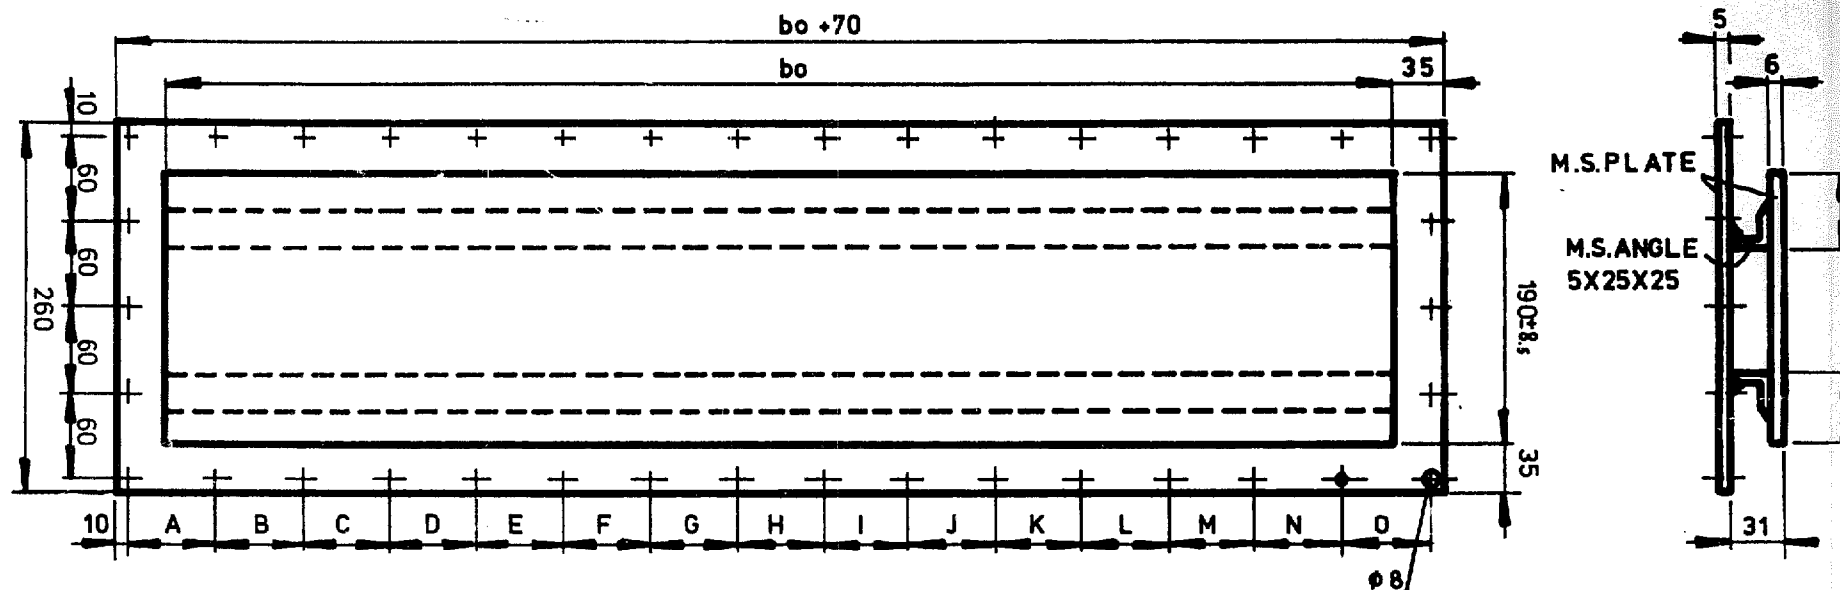

1. PC

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
bo 50	50	50													
bo 70	40	40	40												
bo 90	47	46	47												
bo120	43	42	42	43											
bo160	42	42	42	42	42										
bo220	54	54	54	54	54										
bo290	57	57	56	56	57	57									
bo390	63	63	63	63	63	63	63								
bo520	64	63	63	63	64	63	63	63	64						
bo690	68	67	67	67	67	68	67	67	67	67	68				
bo920	65	65	65	65	65	64	64	64	64	64	65	65	65	65	65

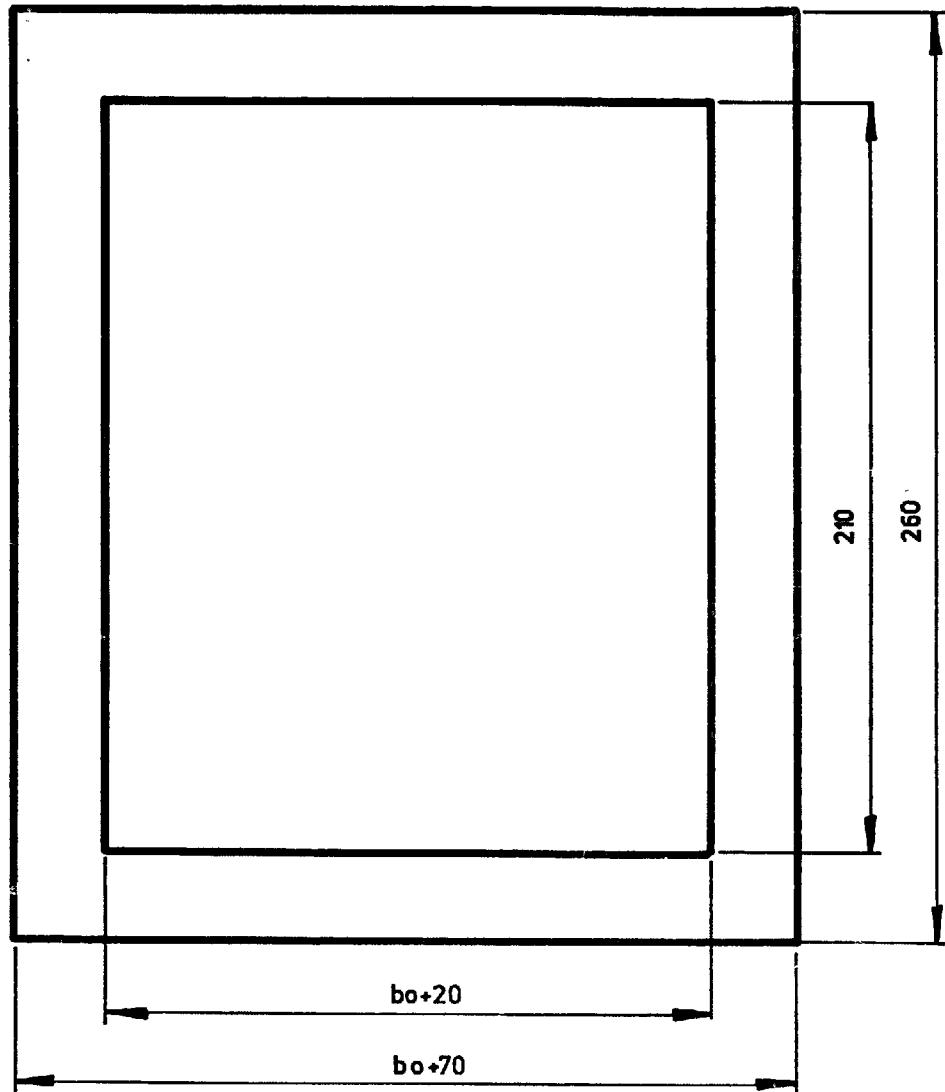



RUBBER 2MM

1.PC

HATCH DOOR GASKET

T3/06/01-4 S21



1:2

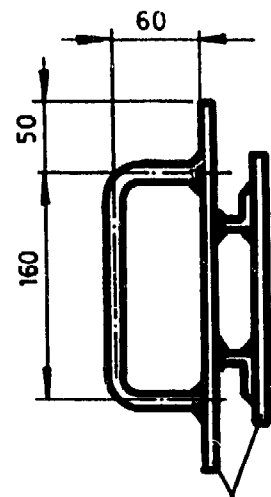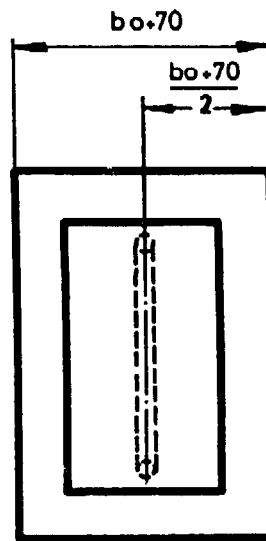

M.S. ROD $\phi 1/2"$ X 295
1.PC

T3/06/01-3

VALID FOR	bo-50	bo-70	bo-90	bo-120	bo-160
-----------	-------	-------	-------	--------	--------

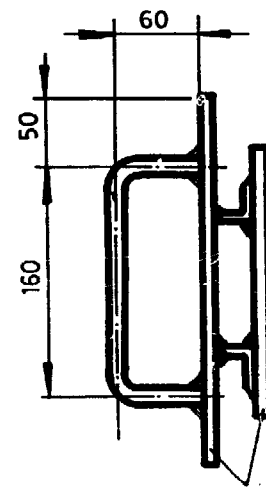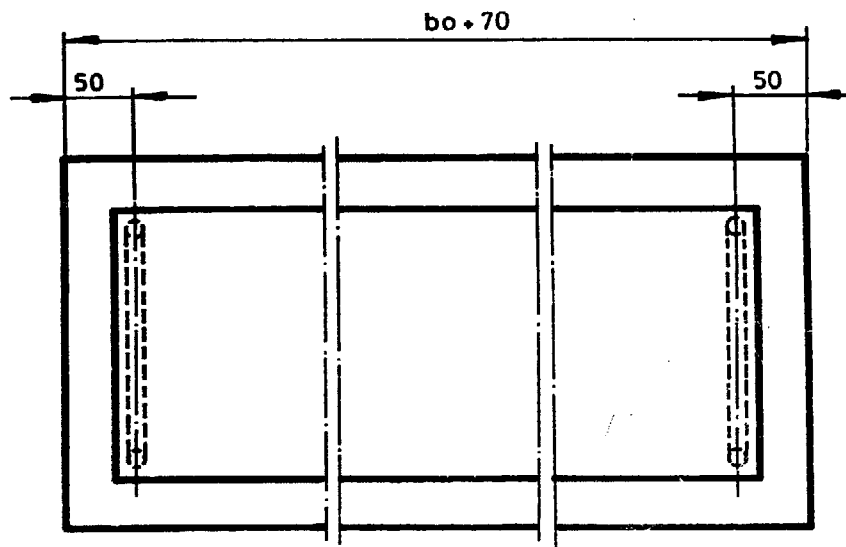

M.S. ROD $\phi 1/2"$ X 295


2.PCS

VALID FOR	bo-220	bo-290	bo-390	bo-520	bo-690	bo-920
-----------	--------	--------	--------	--------	--------	--------

T3/06/01-3

HANDLE

T3/06/01.5 S22

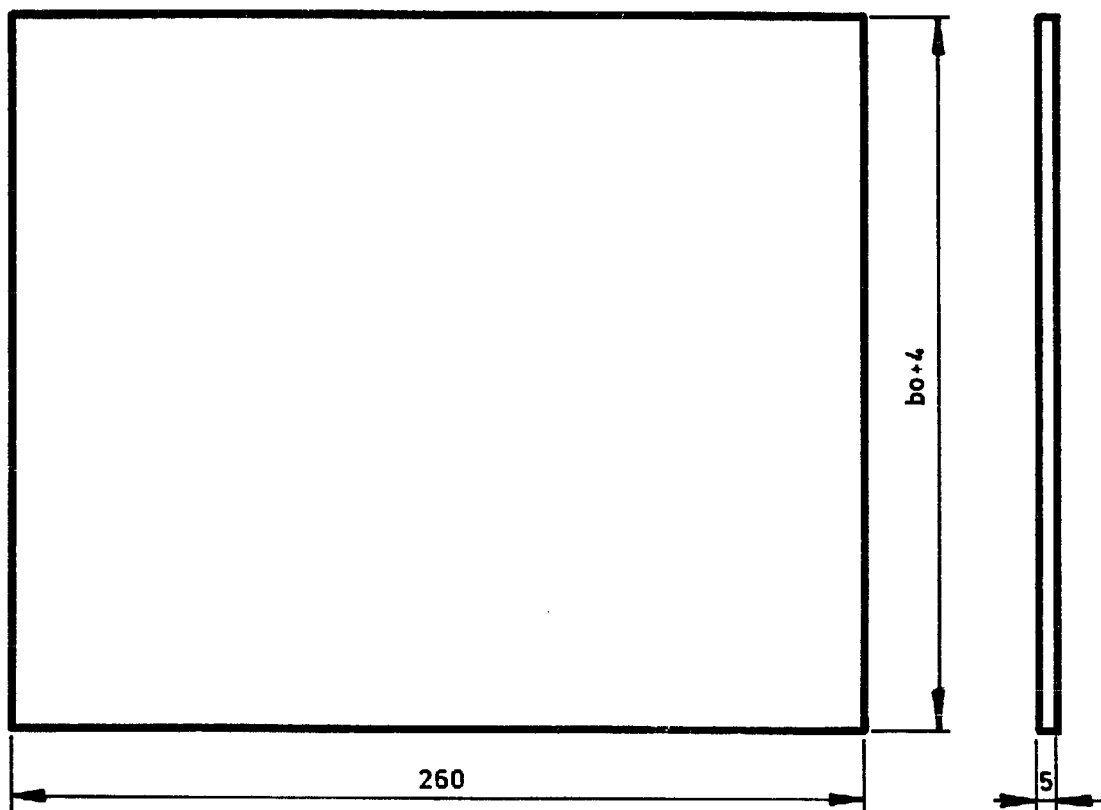

M.S.PLATE

1.NO

INLET BOTTOM PLATE


T3/06/02

S23

1:2



	A	B	C	D	E	F	G	H	I	J	K	L	M
bo 50	55	55											
bo 70	65	65											
bo 90	75	75											
bo 120	60	60	60										
bo 160	75	70	75										
bc 220	70	70	70	70									
bo 290	70	70	70	70	70								
bo 390	75	75	75	75	75	75							
bo 520	73	73	72	72	72	72	73	73					
bo 690	75	75	75	75	75	75	75	75	75	75			
bo 920	76	76	75	75	75	75	76	75	75	75	75	76	76

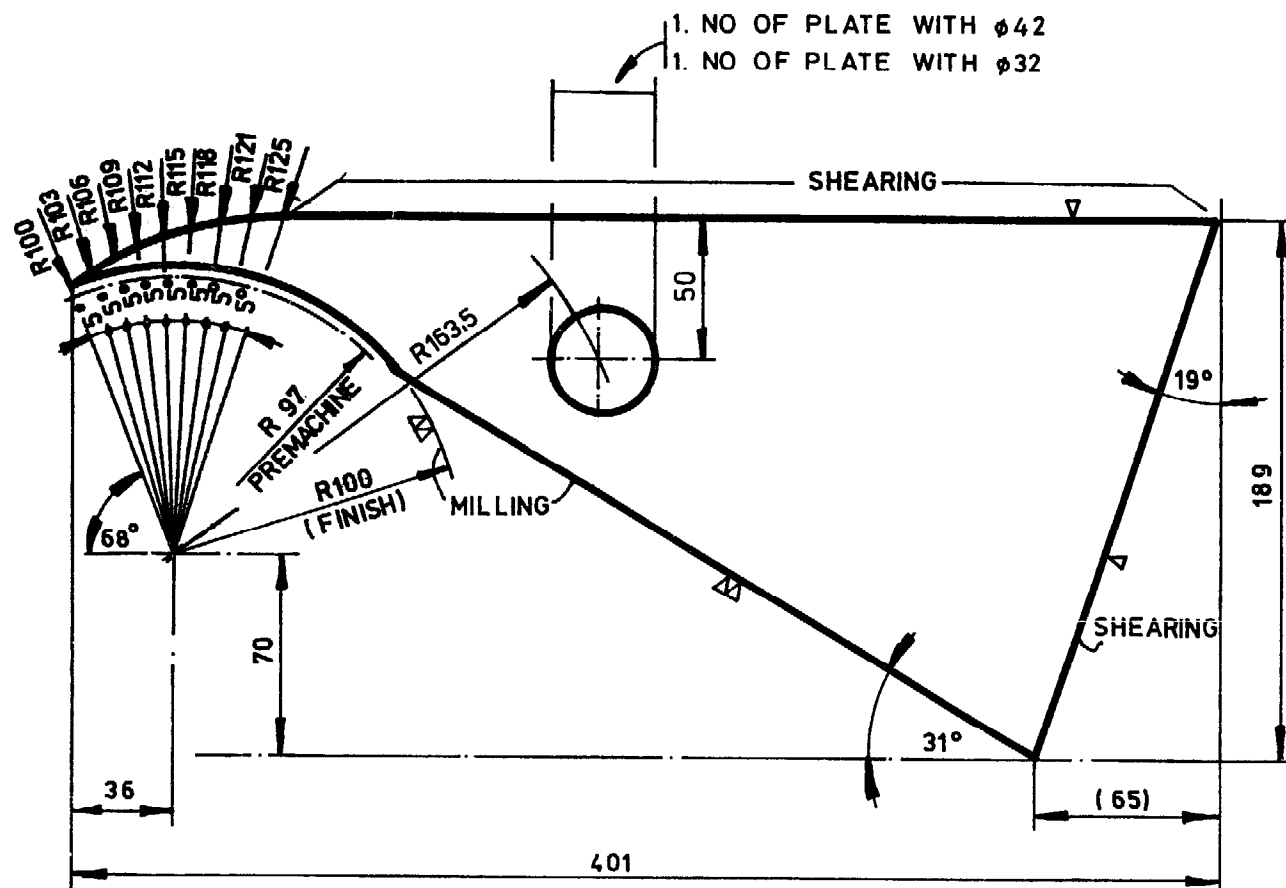


M.S. PLATE 5MM

2.NOS

INLET SIDE PLATE

T3/06/04 | S25

1:25

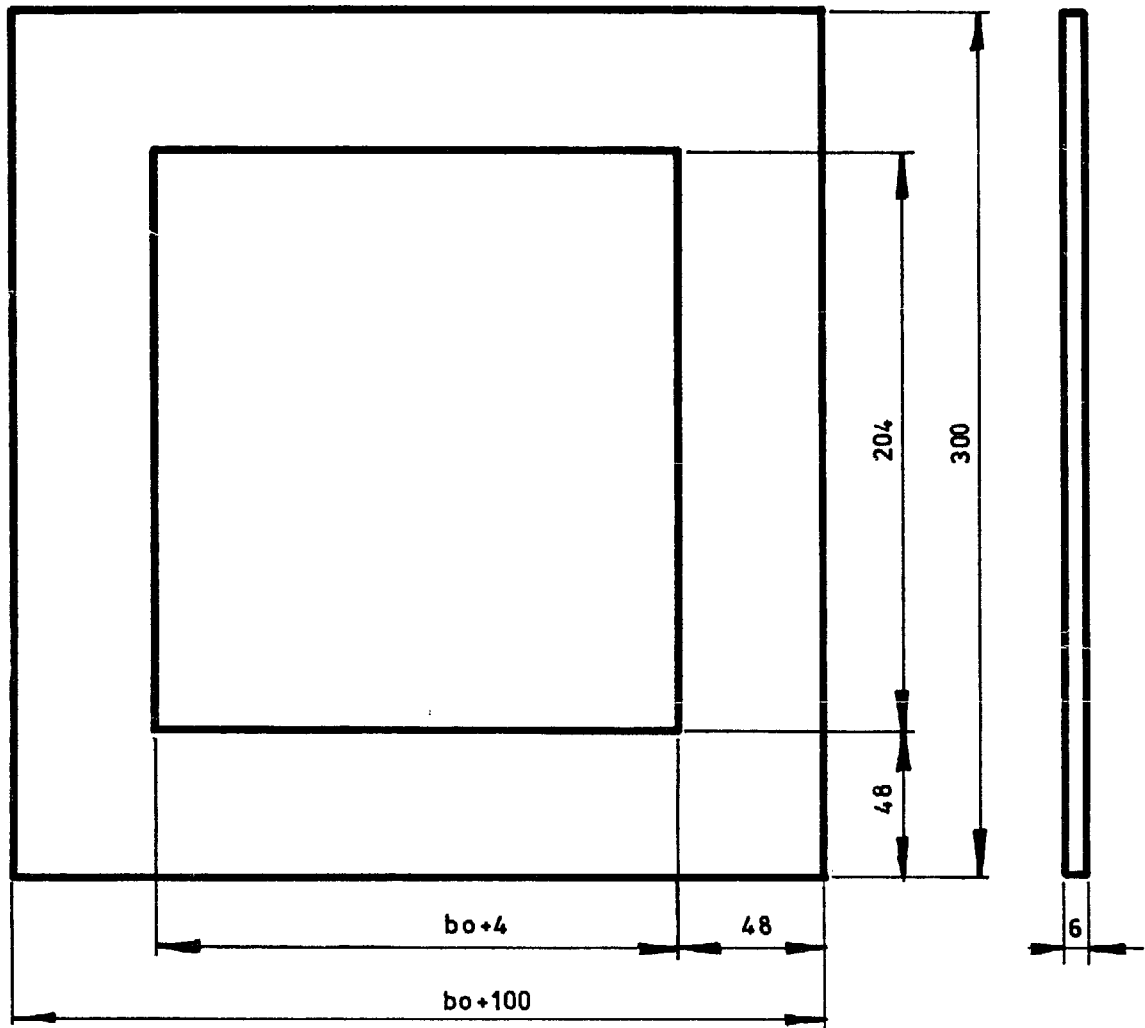


RUBBER SHEET

1.PC

INLET GASKET

T3/07/00 S26

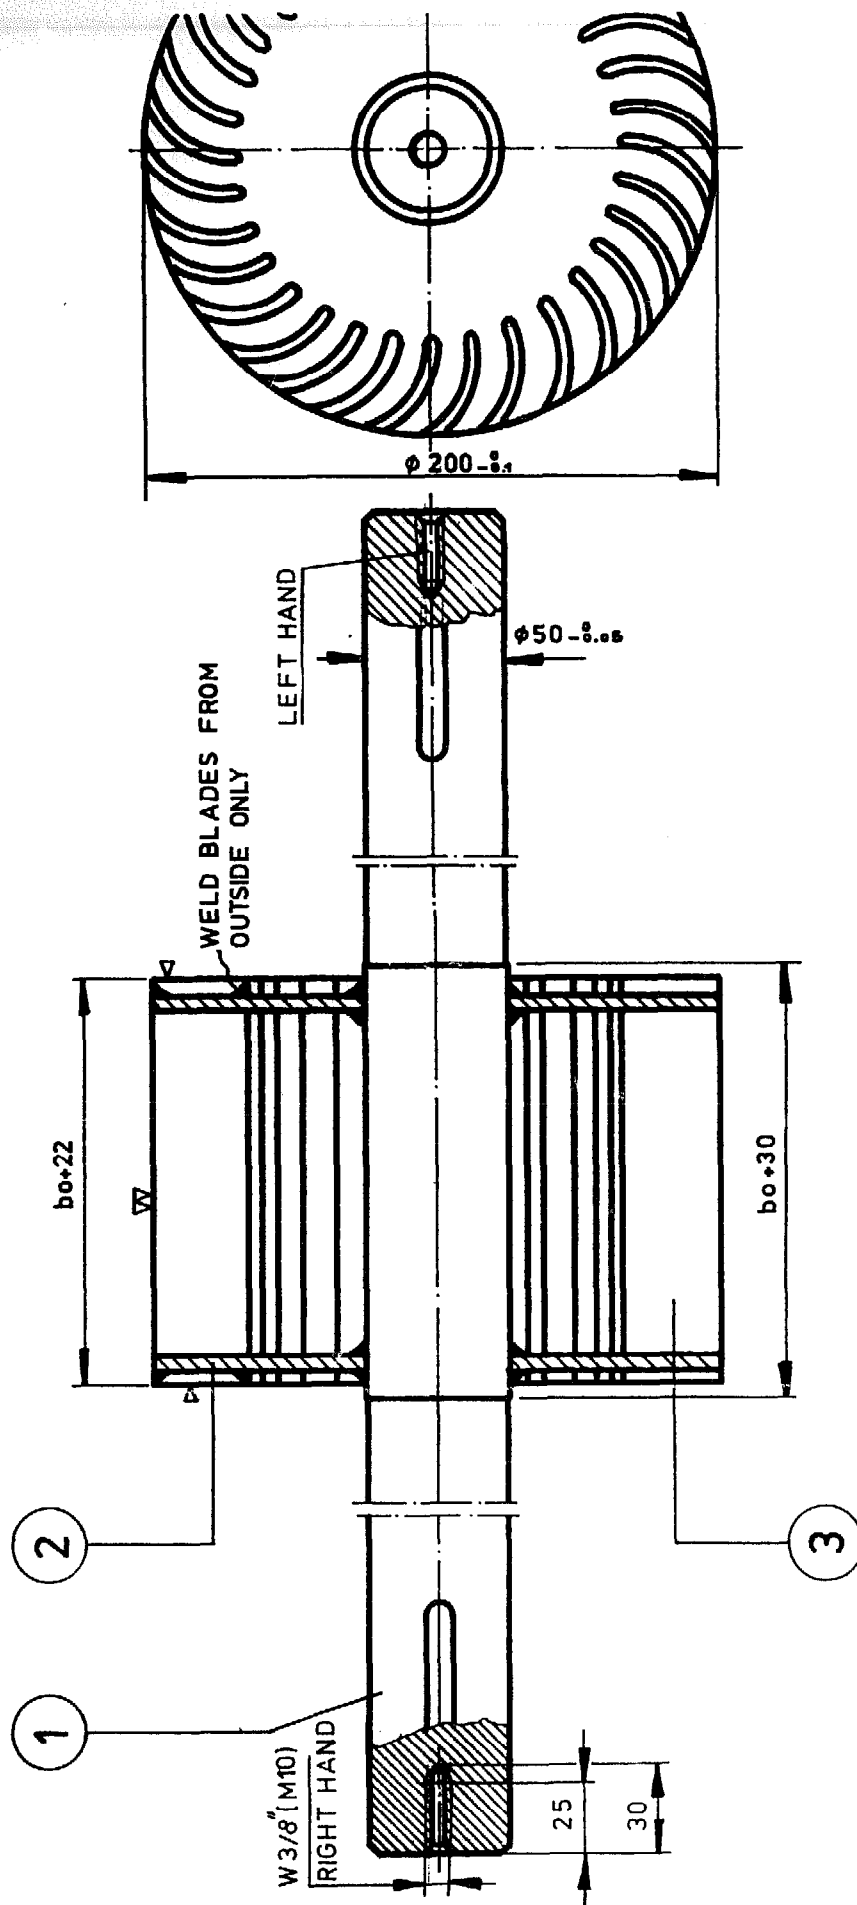



1.PC

ROTOR ASSEMBLY

T3/08/00

S28

1:2.5

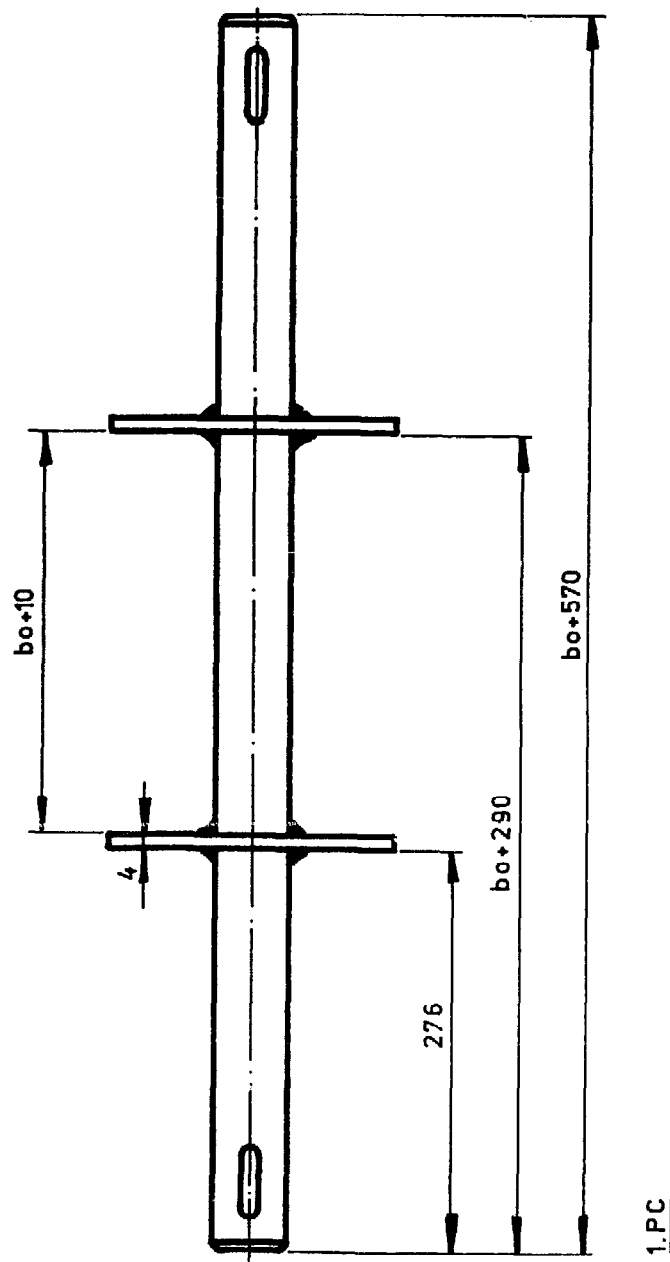



ROTOR DISC ARRANGEMENT 'A'

T3/08/00

S29


1:5

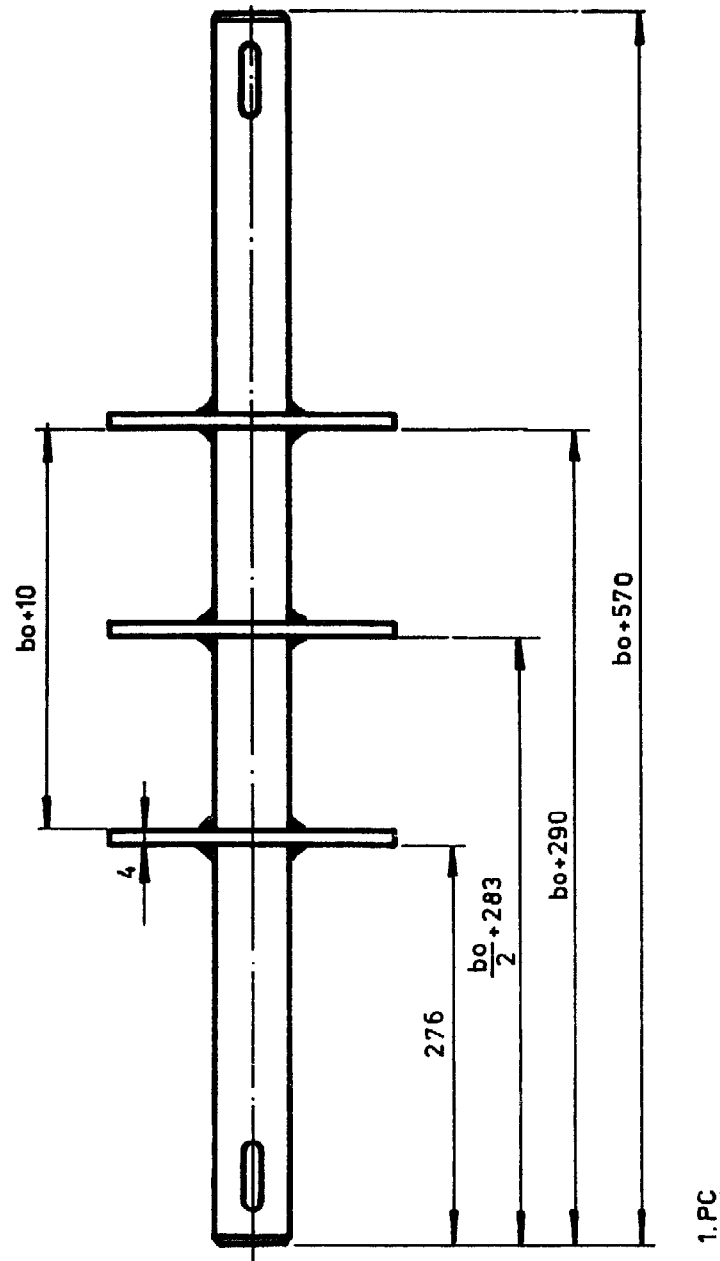

ROTOR DISC ARRANGEMENT 'B'

T3/08/00

S30

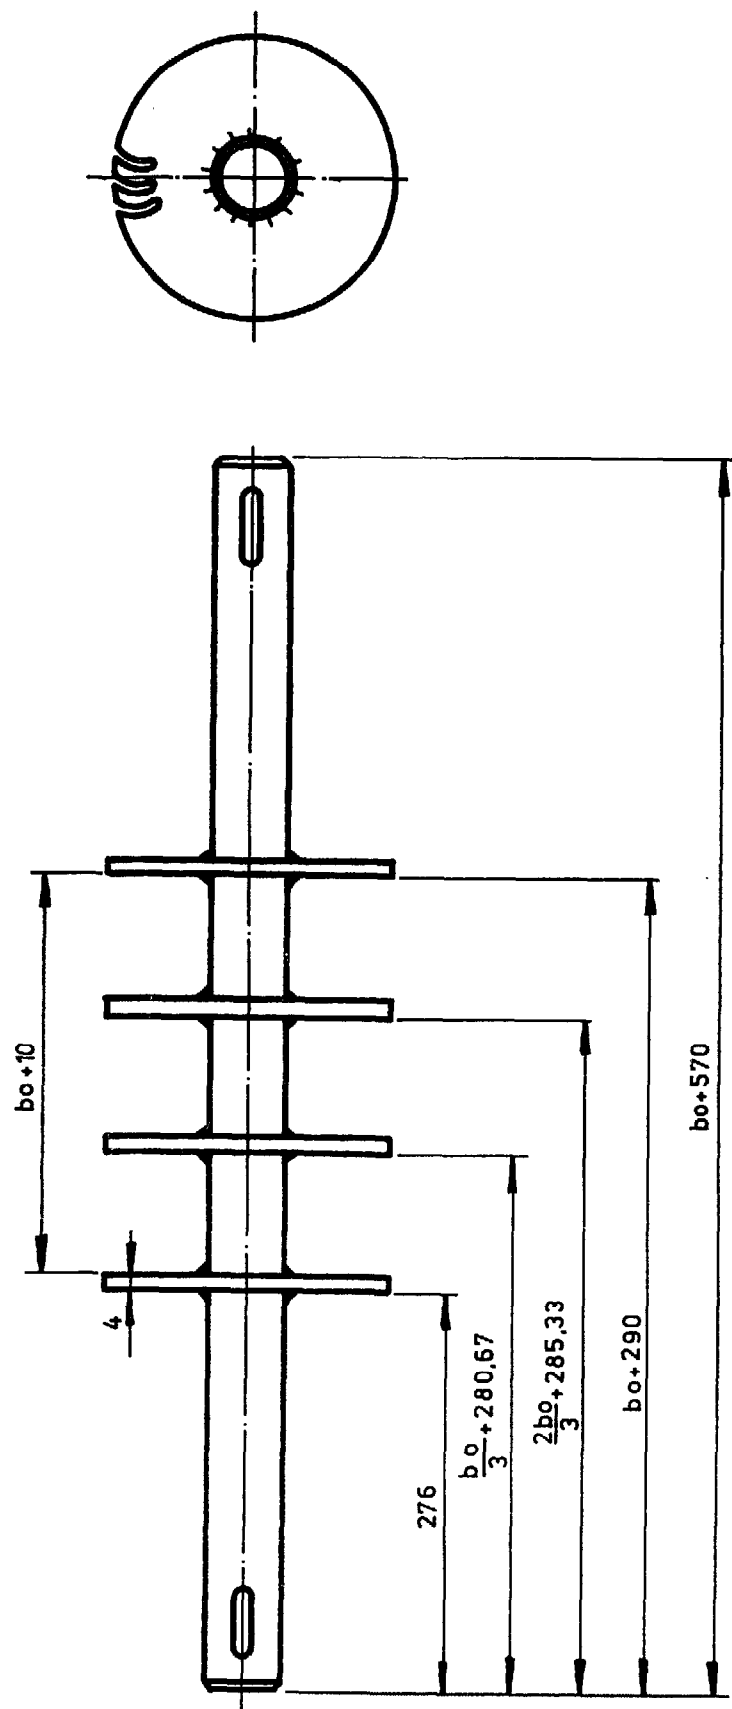



1.PC

ROTOR DISC ARRANGEMENT 'C'

T3/08/00

S31

1:5

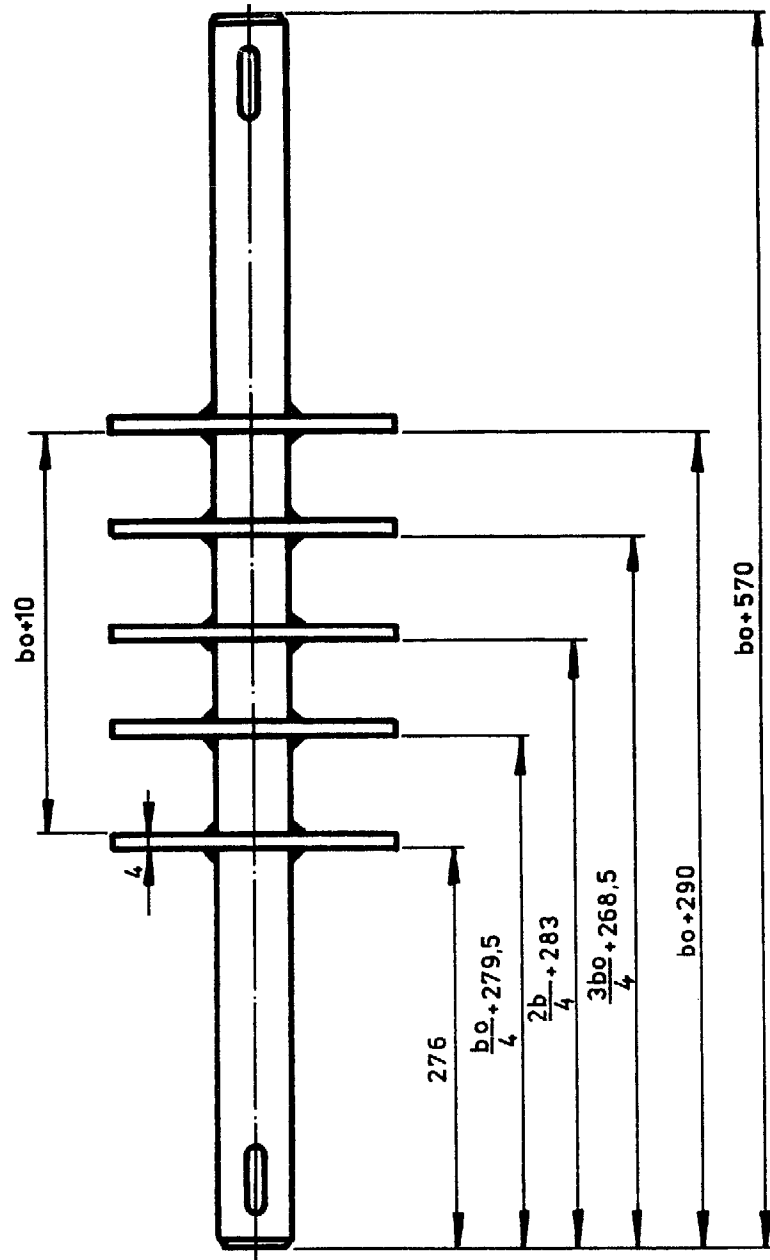



1.PC

ROTOR DISC ARRANGEMENT 'D'

T3/08/00 S32

1:5

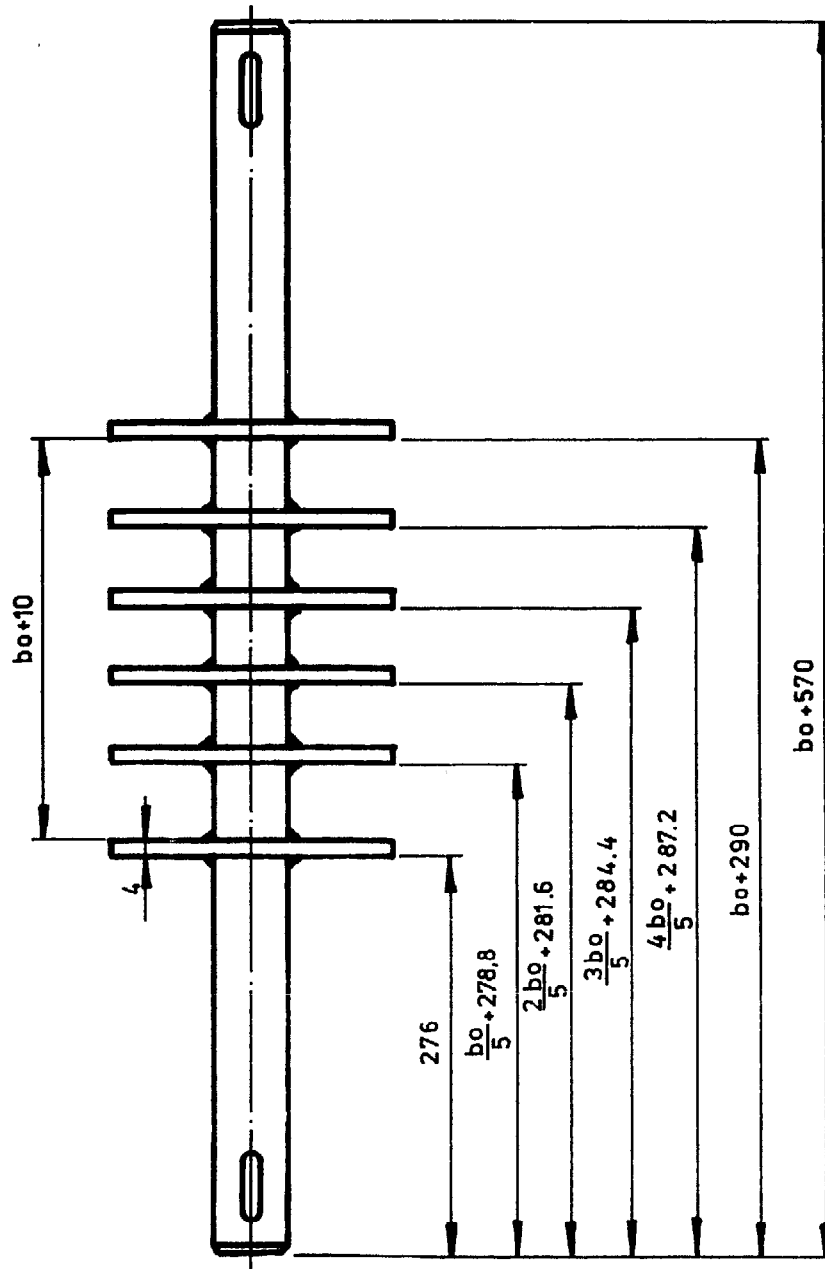

1 P.C.

ROTOR DISC ARRANGEMENT 'E'

T3/08/00

S33


1:5

A28.L

1:2

ROTOR SHAFT
(PREMACHINED)


T3/08/01 S34

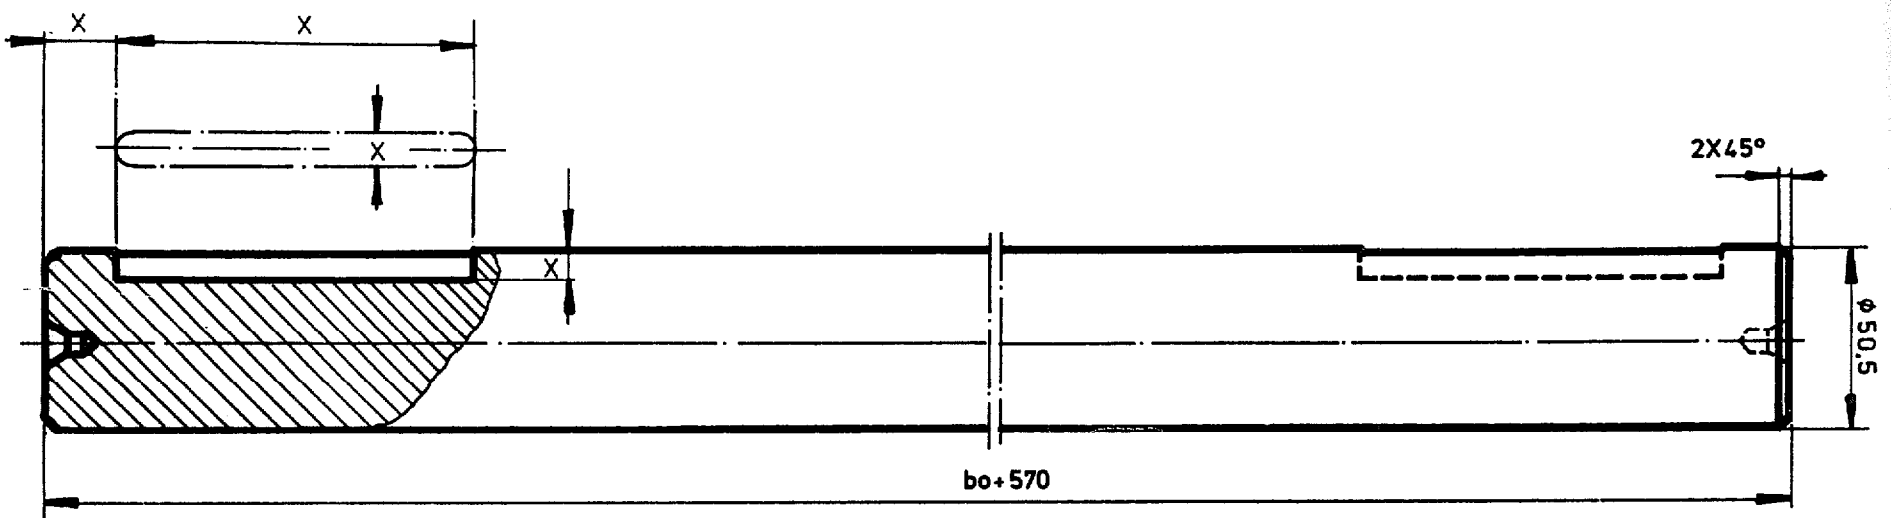

M.S.ROD 2*(50,8)

X . DIMENSION ACCORDING TO PULLEY USED

1.PC

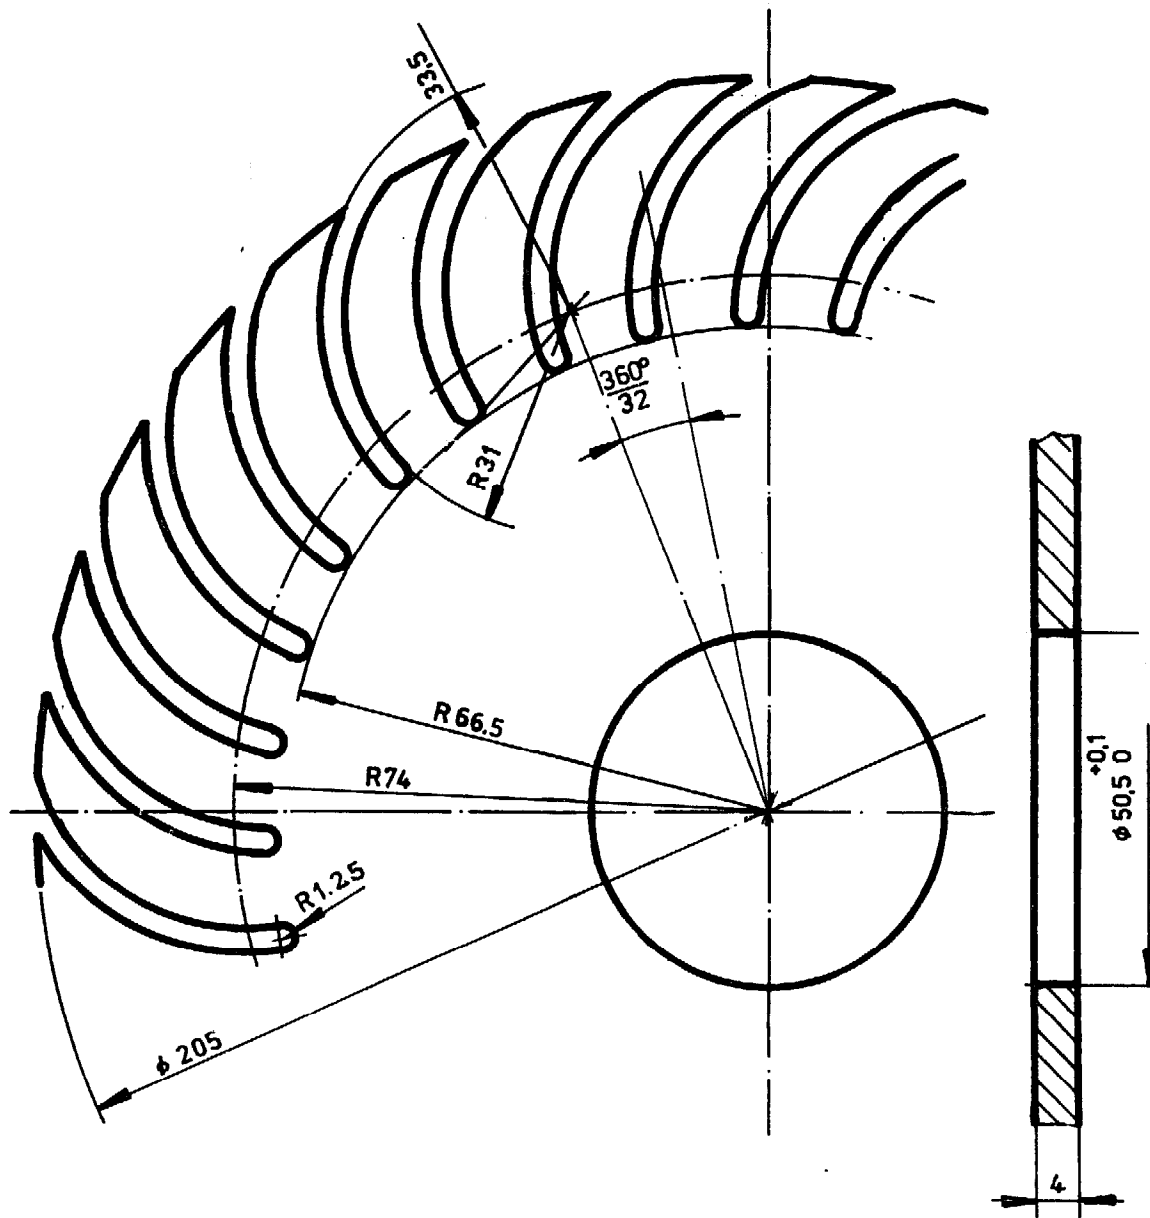

M.S. PLATE


PC

ROTOR DISC

T3/08/02


S35

1:1

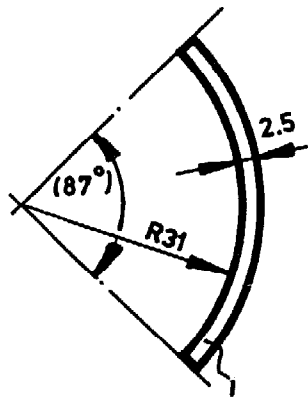


STRAIGHT LENGTH

= 49

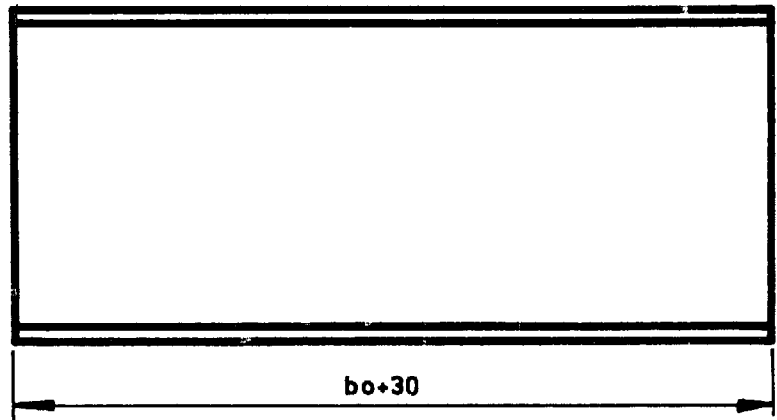

EDGE PROFILE (2 : 1)

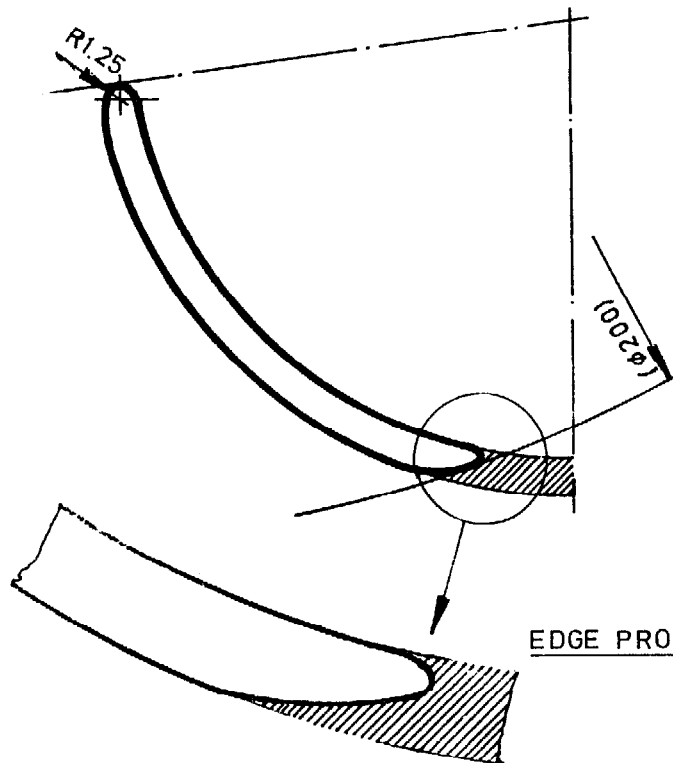

M.S.SHEET

32.PCS



EDGE PROFILE (5 : 1)

BLADE

T8/08/03

S36

1:1 (2:1) (5:1)

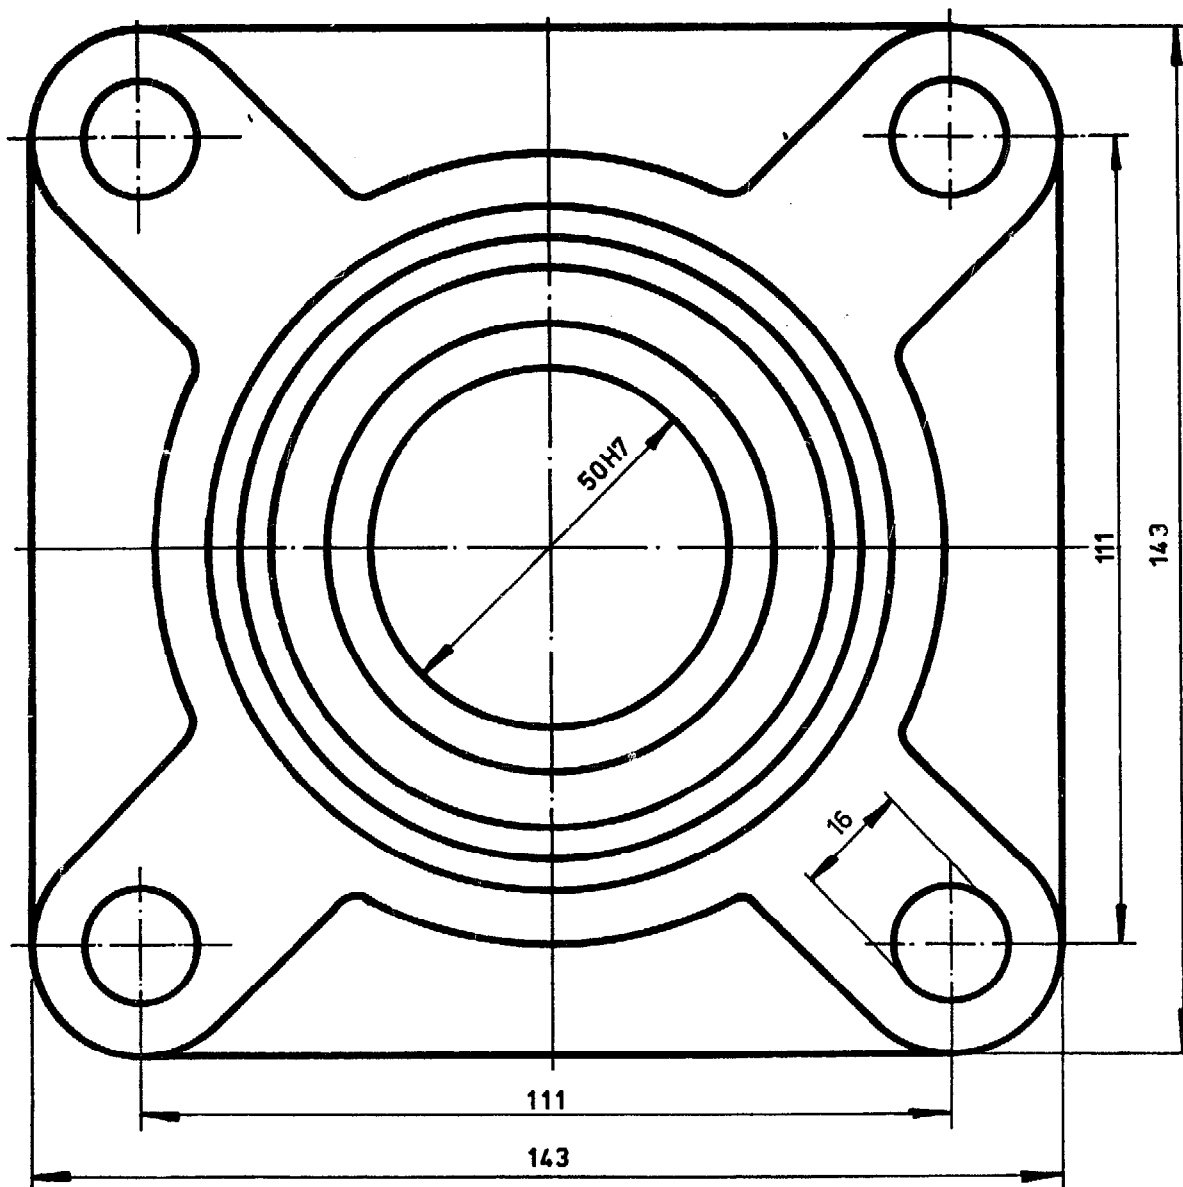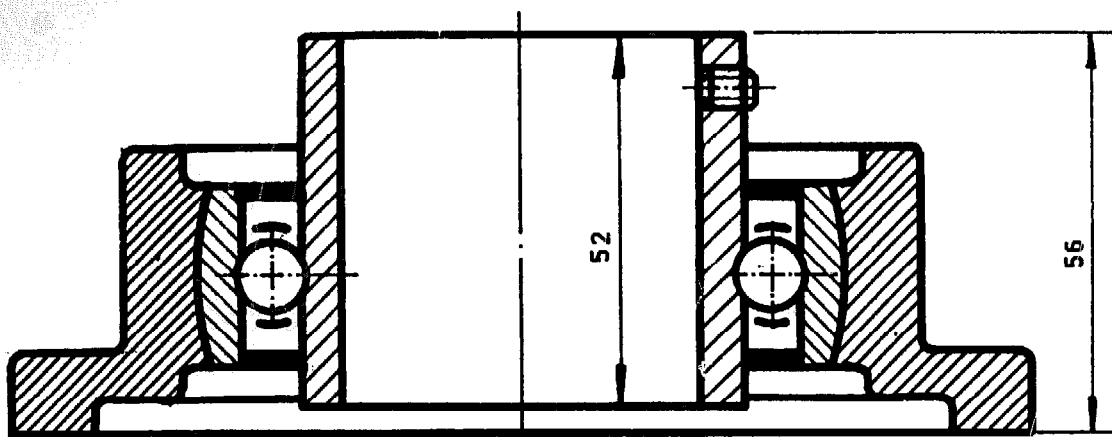

2PCS



BEARING NUMBER FYH F210J UCS10

ROTOR BEARING

T3/09/00

S37

1:1

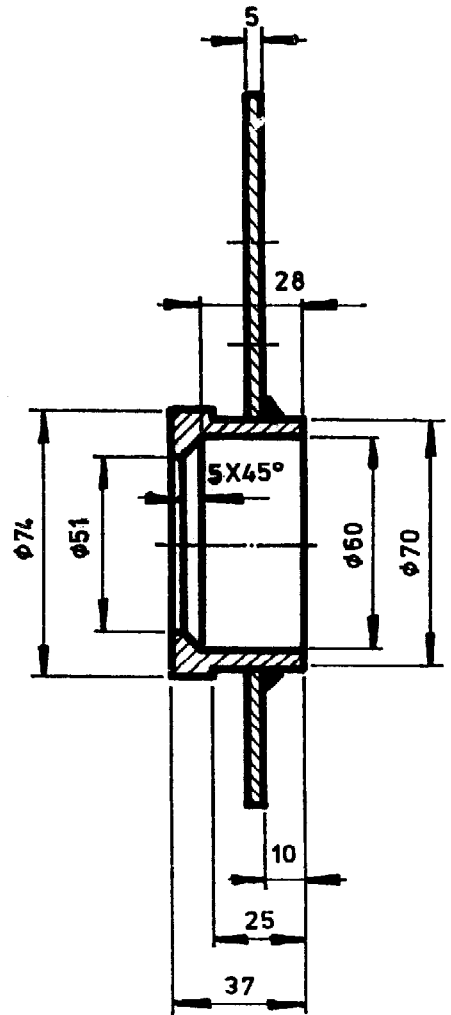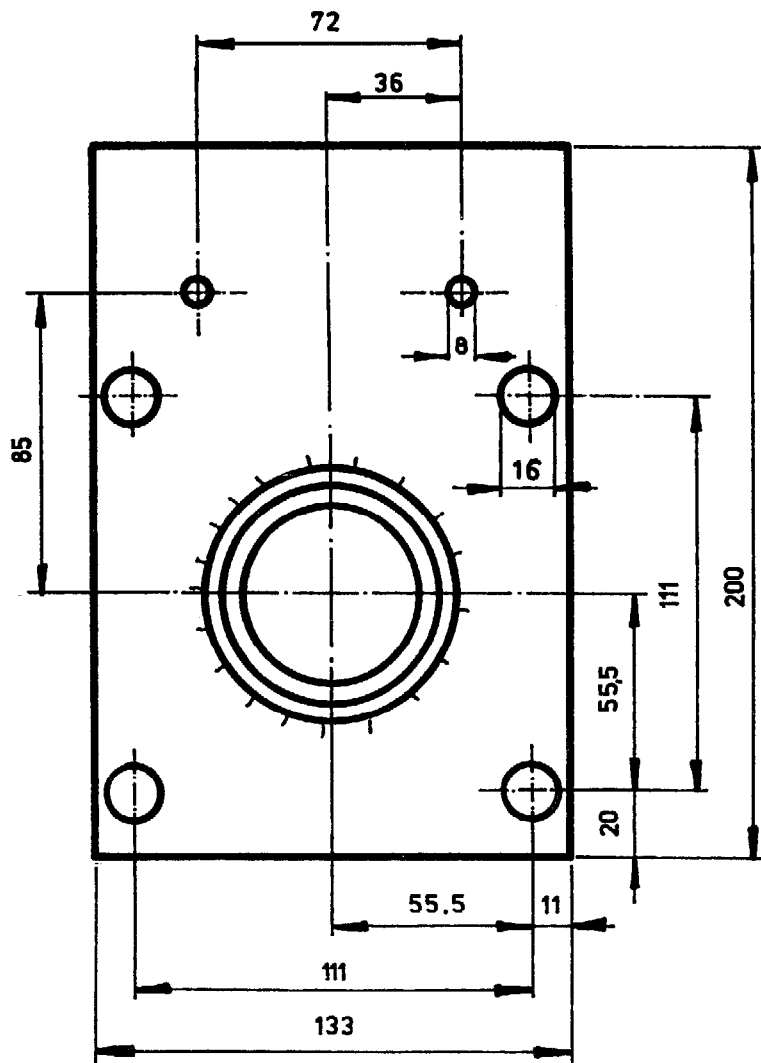

M.S. ROD / PLATE

2.PCS

NOTE.-USE JIG NO.02
TO DRILL HOLES ($\phi 8$, $\phi 16$)


-DO BORING OF $\phi 51$ AND $\phi 60$
AFTER WELDING TO FLAGE.

STUFFING BOX

T3/10/00

S38

1:2

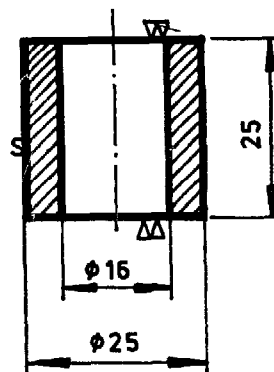

M.S. ROD

8.PCS


1.2.12

SPACER

1:1

T3/11/00

S39

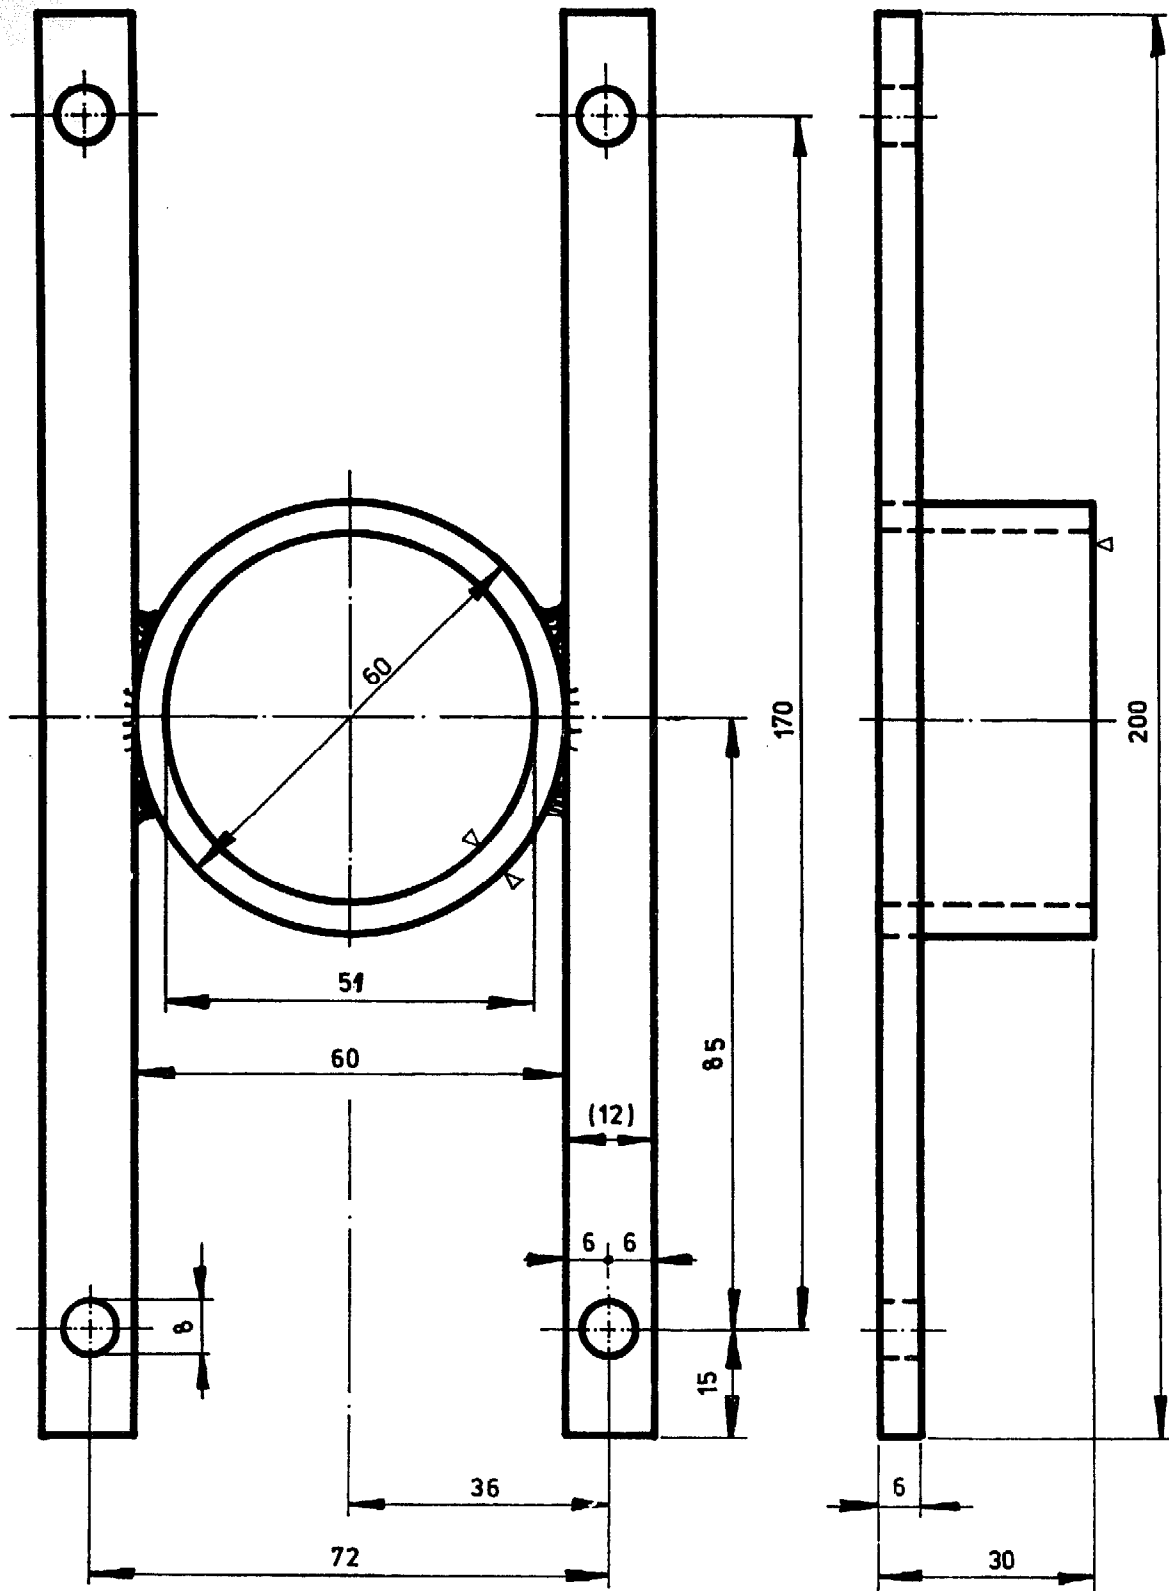


PRESS RING

T3/12/00

S40

1:1

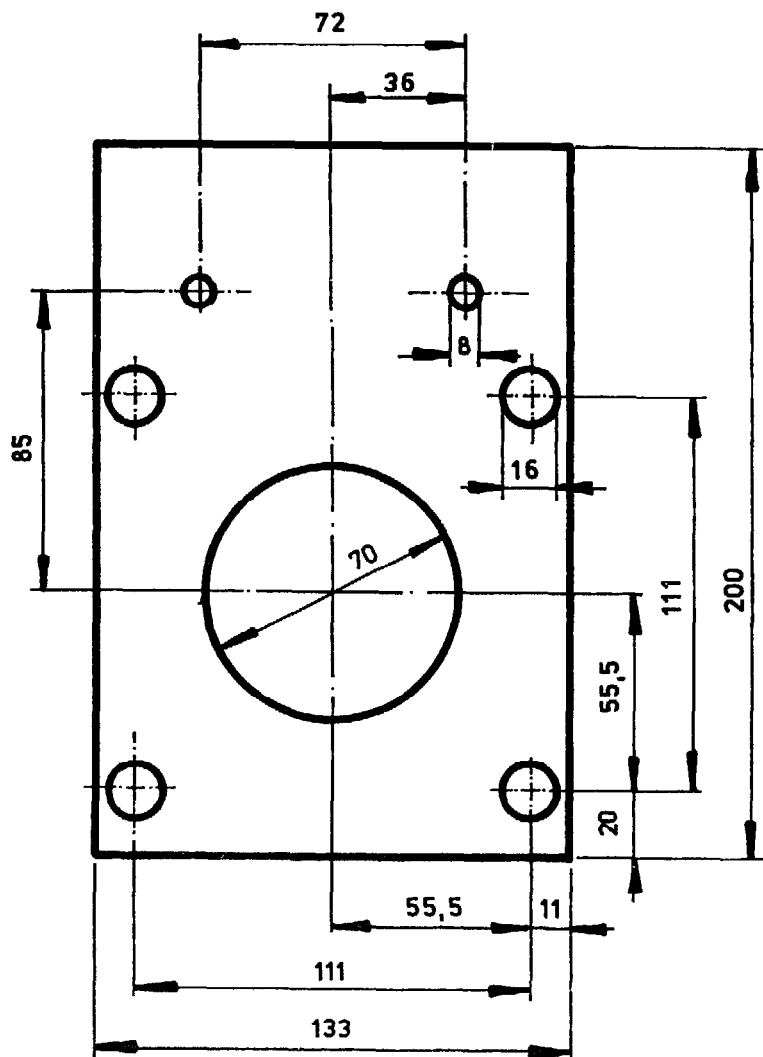



RUBBER 2MM

2 PCS

STUFFING PLATE GASKET T3/13/00

S41

1:2

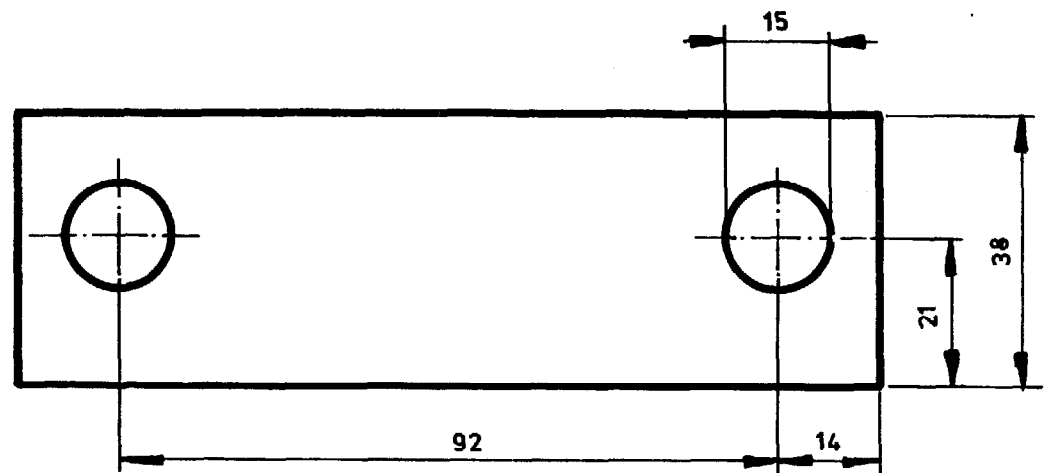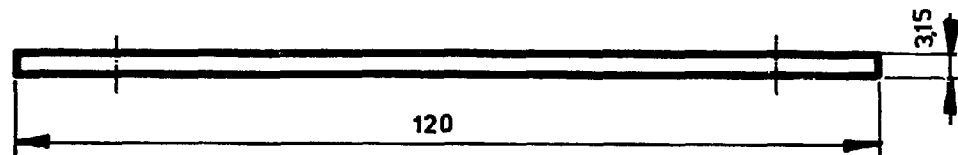

M.S.FLAT



2.PCS

SEALING PLATE

T3/14/00

S42

1:1

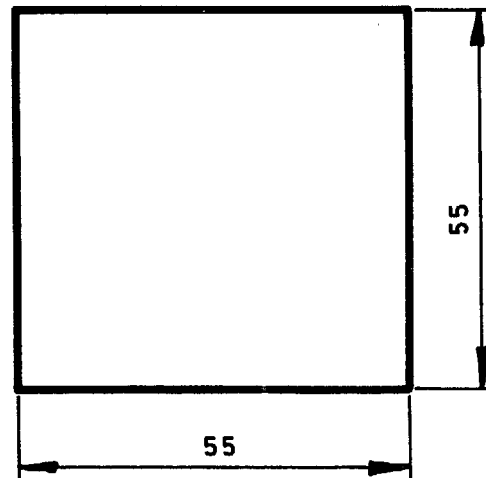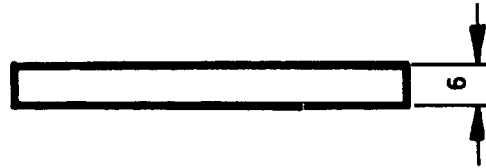

RUBBER SHEET

2.PCS


SEALING PAD


T3/15/00

S43

1:1

BUTTERFLY VALVE SHAFT	T3/16/00	S44
-----------------------	----------	-----

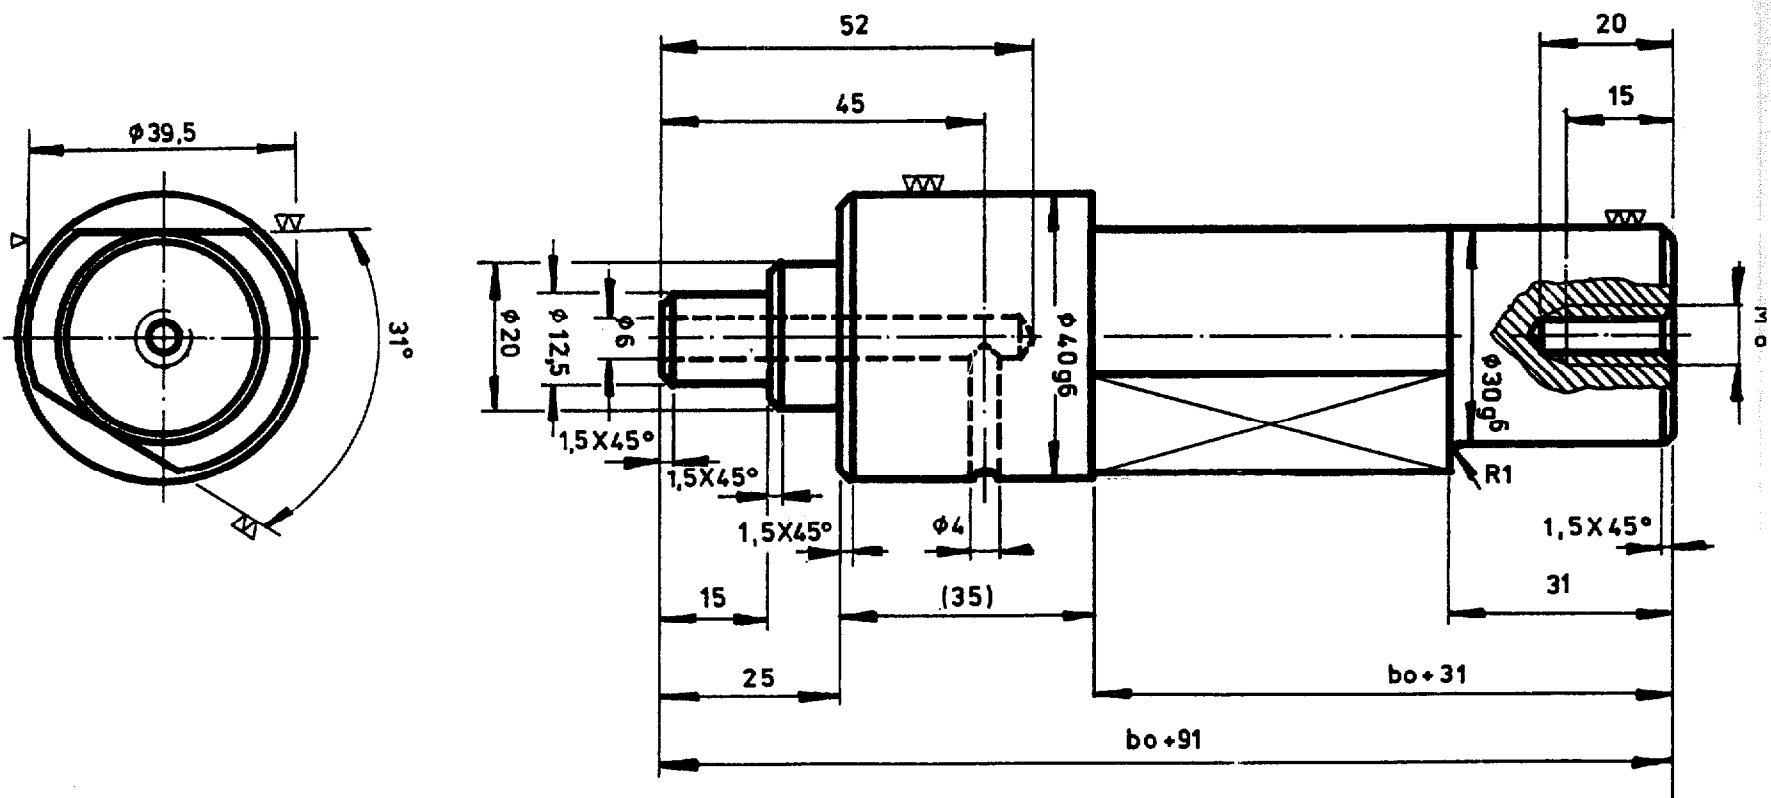

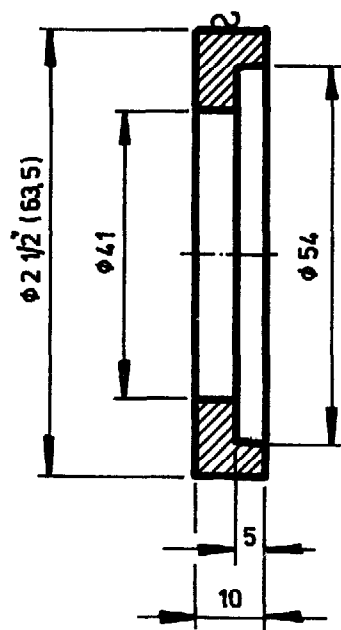

MS. ROD


1. PC

CUP BUSH

1:1

T3717/00

S 45

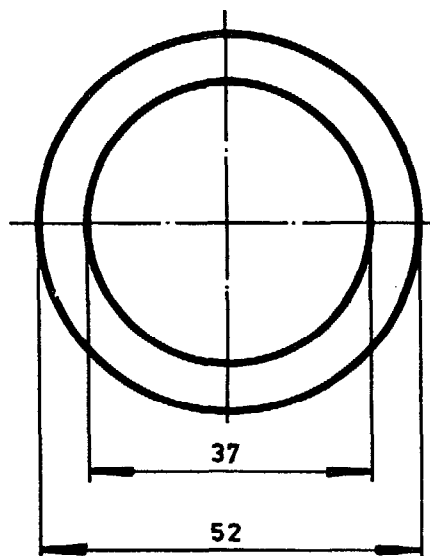

RUBBER 6MM



2.PCS

SEALING RING

T3/18/00

S46

1:1

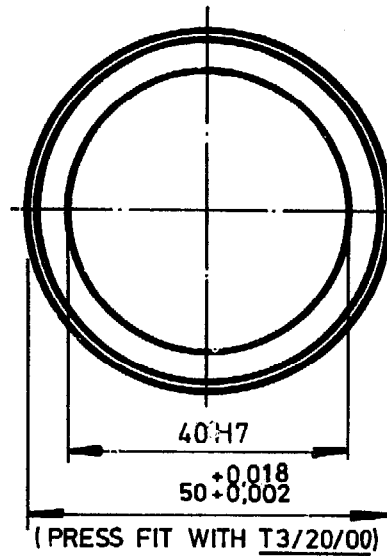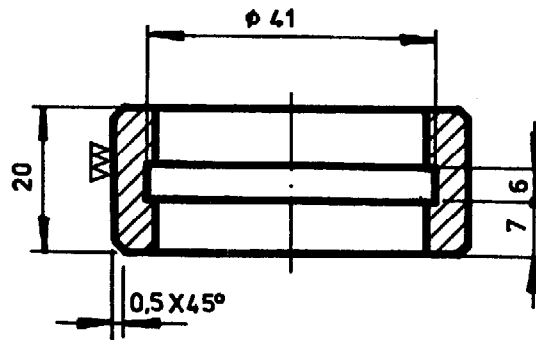



BRASS ROD 2" (50,8)

1 PC

PIVOTAL BUSH '1'

T3/19/00 S47

1:1

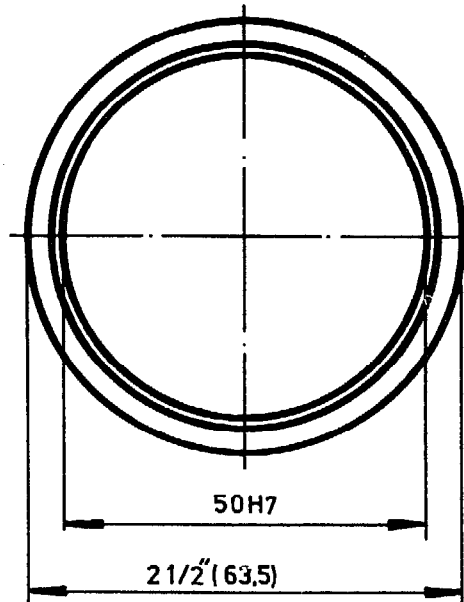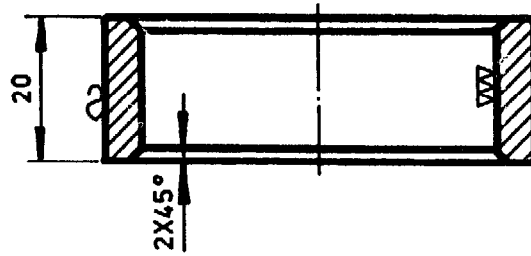


M.S. ROD

1.PC

BUSH CASING '1'

T3/20/00 S48

1:1

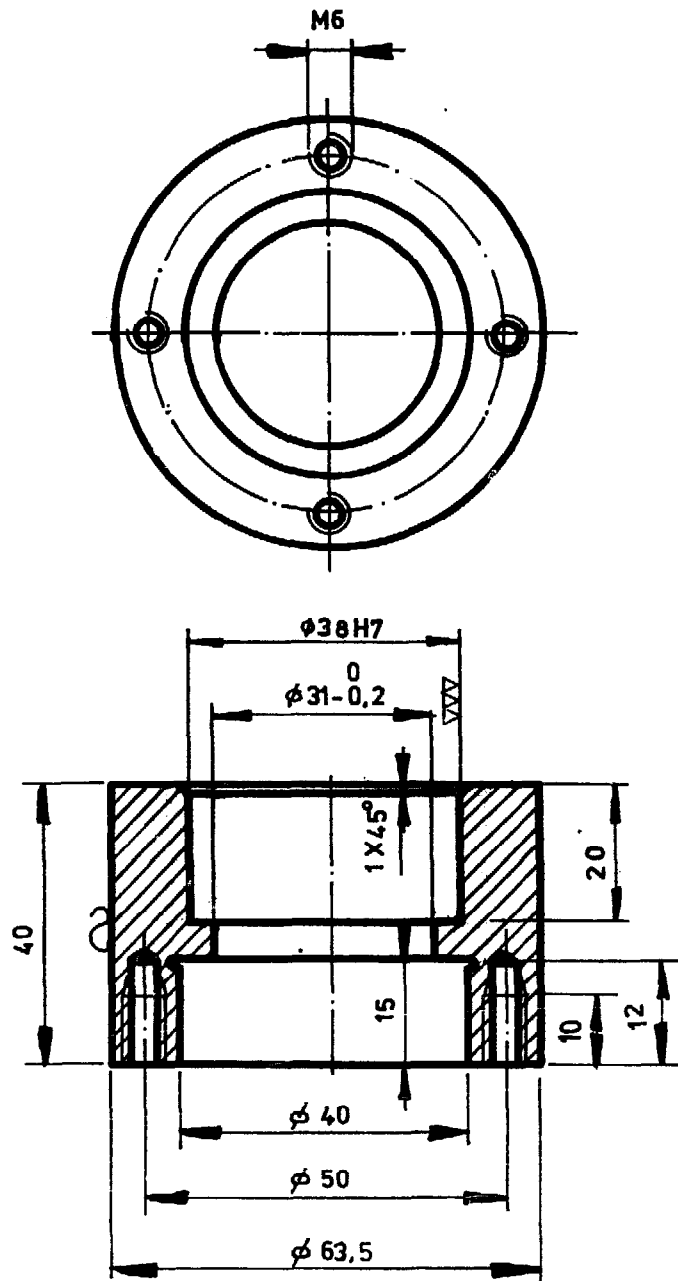

M.S. ROD $\phi 2\frac{1}{2}$ " (63,5)


1.PC

BUSH CASING '2'

T3/21/00

S49

1:1

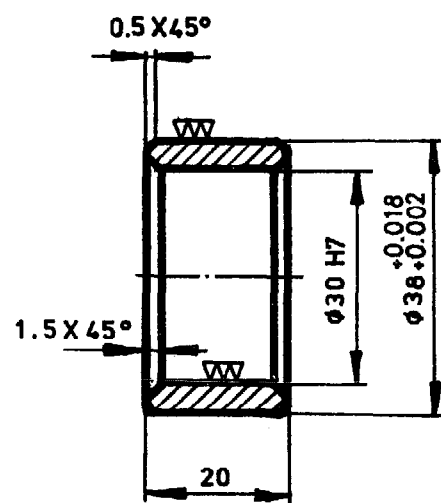



BRASS ROD

1.PC

PIVOTAL BUSH-2

T3/22/00 S50

1:1

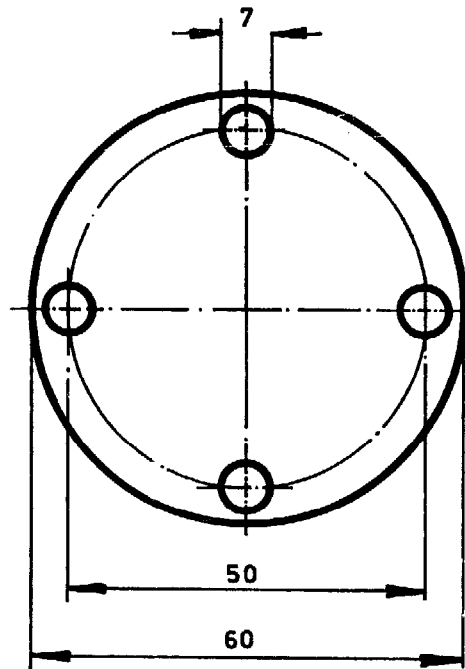

RUBBER SHEET 2 MM

1.PC



2.82

GASKET

1:1

T3/23/00

S51

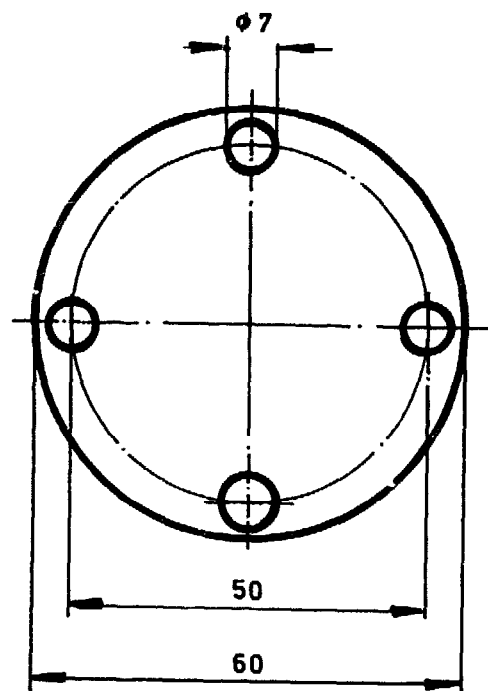

M.S. SHEET



1.PC

COVER

1:1

T3/24/00

S52

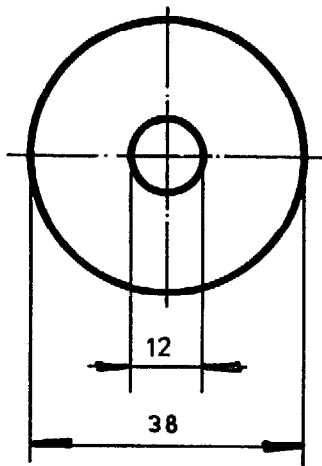

M.S. SHEET

1.PC



28.7.82

WASHER

1:1

T3/25/00

S53

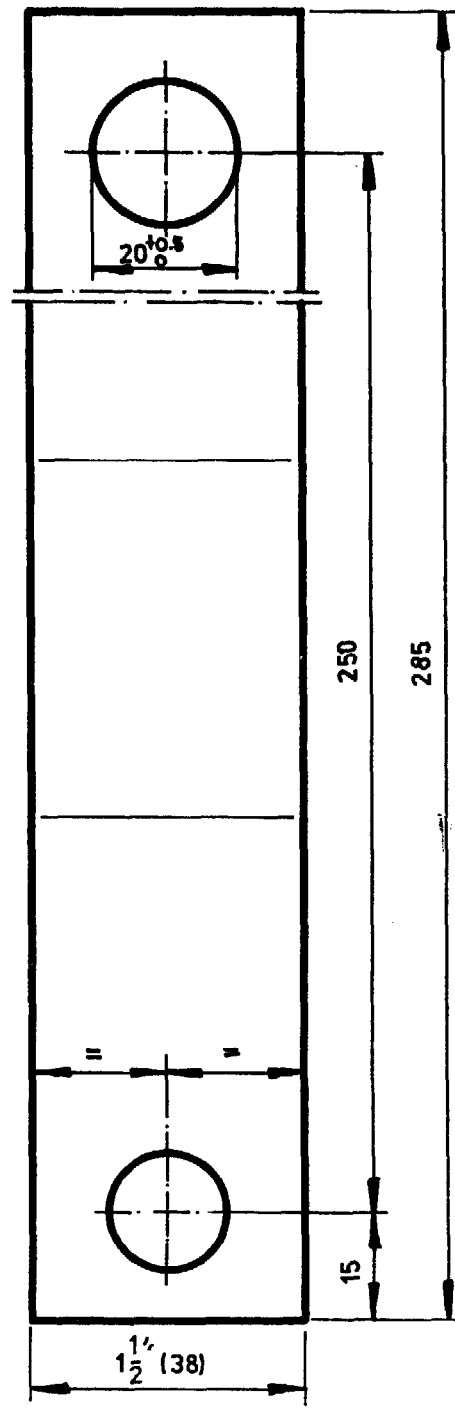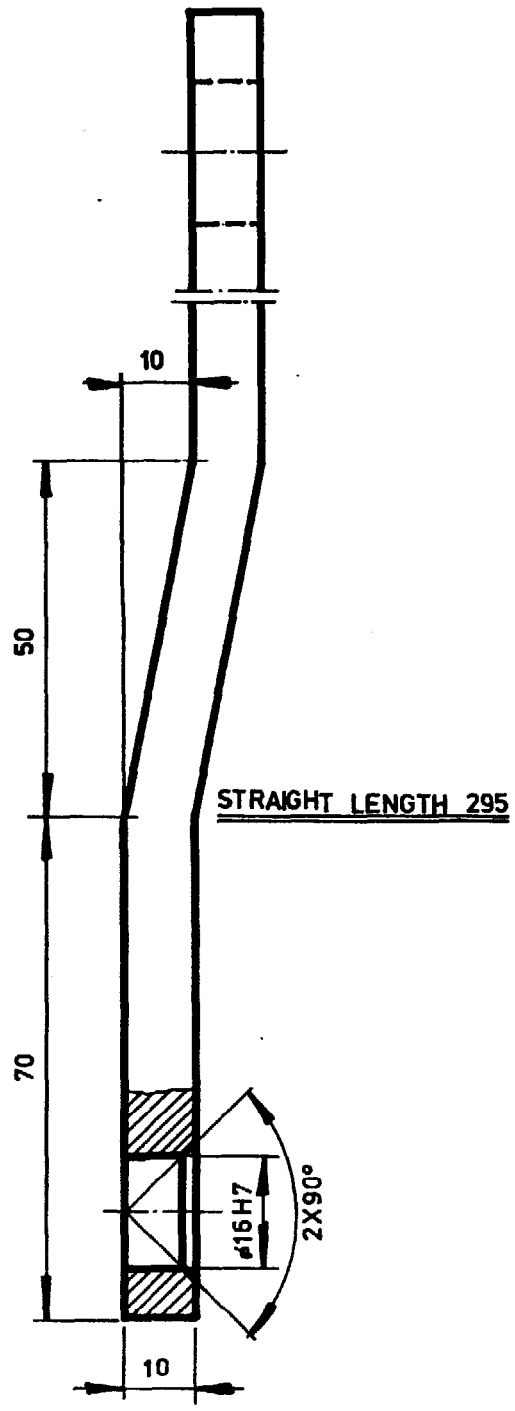



M.S.FLAT
1.PC

LEVER

T3/26/00

S54

1:1

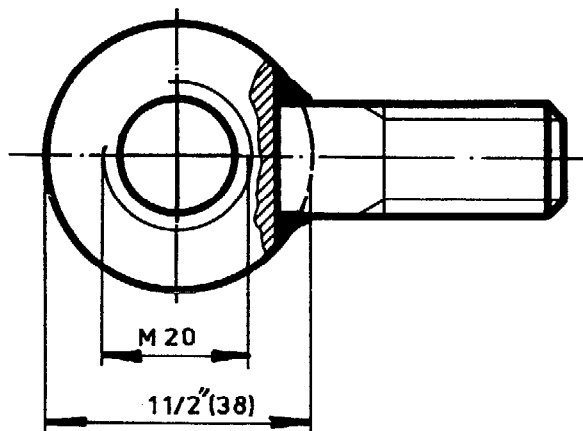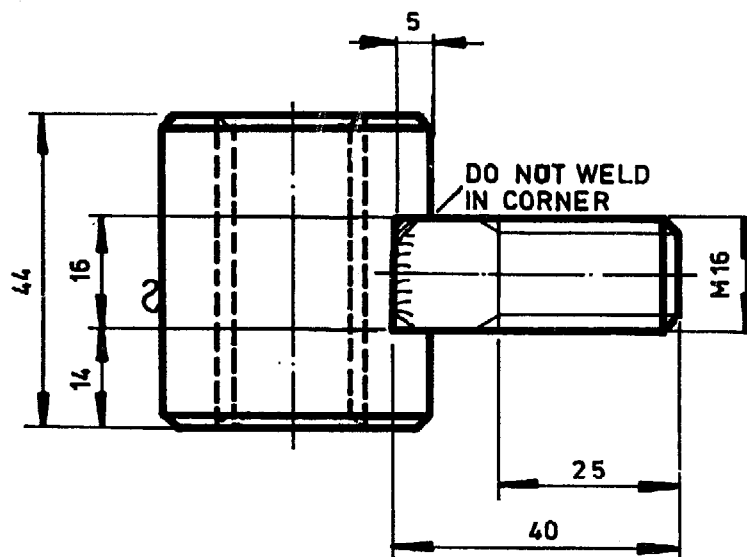


M.S. ROD

1.PC

LOCK NUT

T3/27/00 S55

1:1

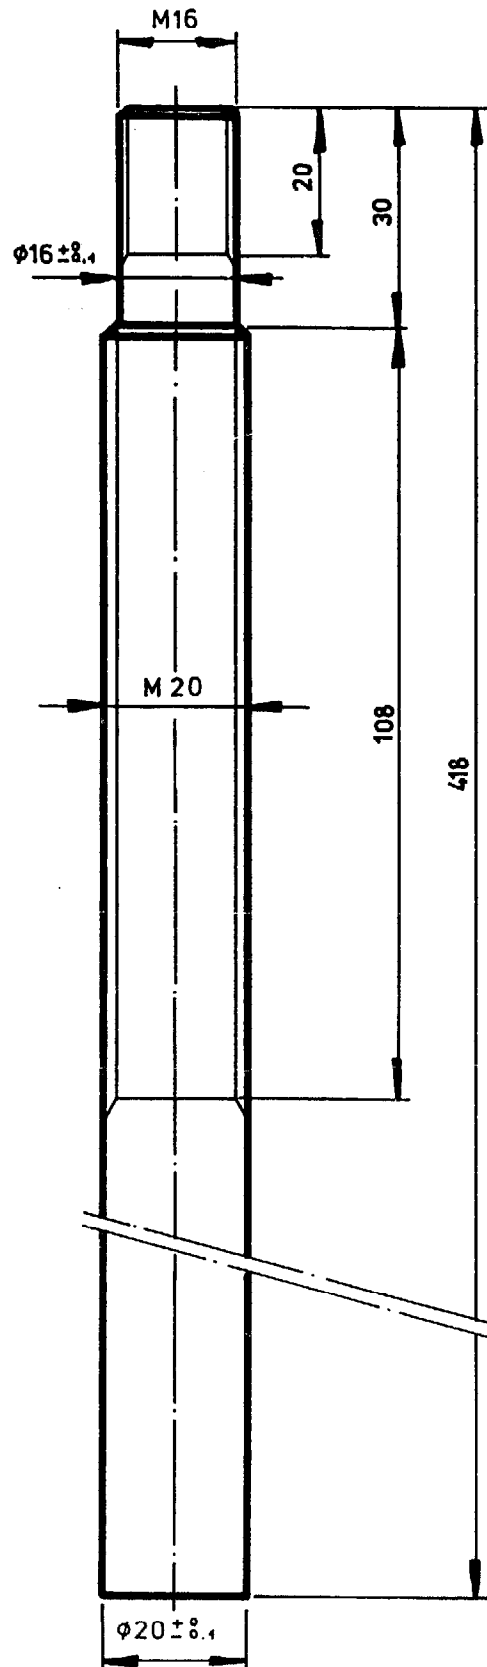

M.S. ROD

1 PC

SPINDLE

1:1

T3/28/00


S56

POS	PCS	DENOMINATION	DRAWING NUMBER	SPECIFICATION	REMARKS
1	1	BASE PLATE	T3/29/01	M.S.PLATE 10MMX80X50	
2	1	SUPPORT ANGLE	T3/29/02	M.S.ANGLE 50X50X6X570	
3	1	STOPPER PLATE BOTTOM	T3/29/03	M.S.PLATE 10MMX44X44	
4	1	STOPPER PLATE TOP	T3/29/04	M.S. PLATE 10MMX50X44	
5	1	SUPPORT TOP PLATE	T3/29/05	M.S.PLATE 10MMX50X50	

SUPPORT ASSEMBLY

T3/29/00 S57


PART LIST

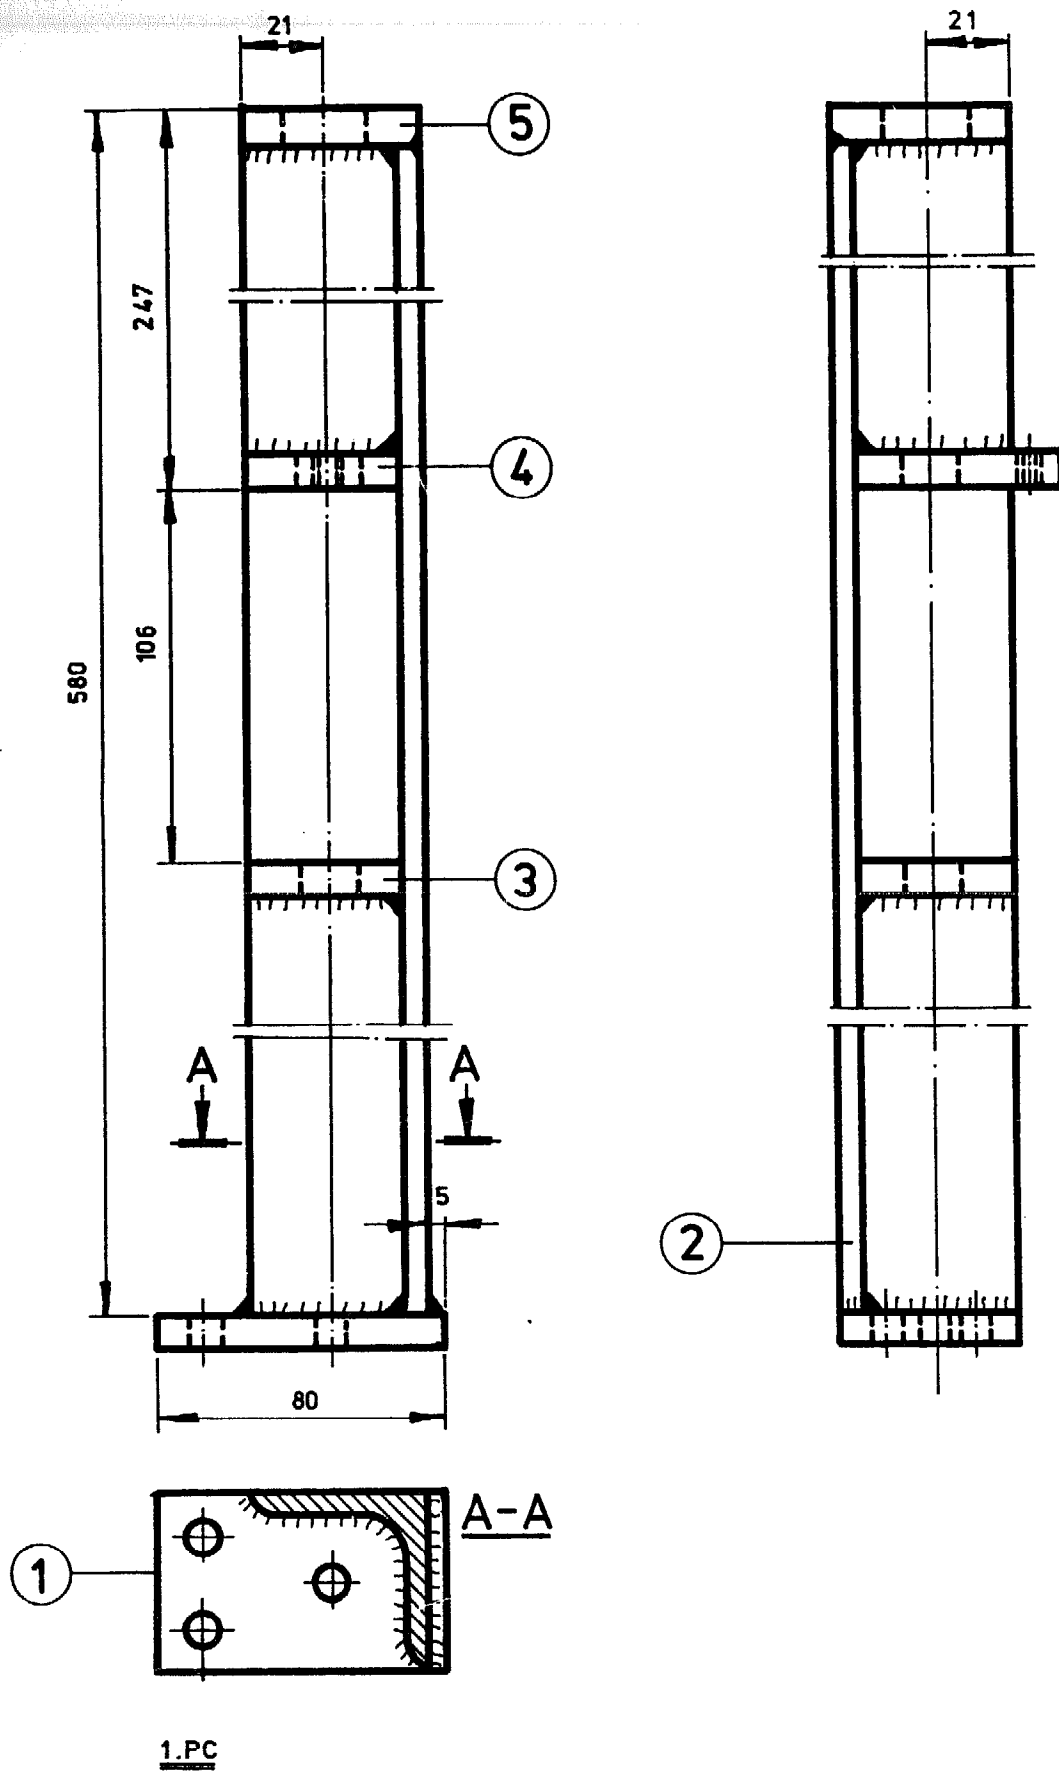

SUPPORT ASSEMBLY

T3/29/00 S58

1:2

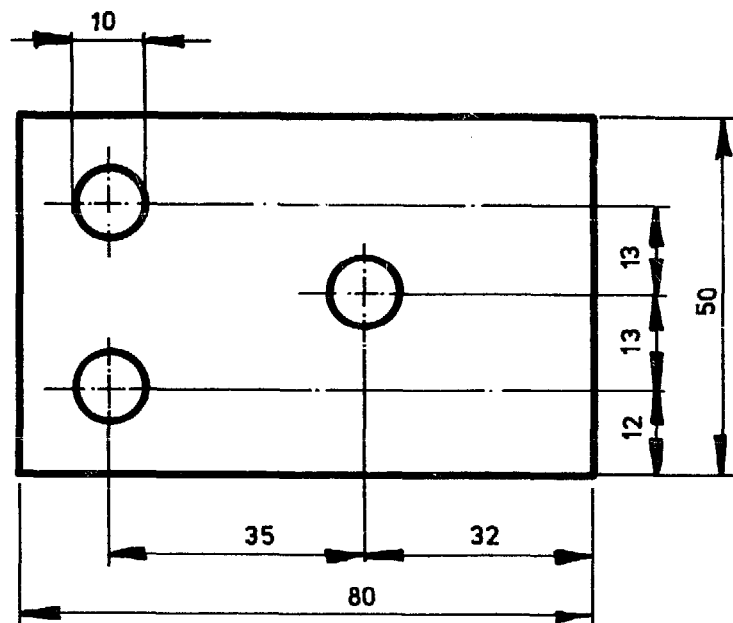

M.S.PLATE 10MM



1.PC

Ap 2.8.0

BASE PLATE

1:1

T3/29/01 S59

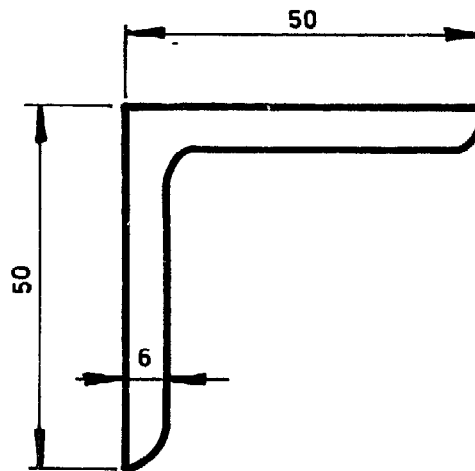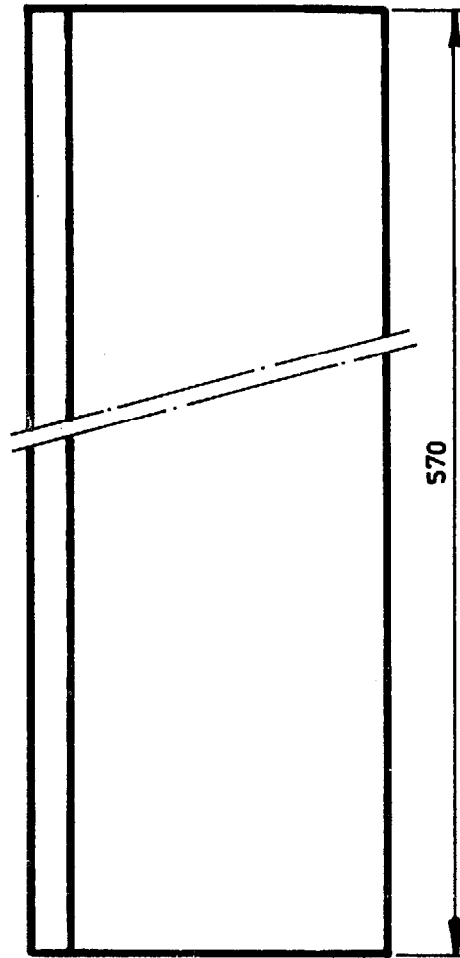

M.S. ANGLE

1.PC


7/2.82

SUPPORT ANGLE

1:1

T3/29/02

S60

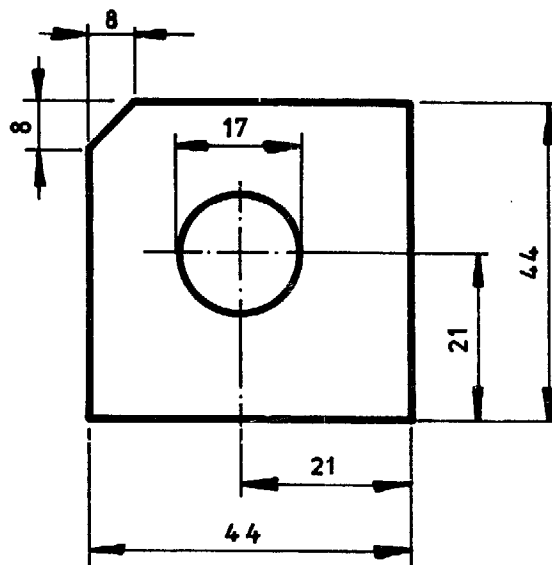


M.S. PLATE 10 MM

1.PC

STOPPER PLATE BOTTOM T3/29/03 S61

1:1

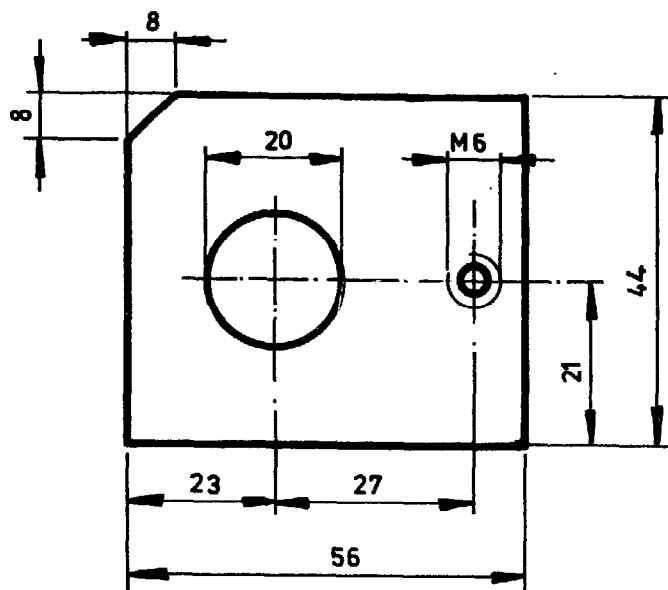


M.S. PLATE 10MM

1.PC

Ar. 82

STOPPER PLATE TOP

T3/29/04 S62

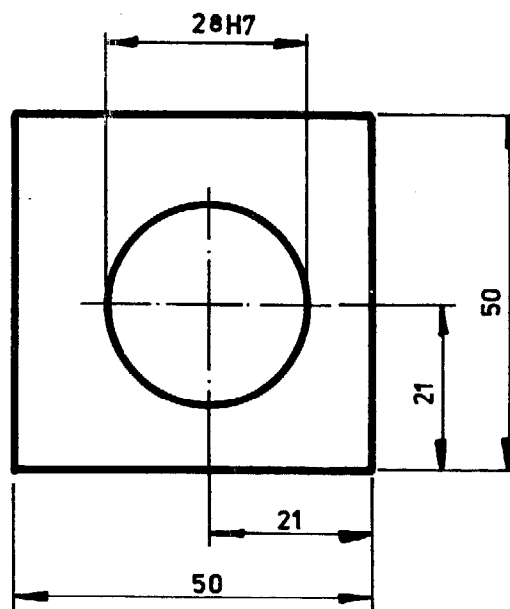


M.S.PLATE 10MM

1.PC

SUPPORT TOP PLATE

T3/29/05 S63

1:1

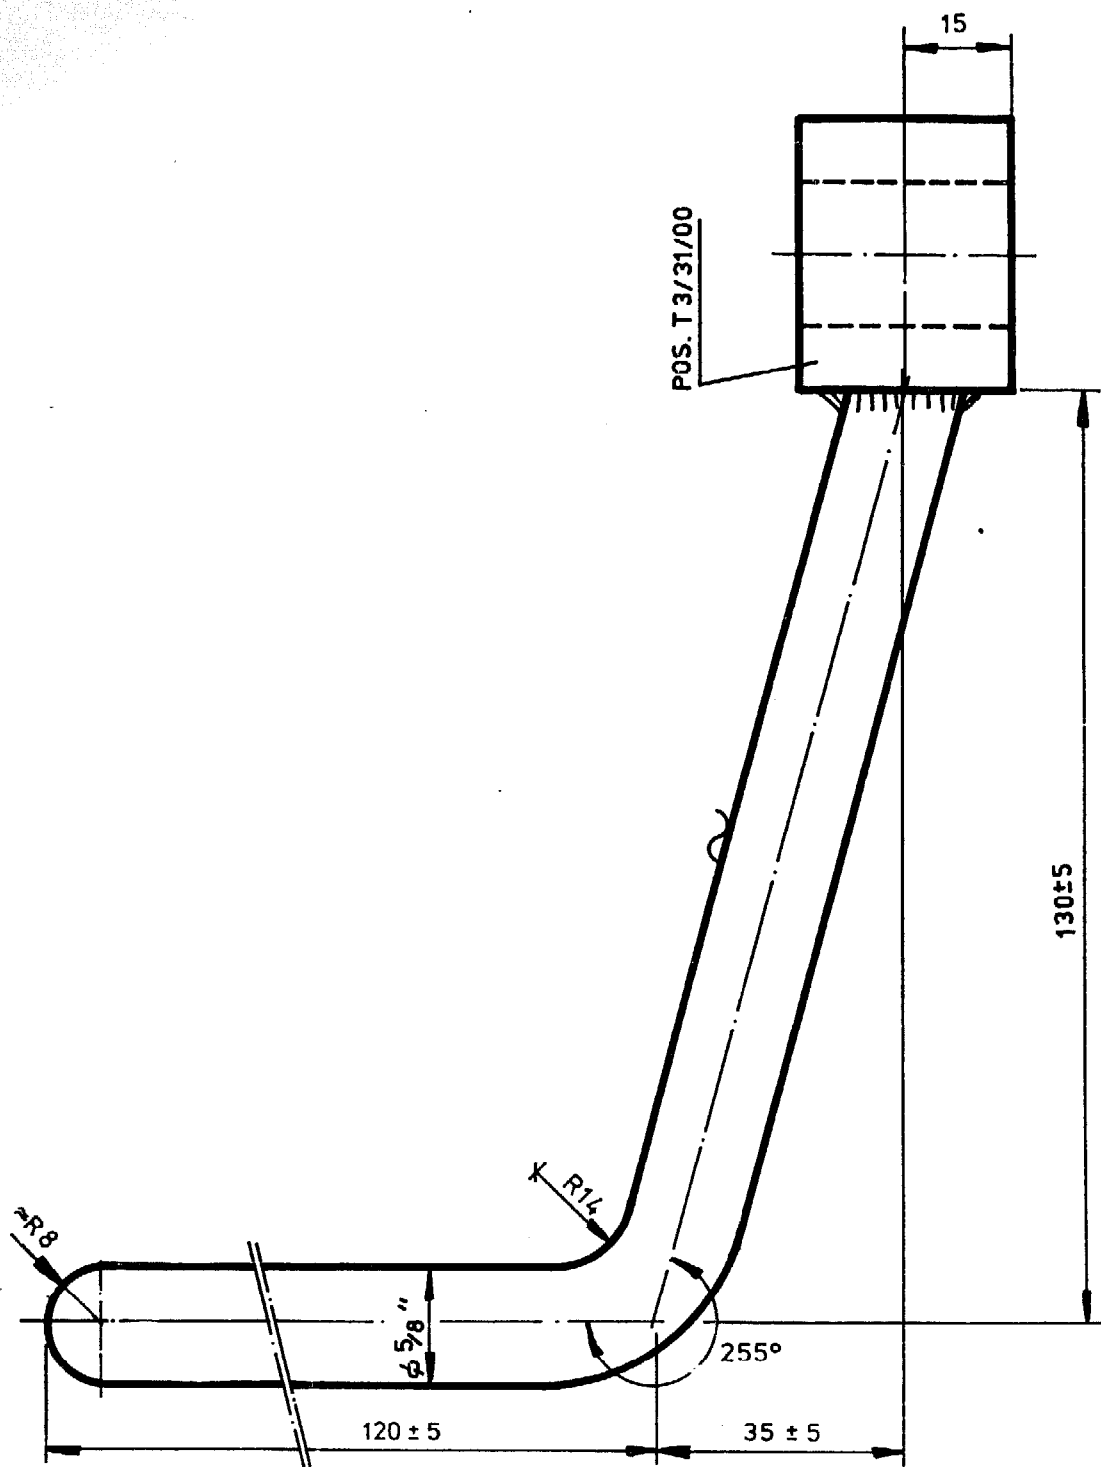


M.S. ROD (STRAIGHT LENGTH $\approx$ 253 MM)
1.PC

2.82

HANDLE

T3/30/00

S64

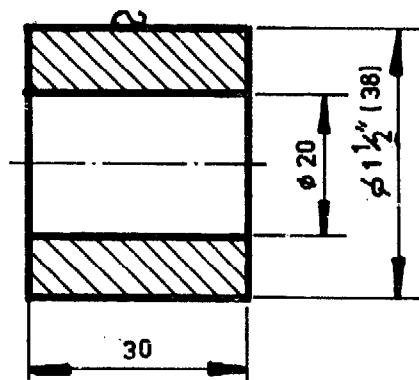

M.S. ROD


1.PC

KNOB

1:1

T3/31/00

S65

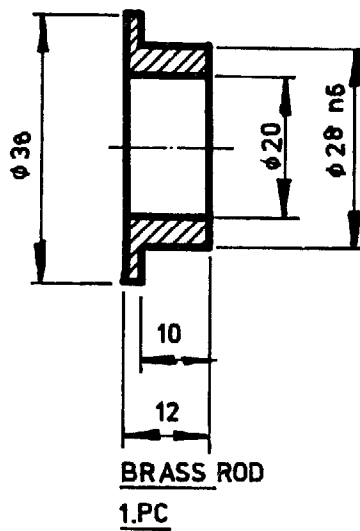


BUSH


1:1

T3/32/00

S66

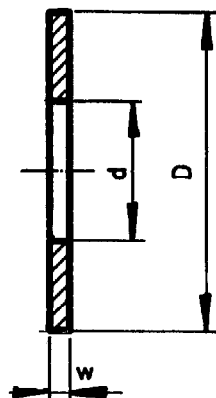

POS	D	d	w	PC
33	30	18	2	2
37	27	16	2	8





POS.T 3/34/00

1 PC

WASHER/COTTER PIN

T3/33 34 37/00 S67

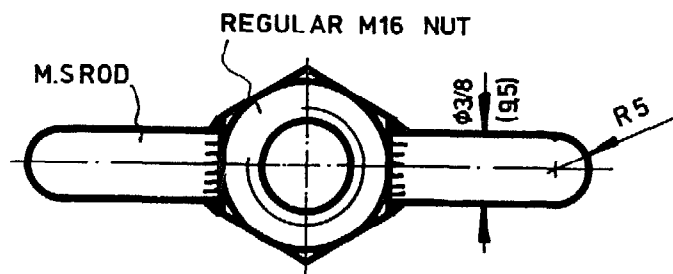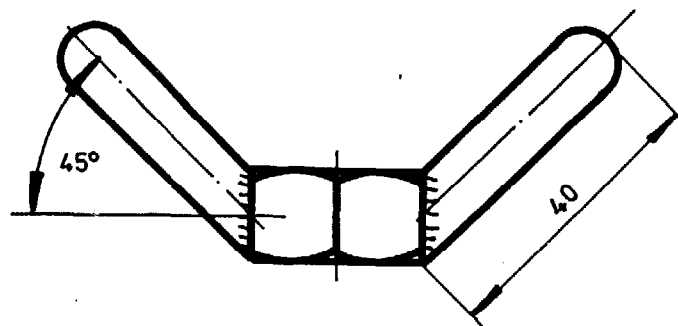


1.PC

WING NUT


T3/36/00

S69

1:1

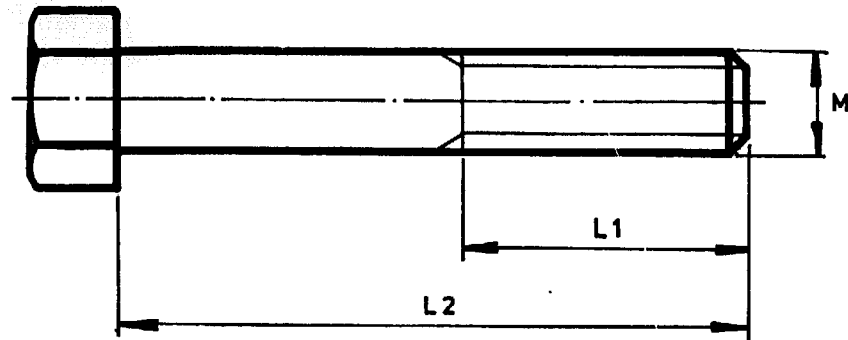

POS	M	L1	L2	FULL THREAD	NUMBER OF BOLTS										
					bo 50	bo 70	bo 90	bo 120	bo 160	bo 220	bo 290	bo 390	bo 520	bo 690	bo 920
38	M14	30	70	NO	8	8	8	8	8	8	8	8	8	8	8
39	M12	30	30	YES	22	22	22	26	26	30	34	38	46	54	64
41	M8	15	15	YES	1	1	1	1	1	1	1	1	1	1	1
42	M6	10	10	YES	4	4	4	4	4	4	4	4	4	4	4
43	M6	50	50	YES	8	8	8	8	8	8	8	8	8	8	8
45	M6	20	20	YES	12	14	14	16	18	18	20	22	26	30	38
47	M6	15	30	NO	3	3	3	3	3	3	3	3	3	3	3
49	M6	30	30	YES	1	1	1	1	1	1	1	1	1	1	1




POS	SIZE	NUMBER OF NUTS										
		bo50	bo70	bo90	bo120	bo160	bo220	bo290	bo390	bo520	bo690	bo920
40	M12	22	22	22	26	26	30	34	38	46	54	64
44	M6	8	8	8	8	8	8	8	8	8	8	8
46	M6	12	14	14	16	18	18	20	22	26	30	38
48	M6	3	3	3	3	3	3	3	3	3	3	3
50	M6	1	1	1	1	1	1	1	1	1	1	1
51	M16	2	2	2	2	2	2	2	2	2	2	2

HEX. NUT


T 3/40,44,46,48,50,51/00

S71

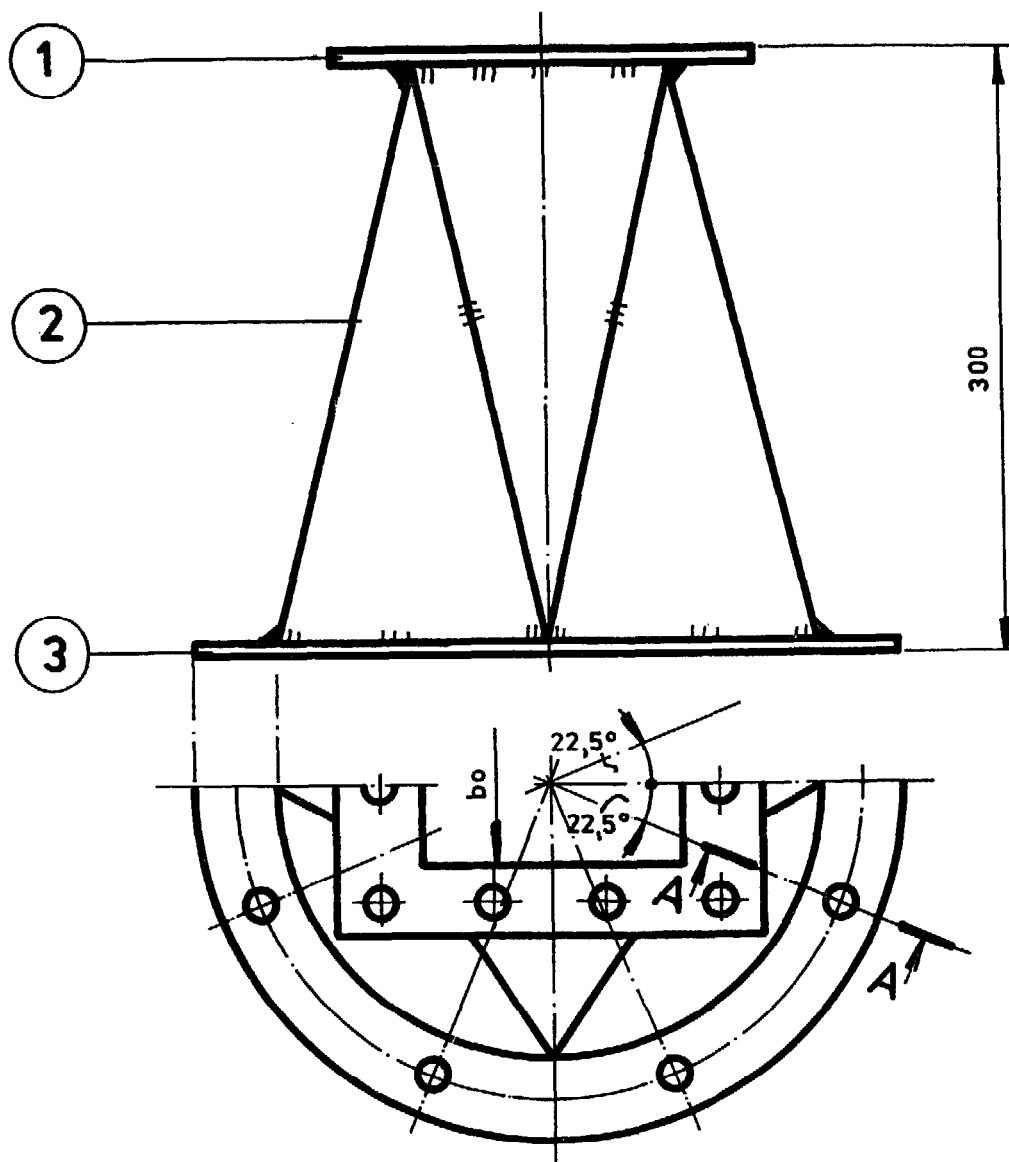


NOTE.

USE 1PC INLET FLANGE (T3/06/03)
FOR POS.1

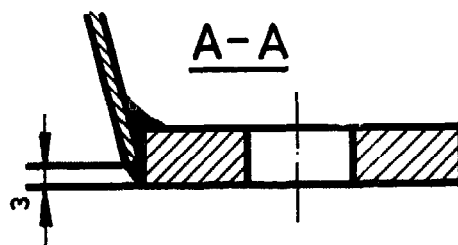

ADAPTER


T3/52/00 S73

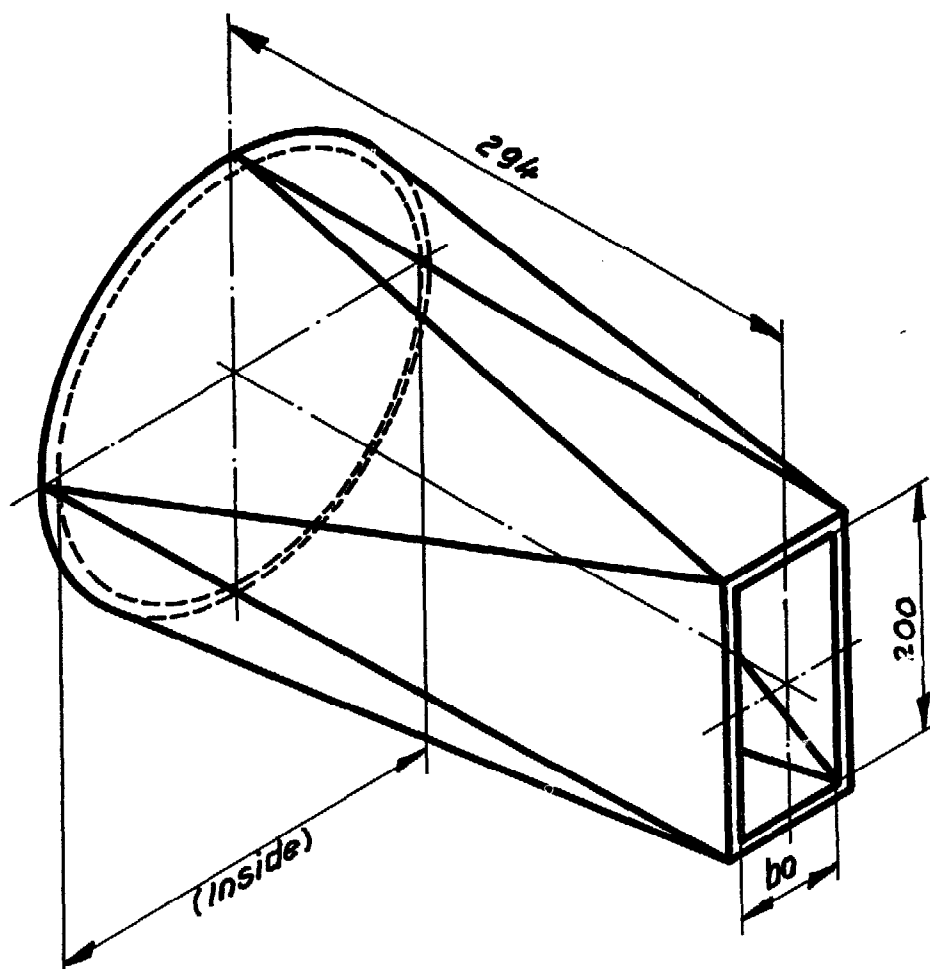

ADAPTER

T3/52/01

S74

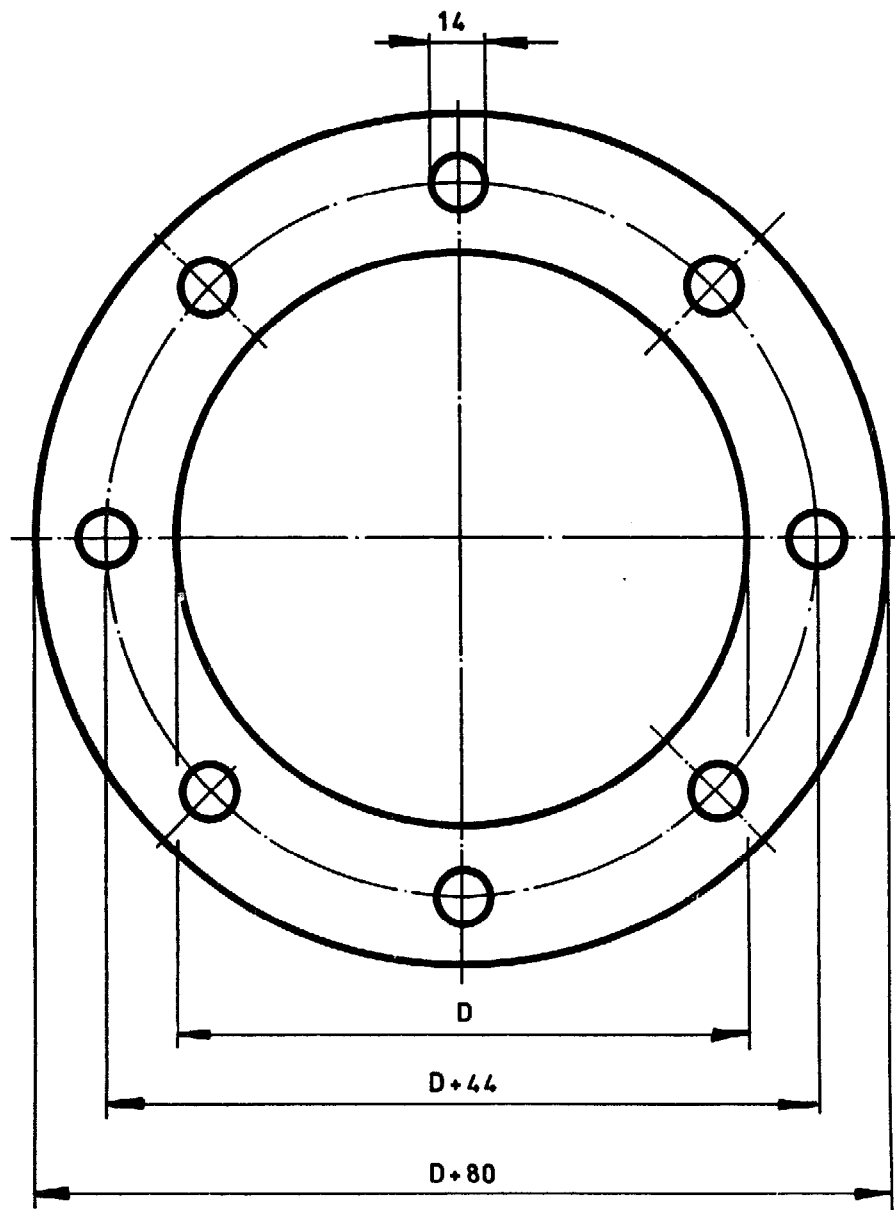

M.S. PLATE 8MM

$D = \text{INSIDE DIAMETER OF PENSTOCK} + 6$

PCS

PENSTOCK FLANGE

T3/52/01

S75